



2W Ultra Wide Band Power Amplifier 18GHz~47GHz

- High output power
- Microwave radio systems
- Satellite VSAT and DBS systems
- LMDS & Pt-Pt mmW Long Haul
- 802.16 & 802.20 WiMax BWA
- High Linearity and low noise figure
- All specifications can be modified upon request



Electrical Specifications, $T_A = +25^{\circ}\text{C}$, $V_{CC} = +12\text{V}$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	18 – 30		30 – 47				GHz
Gain		35			33		dB
Gain Flatness		±7			±5		dB
Gain Variation Over Temperature(-45 ~ +85)		±3			±3		dB
Noise Figure		13			13		dB
Input Return Loss		9			8		dB
Output Return Loss		10			10		dB
Output Power for 3 dB Compression (P3dB)		31.5			31.5		dBm
Output Third Order Intercept (IP3)		34			33		dBm
Supply Current (+12 VDC)		2200	4000		2200	4000	mA
Isolation S12	79	85		76	86		dB
Input Max Power(no damage)	Psat – Gain		Psat – Gain				dBm
Weight	1000						g
Impedance	50						Ohms
Input /Output Connector	2.4mm-Female (2.92mm female optional)						
Finishing	Nickel Plating						
Material	Aluminum/copper						

* P1dB, P3dB and Psat power test signal: 200µs pulse width with 10% duty cycle.

* For average CW power testing or increased duty cycle, a 5dB back off from Psat is required unless water/oil cooling system is applied.

Ultra Wide Band 2W Power Amplifier 18-47GHz



RF-LAMBDA

The power beyond expectations

RFLUPA18G47GD

Ultra Wide Band 2W Power Amplifier 18-47GHz

Absolute Maximum Ratings	
Supply Voltage	+28Vdc
RF Input Power (RFIN) Pin _{max} = Psat - Gainsat	Psat – Gain
Storage Temperature(C°)	-50 to +125

Note: Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves

Biasing Up Procedure	
Step 1	Connect ground pin
Step 2	Connect input and output with 50 Ohm source/load. (in band VSWR<1.9:1 or >10dB return loss)
Step 3	Connect +12V
Power OFF Procedure	
Step 1	Turn off +12V
Step 2	Remove RF connection
Step 3	Remove Ground.

Environment Specifications	
Operational Temperature (C°)	-45 ~ +85(Case Temperature must be less than 85C all time)
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°c
Shock	20G for 11msc half sin wave,3 axis both directions

Note: The operating temperature for the unit is specified at the package base. It is the user's responsibility to ensure the part is in an environment capable of maintaining the temperature within the specified limits

Ordering Information		
Part No	ECCN	Description
RFLUPA18G47GD	EAR99	18GHz~47GHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF-Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.


Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?


Each of RF-Lambda amplifiers will go through power and temperature stress testing. Due to fragile of the die, IC or MMIC, those are not covered by warranty. Any damage to those will NOT be free to repair.




Gain

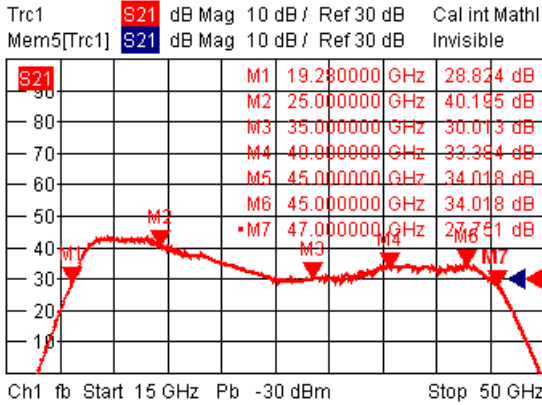


Input Return Loss

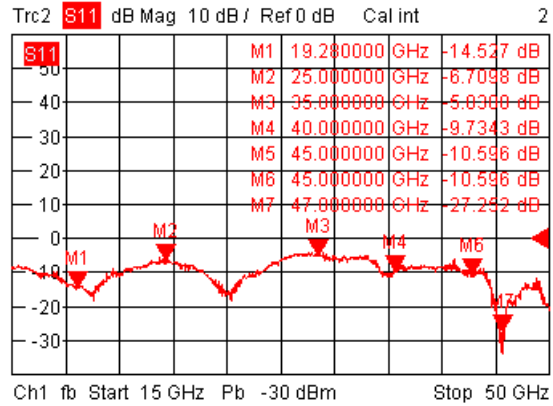



Isolation

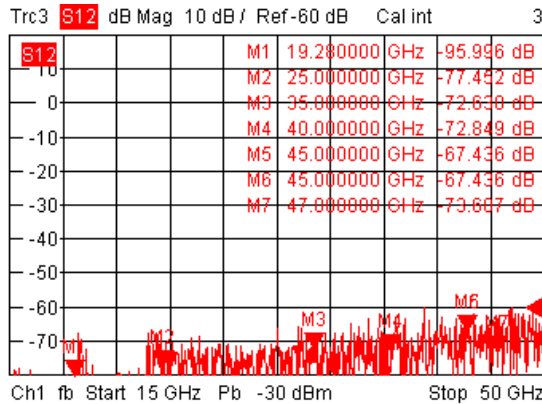

Output Return Loss

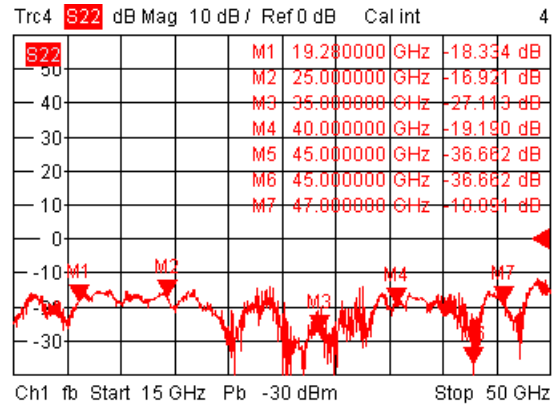

Note: Input/output return loss measurements include attenuators to protect equipment

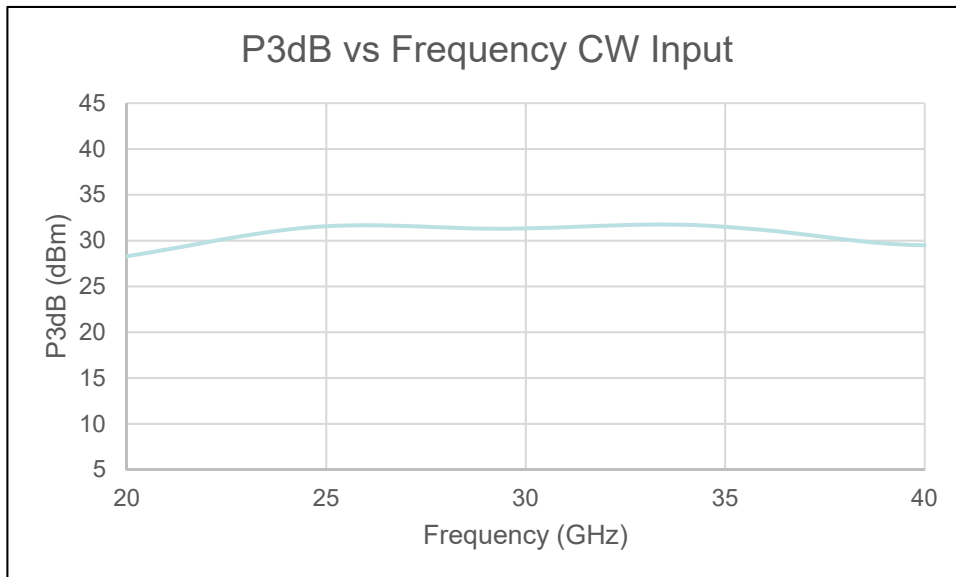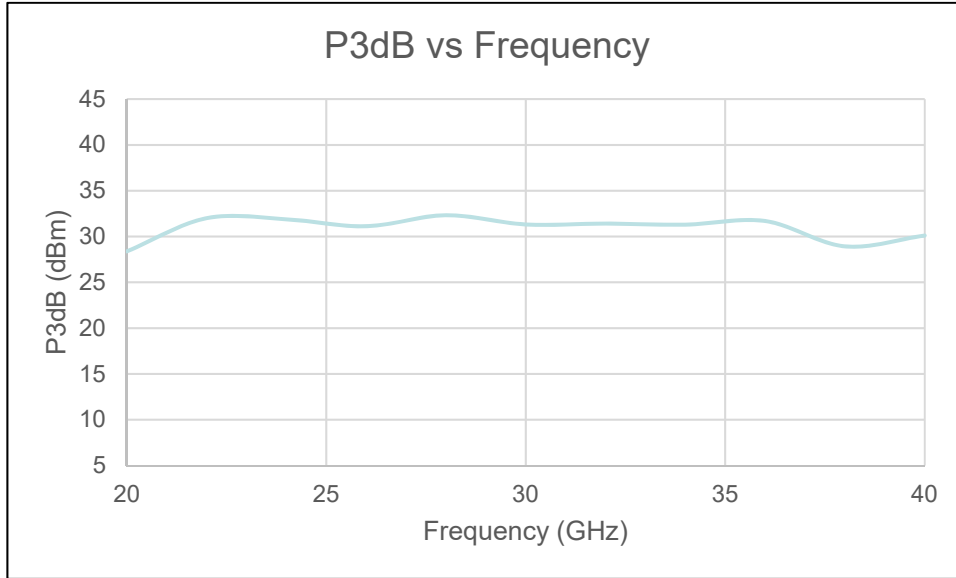




RF-LAMBDA

The power beyond expectations

RFLUPA18G47GD

Ultra Wide Band 2W Power Amplifier 18-47GHz

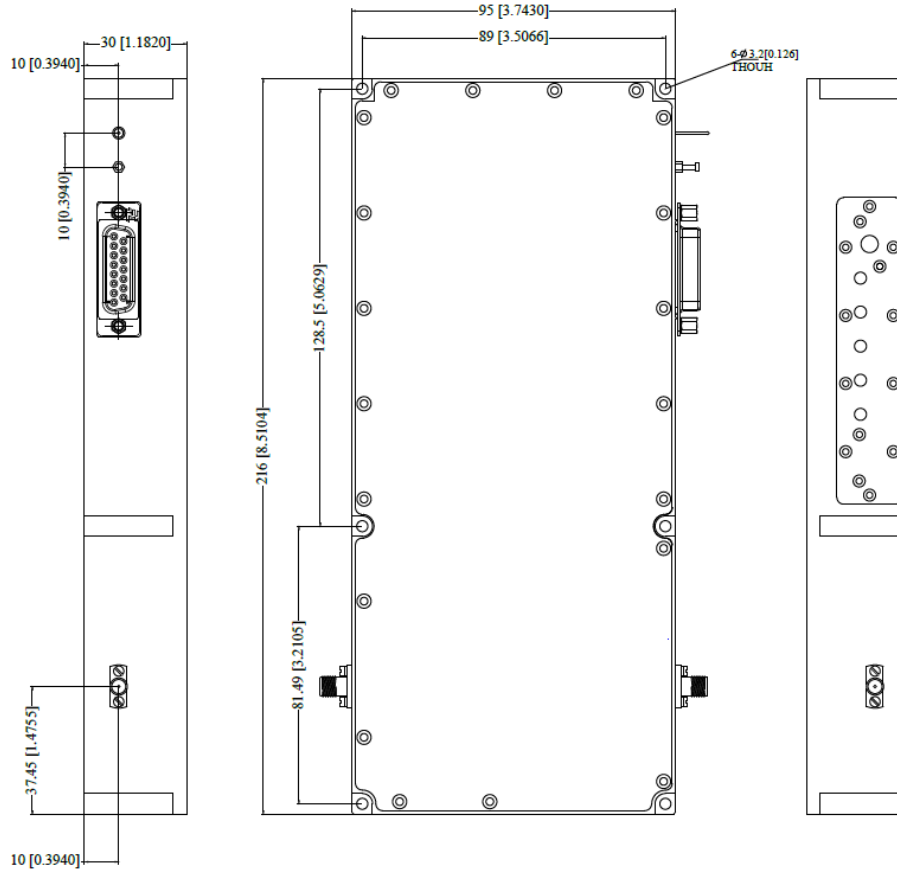

Heat Sink and cooling fan required during operation



Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.