


Lightning Protector 6GHZ

Frequency	0-6 GHz
VSWR	1:1.6 Max
Insertion Loss	0.8 dBi Max
Impedence	50 Ohm
Gas Tube DC	230V±20%
Breakdown Voltage	
Gas Tube Impulse	≧ 700V
Breakdown Voltage	
Gas Tube Insulation	≧ 10000 M Ohm
Resistance	
Max Withstand Current	5 K V
RF Power Rating	25 W



P.O. Box 1 Hornsby
NSW 1630 Australia

Tel: (02) 9482 1944 Fax: (02) 9482 1309

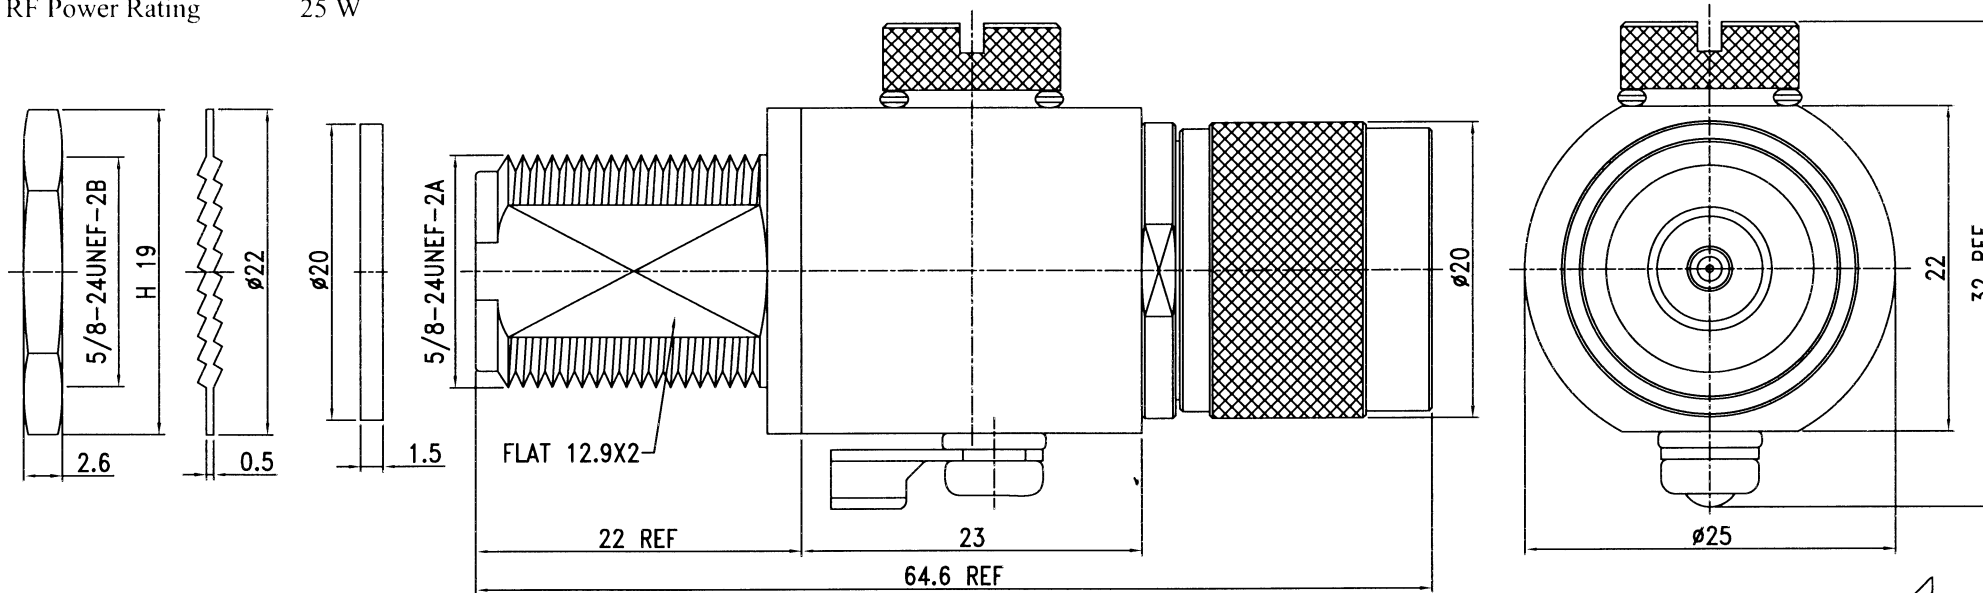

8.	Nut	Brass	1	Nickel
7.	Washer	Brass	1	Nickel
6.	Gasket	Silicone	1	Red
5.	Insulation	Teflon	2	None
4.	Pin	Brass	1	Gold
3.	Body	Brass	1	Nickel
2.	Body	Brass	1	Nickel
1.	Body	Brass	1	Nickel
NO.	DESCRIPTION	MATERIAL	Q' TY	FINISH

DRAWN	SCALE	UNITS
Jenny	2:1	mm
CHECKED	TOLERANCE	
<i>Peter</i>	.X	±0.2
APPROVAL	.XX	±0.1
<i>Peter</i>	.XXX	±0.05
	ANGLE	±0.5°

RoHS
STOCK
CODE:

LP6GHZN

ph: (02) 9482 1944
www.clarke.com.au

QTY: