


# BI-LOBE<sup>®</sup> | NANO-D

MISSION-CRITICAL INTERCONNECTION TECHNOLOGIES FOR  
RUGGED AND HARSH ENVIRONMENT

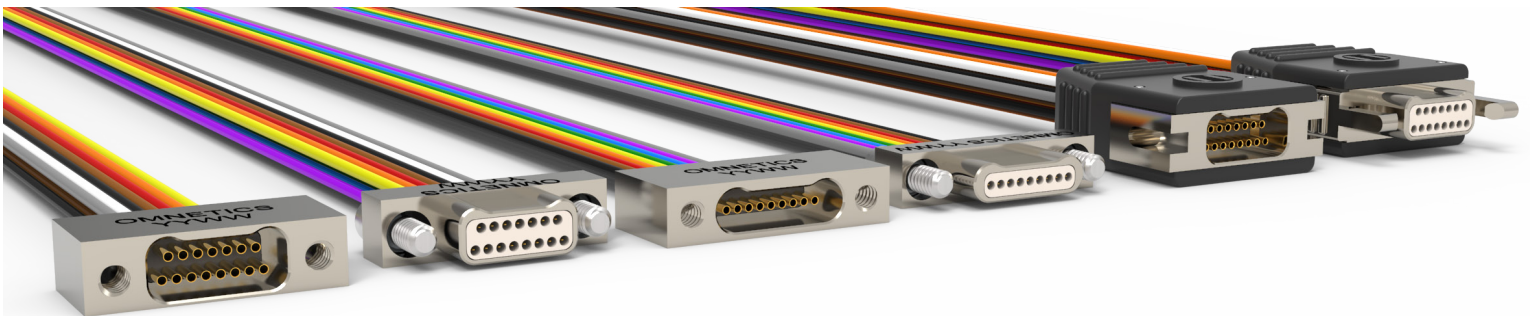

**OMNETICS**  
CONNECTOR CORPORATION

**Omnetics Connector Corporation** is a leading global provider of precision and high-reliability electronic connectors and interconnect systems.


For more than 30 years, we have engineered an extensive portfolio of innovative products, with a special focus on micro-miniature and nano-miniature interconnects. Our connectors are among the smallest on the market and deliver exceptional performance in challenging work environments. As interconnect technologies continue to evolve, we design next-generation products that help bring transformative ideas to life.

Our connectors are highly sought after by designers working in the medical, military, aviation, aerospace, and other leading-edge industries. Omnetics understands the rigorous operating conditions mission-critical applications endure and our solutions include EMI shielding, IP sealing, polarization, rugged materials, and other elements that ensure connectivity under pressure. We maintain a large inventory of off-the-shelf products.

**Our high-reliability portfolio includes:**

- Micro and nano strip connectors*
- Micro and nano circular connectors*
- Nano-D / Bi-Lobe®*
- Polarized nano connectors*
- Squeeze-latching nano connectors*
- MIL-DTL-32139 Nano-D connectors*
- MIL-DTL-83513 Micro-D connectors*
- Micro-D and latching Micro-D connectors*
- Hybrid connector configurations*
- Cable assemblies*

**We take great pride in the products we build for you.** Our design team works closely with customers to create new and custom interconnect solutions for tomorrow's innovative products. Our connectors are designed, produced, and tested by hand at our plant in the United States. Omnetics is a privately held company and we exist to advance innovation wherever it is needed next.

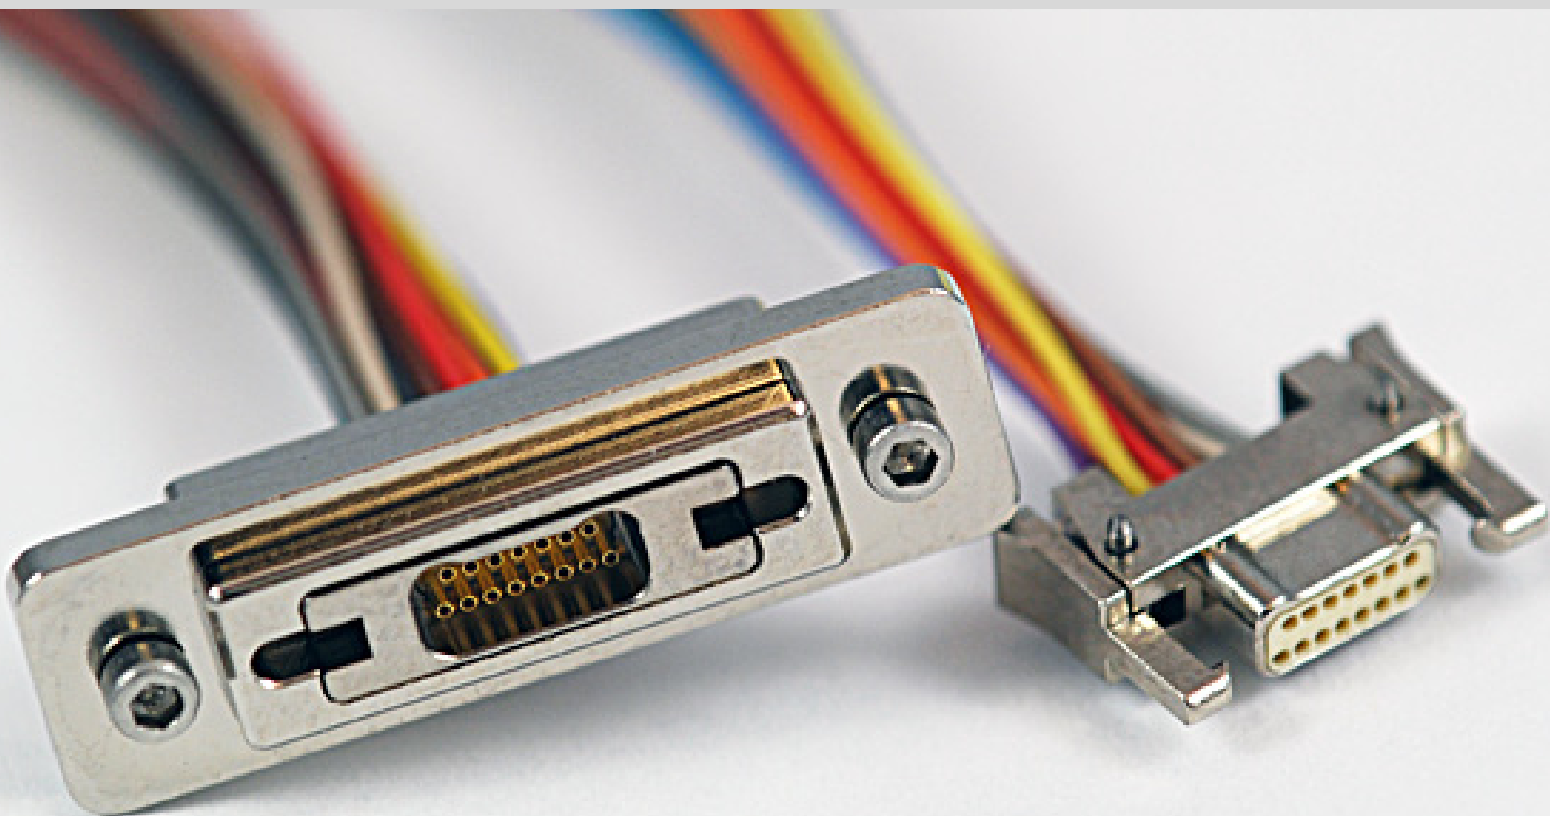


## INDEX

<b>SPECIFICATIONS</b>	<b>4</b>
<b>MIL-DTL-32139 / NANO-D</b>	<b>10</b>
<b>DUAL ROW</b>	<b>14</b>
<b>SINGLE ROW</b>	<b>74</b>
<b>MOUNTING HARDWARE &amp; TOOLS</b>	<b>104</b>
<b>CONNECTOR SAVERS</b>	<b>105</b>
<b>PANEL MOUNT CUTOUT</b>	<b>106</b>

## THE FLEX PIN

Omnetics' groundbreaking Flex Pin contact design pre-dates the advent of the MIL-DTL-32139 nano-miniature specification and today all MIL-DTL-32139 sockets mate properly with the Flex Pin. The one-piece unit is stamped from ASTM B194 beryllium copper (BeCu) to deliver high conductivity, low interference, and high resiliency. Its excellent spring properties enable it to withstand shock, vibration, and other rugged conditions and it easily passes military specification requirements.

Flex Pin contacts are plated with 50 micro-inches (1.27 $\mu$ m) of gold over 50 micro-inches (1.27 $\mu$ m) of nickel and are rated at 1 amp each. All pins are plated post-forming to verify a no raw edges surface. Our contacts are inspected by our quality assurance experts to guarantee perfection and performance.

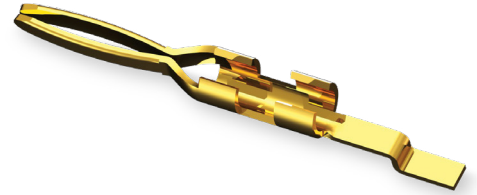

Many high-reliability applications have scaled down to meet size, weight and power (SWaP) goals, and the Flex Pin has evolved too. Omnetics has taken a unique approach to this industry-wide phenomenon. While many Nano-D manufacturers simply reduced an existing standard, Omnetics reengineered the Flex Pin to improve the design's performance in our smaller Bi-Lobe<sup>®</sup> package sizes. The Nano Flex Pin features an elegant one-piece design that eliminates the extra crimp welds seen in many overly complex twist pins. Eliminating these excess resistance points helps ensure strength and reliability at every scale. Omnetics' gold-plated Nano Flex Pins are the rugged and reliable foundation of our Bi-Lobe<sup>®</sup> and MIL-DTL-32139 series of connectors.



**SPACE LEVEL SCREENING**  
 [PER EEE-INST-002]

**Ordering steps**

**Step 1** - Choose a suitable Micro or Nano connector

**Step 2** - Choose a level of Space Screening

*Level 1 - Mission Critical (Highest Reliability)*

*Level 2 - High Reliability*

*Level 3 - Standard Reliability*

**Step 3** - Select any added outgassing processing needed.

**Step 4** - Select Qualification Level.

**Step 5** - Specify chosen Ordering Codes from table below.

These codes should be used as separate line items on all Quote Requests and Purchase Orders as required.



**Ordering Codes (quoted as separate line items)**

Test Level	Ordering Codes	Processing for Outgassing
Screening Level 1 - Mission Critical	SPT1	All standard materials exhibit less than 1.0% TML without additional processing. Contact service for special requirements.
Screening Level 2 - High Reliability	SPT2	
Screening Level 3 - Standard Reliability		
Qualification Level 1	QT1	
Qualification Level 2	QT2	
Qualification Level 3	QT3	

**Table 1: Screening Requirements**

Inspection / Test	Nano (.025" center)	
	Level 1 Com'l/SCD	Level 2 Com'l/SCD
Visual	100%	100%
Mechanical	2 (0)	2 (0)
Voltage Rating (DWV)	100%	2 (0)
Insulation Resistance	2 (0)	2 (0)
Temperature Cycling	2 (0)	2 (0)
Low Level Contact Resistance	2 (0)	2 (0)
Mating / Unmating Force	2 (0)	-
Solderability / Resistance to Heat (SMT & Thru-Hole only)	2 (0)	-



**Table 2: Qualifications For Nano-D Connectors**

Inspection / Test	Test Methods, Conditons, Requirements	Quantity		
		Level 1	Level 2	Level 3
Visual	Insert / Insulator Body	3 (0)	2 (0)	
	Contact Positioning			
	Shell / Body			
	Threads			
	Adhesives / Molding Material			
	Leads			
Mechanical	Dimensions per Catalog	3 (0)	2 (0)	
Dielectric Withstanding Voltage (Sea Level)	MIL-DTL-32139, Para 4.8.7.1 EIA-364-20, Test Condition I	3 (0)		
Insulation Resistance	MIL-DTL-32139, Para 4.7.7 EIA-364-21	3 (0)	2 (0)	
Temperature Cycling	MIL-DTL-32139, Para 4.7.13 EIA-364-32, Test Condition I	3 (0) **	2 (0) **	
Low Signal Level Contact Resistance	MIL-DTL-32139, Para 4.7.16 EIA-364-23	3 (0)	2 (0)	
Contact Engagement & Separation Forces	MIL-DTL-32139, Para 4.7.5	3 (0)		
Contact Retention / Wire Retention	MIL-DTL-32139, Para 4.7.18 EIA-364-29	3 (0)		
Solderability & Resistance to Soldering Heat	MIL-STD-202-208 MIL-DTL-32139, EIA-364-56	3 (0) **		
Mating & Unmating Force	MIL-DTL-32139, Para 3.7.3	2 (0)	3 (0)	
Shock	MIL-DTL-32139, Para 4.7.11 EIA-364-27	2 (0) **	3 (0) *	
Vibration	MIL-DTL-32139, Para 4.7.10 EIA-364-28	3 (0) **		
Evaluaiion of Material Outgassing Properties	ASTM E595 (125°C, 24Hrs)	*	*	

\* Omnetics connectors within the scope of this document meet the outgassing requirements of M32139 and no additional baking is required.

\*\* Destructive tests require additional samples which will be added to the order by Omnetics.

## BI-LOBE® / NANO-D AND MIL-DTL-32139 SPECIFICATIONS

### 1. SCOPE

Omnetics Bi-Lobe® and MIL-DTL-32139 series of nano-D connectors are precision-engineered to meet or exceed MIL-DTL-32139 specifications. These nano-miniature connectors feature tightly-packed contacts with centerlines of 0.025" (.64 mm). Our mission is to provide designers of high-reliability and critical systems with dependable and compliant components, whether they choose QPL or non-QPL versions.

### 2. PRECEDENCE OF REQUIREMENTS

The specifications herein are a select summary of those called out in MIL-DTL-32139. The complete controlled version of MIL-DTL-32139 from DLA takes precedence over these pages. For non-QPL parts, requirements of customer specifications and Omnetics' detail drawings will take top priority.

### 3. QUALITY & MATERIAL

#### 3.1. Statistical Process Control (SPC)

Omnetics uses statistical process control (SPC) techniques, when possible, in the manufacturing of Bi-Lobe® nano connectors. The SPC program is maintained in accordance with MIL-STD-790. Where SPC cannot be utilized because of non-continuous production, a lot sampling plan for inspection with C = 0 (accept on zero defects) may be utilized. The SPC and C = 0 programs are documented and maintained as part of our overall reliability assurance program, as specified in MIL-STD-790.

#### 3.2. Pin Contact Finish

Pin contacts are gold plated in accordance with ASTM B488, Type II, Code C, Class 1. 27, 50 micro inches minimum thickness, over 50 μinches of nickel minimum.

#### 3.3. Socket Contact Finish

Socket contacts are gold plated in accordance with ASTM B488, Type II, Code C, Class 1. 27, 50 micro inches minimum thickness, over 50 μinches of nickel minimum.

#### 3.4. Insulator Material

Insulator material for connectors is LCP in accordance with ASTM D5138.

#### 3.5. Shells

Shell options include the following materials:

**3.5.1.** Aluminum, alloy 6061 per SAE-AMS-QQ-A-200/8 or ASTM B221, plated as follows:

**3.5.1.1.** Electroless Nickel plated (500 micro inches MIN) per

SAE-AMS-C-2404, class 4.

**3.5.1.2.** Cadmium plated per SAE-AMS-QQ-P-416, type II, class 1, yellow chromate.

**3.5.2.** Stainless Steel, 303 in accordance with ASTM A582, passivated per AMS2700 Type II.

**3.5.3.** Titanium, 6Al-4V in accordance with MIL-T-81556 or SAE-AMS-4911.

### 3.6. Encapsulant

Epoxy shall be used as a potting material to prevent contact removal. A suitable material shall be used to enable the connector to pass all required mechanical, environmental and electrical testing.

### 3.7. Pigtail Wire

Insulated wire shall be in accordance with SAE-AS22759/33, DLA drawing 04047 or NEMA HP3 for size 30 AWG. (NOTE: Connectors, which are pre-wired with SAE- AS22759/33 and stored in a sealed environment, could experience corrosion. Omnetics takes this into consideration when packaging and storing connectors using this wire.

## 4. MECHANICAL REQUIREMENTS

### 4.1. Contact Wipe

All contacts have a minimum contact wipe of .015 inch (0.38 mm) prior to the connector halves arriving at their fully mated position.

### 4.2. Durability

MIL-DTL-32139 requires a minimum of 200 mating cycles per test procedure EIA-364-09. Omnetics easily passes this requirement and has conducted and passed internal testing of over 2,000 mating cycles.

### 4.3. Contact Retention

Contacts will withstand a 2 lb. (0.9 kg) axial load for a min. of 5 seconds.

### 4.4. Crimp Tensile Strength

30 AWG wire will not break or pull from crimp joints with an applied force of less than 1.0 lb. (0.44 kg).

### 4.5. Contact Engaging and Separation Force

Maximum engagement force is 5.0 ounces (141.7 g.) and minimum separation force is 0.4 ounces (11.3 g.) (when using maximum and minimum ID test sleeves.)

### 4.6. Connector Mating/Unmating Force



## BI-LOBE<sup>®</sup> / NANO-D AND MIL-DTL-32139 SPECIFICATIONS

Maximum mating and unmating force will be less than or equal to 7 ounces (198.4 g.) times the number of contacts.

### 4.7. Solderability

Printed circuit tails intended for SMT and Thru-Hole soldering will meet the solderability requirements of MIL-STD-202, Method 208.

## 5. ELECTRICAL REQUIREMENTS

### 5.1. Current Capability

Contacts can carry 1.0 amp in continuous operation from -55° C to 125 ° C.

### 5.2. Dielectric Withstanding Voltage (sea Level)

Connectors will show no signs of breakdown or flash over at 250 VAC, rms 60 Hz, per the DWV test of EIA-364-20.

### 5.3. Dielectric Withstanding Voltage (70,000 Feet)

Connectors will show no signs of breakdown or flash over at 100 VAC, rms 60 Hz, per the DWV test of EIA-364-20.

### 5.4. Insulation Resistance

5,000 Megohms minimum @ 100 VDC per IAW EIA-364-21

### 5.5. Contact Resistance

71 mV drop maximum with a 1 ampere test current in accordance with EIA-364-06 using 30 AWG stranded wire.

### 5.6. Low Level Contact Resistance

71 milliohms with a test current of 10 milliamperes maximum in accordance with EIA-364-06.

### 5.7. Magnetic Permeability

The magnetic permeability will not exceed 2 mu when tested in accordance with EIA-364-54.

## 6. ENVIRONMENTAL REQUIREMENTS

### 6.1. Shock

100 g's when tested for mechanical shock, mated connectors shall not be damaged, and there shall be no loosening of parts. There shall be no interruptions in the circuit which lasts longer than 10 nanoseconds.

### 6.2. Vibration

20 g's when tested for vibration, mated connectors shall not be damaged, and there shall be no loosening of parts. There

shall be no interruptions in the circuit which lasts longer than 10 nanoseconds.

### 6.3. Salt Spray (Corrosion)

Mated connectors will show no exposure of base metal due to corrosion which will affect performance after be subjected to the salt spray test of EIA-364-26 condition B. Connectors must withstand 48 hours of salt spray. Following the test all connectors shall meet the specified requirements for low-signal level contact resistance and connector mating and unmating forces.

### 6.4. Thermal Vacuum Outgassing

These connector assemblies shall have a maximum total mass loss (TML) of 1.0 percent of the original specimen mass, and shall have a maximum volatile condensable material (VCM) content of 0.1 percent of the original specimen mass.

### 6.5. Fluid Immersion

Connectors will continue to adhere to the mating force requirements set forth by MIL-DTL-32139 after be subjected to a 20 hour immersion in synthetic lubricating oil, 2 hour immersion in Perchloroethylene cleaning solvent and 1 hour immersion in coolant fluid. There will be no degradation of the insulators or encapsulates.

### 6.6. Material Fungus Resistance

Materials used in the construction of these connectors are fungus inert in accordance with ASTM G21.

### 6.7. Thermal Shock

Connectors will withstand 5 cycles of thermal shock from -55° C to 125 ° C per EIA-364-32, condition I. There will be no detrimental damage or degradation of the electrical performance.

### 6.8. Humidity

These connectors will meet all the humidity testing requirements in accordance with EIA-364-31, test condition A (excluding steps 7a & 7b). Post humidity, the connectors will pass a 250 VAC DWV test. Within 1 hour the connectors will pass a 1 megohm insulation resistance test. Following 24 hours, the connectors will pass a 1,000 megohm insulation resistance test.

### 6.9. Marking Permanency

Any marking on the connector shells of these nano connectors shall meet the requirements of MIL-STD-202, Method 215.

## SINGLE ROW

Omnetics' pre-wired single-row Bi-Lobe® / Nano-D connectors offer designers maximum flexibility with an extensive range of size, material, hardware, and wire options. This small and powerful connector delivers excellent performance under rigorous conditions.

It can be ordered with full Qualified Products List (QPL) approval to provide the quality assurance, standards adherence, and ease of approvals needed for many high-reliability applications. Commercial off-the-shelf (COTS) non-QPL versions are also available with 18" of color-coded 30 AWG Teflon wire suitable for a wide variety of applications.

Omnetics' Pre-Wired Single-Row Bi-Lobe® / Nano-D connectors are available in standard sizes ranging from 5 through 51 positions.



### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	200 Mating Cycles min
Temperature	-55°C to +125 °C
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms min
Shock	100 g's discontinuity < 1 microsecond
Vibration	20 g's discontinuity < 1 microsecond
Thermal Vacuum Outgassing	1.0% max TML, 0.1% max VCM
Contact Resistance	71 mV drop @ 1 amp
Mating/Unmating Force	7 oz. (198 g) max per contact

### Material Specifications

TYPE	PERFORMANCE
Shell Material and Finish	Aluminum Shell, Electroless Nickel plated Aluminum Shell, Cadmium plated Titanium Shell Unplated Stainless Steel Shell, Passivated
Insulator	Liquid Crystal Polymer (LCP)
Pin	Gold Plated BeCu
Socket	Gold Plated Copper Alloy
Encapsulant	Epoxy

## SINGLE ROW QPL ORDERING GUIDE



<b>1</b> Component Assembly	<b>MBPS-01</b> Plug, Pin Contacts <b>MBSS-02</b> Receptacle, Socket Contacts
<b>2</b> Number Of Contacts	<b>A</b> 9 Contacts <b>B</b> 15 Contacts <b>C</b> 21 Contacts <b>D</b> 25 Contacts <b>E</b> 31 Contacts <b>F</b> 37 Contacts <b>G</b> 51 Contacts
<b>3</b> Wire Type	See M32139 Wire Type Table Below
<b>4</b> Hardware	<b>S</b> Jackscrew M32139-01 Plug Only <b>T</b> Threaded Hole M32139-02 Receptacle Only
<b>5</b> Shell Material And Finish	<b>C</b> Aluminum, Cadmium Finish <b>N</b> Aluminum, Electroless Nickel Finish <b>S</b> Stainless Steel, Passivated Finish <b>T</b> Titanium (Unplated)
<b>6</b> Space Class	<b>Leave Blank</b> For Non-Space Applications <b>S</b> Space Grade

### M32139 Wire Type


Wire Type	Specification	Color	Length Inches [mm]
01	NEMA HP-3-ETXBBB	White	6 [152]
02			18 [457]
03			36 [914]
04		10 Color Repeat	6 [152]
05			18 [457]
06			36 [914]
07	M22759/33-30	White	6 [152]
08			18 [457]
09			36 [914]
10		10 Color Repeat	6 [152]
11			18 [457]
12			36 [914]
13	04047-30A	White	6 [152]
14			18 [457]
15			36 [914]
16		10 Color Repeat	6 [152]
17			18 [457]
18			36 [914]

## DUAL ROW

Omnetics' pre-wired dual-row Bi-Lobe® / Nano-D connectors are available in an extensive range of size, material, hardware, and wire options. This small and powerful connector delivers exceptional connectivity in critical applications.

These connectors can be ordered with full Qualified Products List (QPL) approval to provide the quality assurance, standards adherence, and ease of approvals needed for many high-reliability applications. Commercial off-the-shelf (COTS) non-QPL versions are also available with 18" of color-coded 30 AWG Teflon wire suitable for a wide variety of applications.

Omnetics' pre-wired single-row Bi-Lobe® / Nano-D connectors are available in standard sizes ranging from 9 through 85 positions.

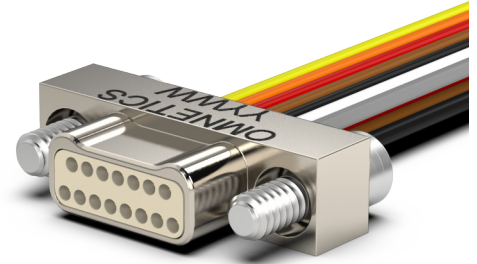

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	200 Mating Cycles min
Temperature	-55°C to +125 °C
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms min
Shock	100 g's discontinuity < 1 microsecond
Vibration	20 g's discontinuity < 1 microsecond
Thermal Vacuum Outgassing	1.0% max TML, 0.1% max VCM
Contact Resistance	71 mV drop @ 1 amp
Mating/Unmating Force	7 oz. (198 g) max per contact

### Material Specifications

TYPE	PERFORMANCE
Shell Material and Finish	Aluminum Shell, Electroless Nickel plated Aluminum Shell, Cadmium plated Titanium Shell Unplated Stainless Steel Shell, Passivated
Insulator	Liquid Crystal Polymer (LCP)
Pin	Gold Plated BeCu
Socket	Gold Plated Copper Alloy
Encapsulant	Epoxy

## DUAL ROW QPL ORDERING GUIDE



<b>1 Component Assembly</b>	<b>MNPO-03</b> Plug, Pin Contacts <b>MNSO-04</b> Receptacle, Socket Contacts
<b>2 Number Of Contacts</b>	<b>A</b> 9 Contacts <b>B</b> 15 Contacts <b>C</b> 21 Contacts <b>D</b> 25 Contacts <b>E</b> 31 Contacts <b>F</b> 37 Contacts <b>G</b> 51 Contacts
<b>3 Wire Type</b>	See M32139 Wire Type Table Below
<b>4 Hardware</b>	<b>S</b> Jackscrew M32139-01 Plug Only <b>T</b> Threaded Hole M32139-02 Receptacle Only
<b>5 Shell Material And Finish</b>	<b>C</b> Aluminum, Cadmium Finish <b>N</b> Aluminum, Electroless Nickel Finish <b>S</b> Stainless Steel, Passivated Finish <b>T</b> Titanium (Unplated)
<b>6 Space Class</b>	<b>Leave Blank</b> For Non-Space Applications <b>S</b> Space Grade

### M32139 Wire Type

Wire Type	Specification	Color	Length Inches [mm]
01	NEMA HP-3-ETXBBB	White	6 [152]
02			18 [457]
03			36 [914]
04		10 Color Repeat	6 [152]
05			18 [457]
06			36 [914]
07	M22759/33-30	White	6 [152]
08			18 [457]
09			36 [914]
10		10 Color Repeat	6 [152]
11			18 [457]
12			36 [914]
13	04047-30A	White	6 [152]
14			18 [457]
15			36 [914]
16		10 Color Repeat	6 [152]
17			18 [457]
18			36 [914]

## DUAL ROW HORIZONTAL SMT (TYPE AA)

**Horizontal SMT Bi-Lobe®** extremely low-profile connectors are well-suited for pick and place mounting methods. SMT Bi-Lobe® nano connectors feature Omnetics' highly reliable gold-plated Flex Pin contact system. In addition to ease of assembly, their lightweight construction helps meet size and weight goals. They are rugged and deliver high performance under shock, vibration, temperature extremes, and other rigorous conditions common to critical applications. Omnetics' SMT Bi-Lobe® nano connectors are available in a range of options, including mounting holes suitable for PCB and flex mounting. They are available in standard sizes ranging from 9 through 91 positions, as well as custom configurations.



### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact





### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW HORIZONTAL SMT (TYPE AA)

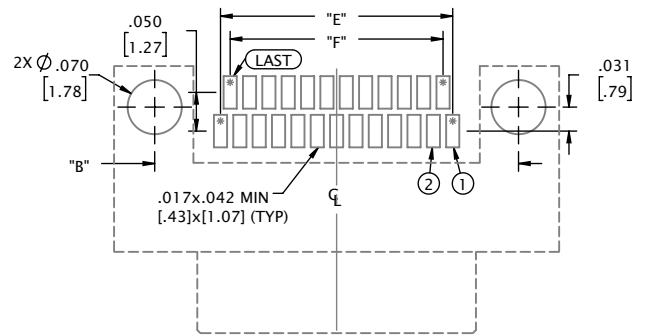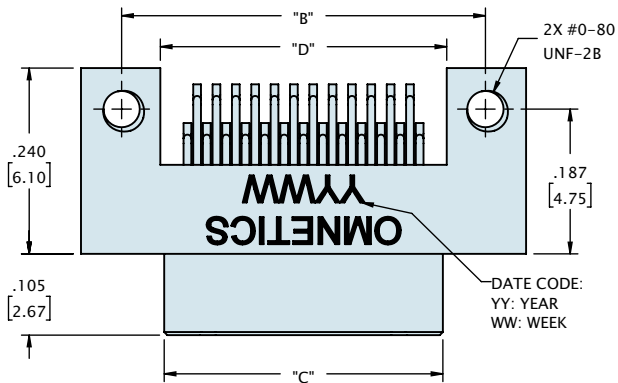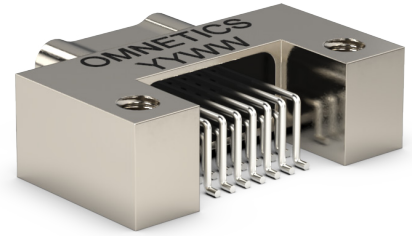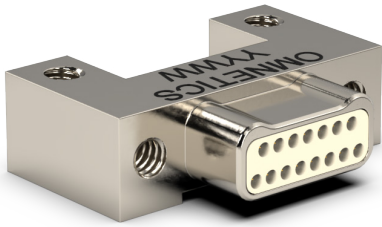




**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

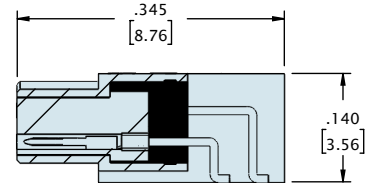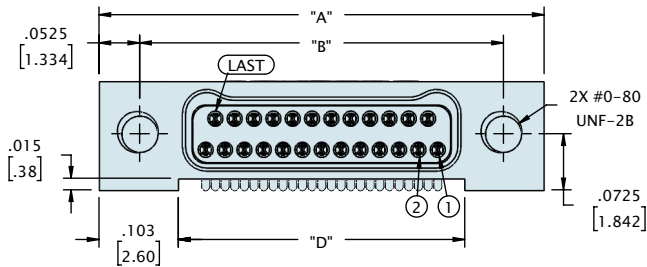



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.170 [4.32]	.100 [2.54]	.075 [1.90]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.245 [6.22]	.175 [4.44]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.320 [8.13]	.250 [6.35]	.225 [5.71]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.370 [9.40]	.300 [7.62]	.275 [6.98]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.375 [9.52]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.520 [13.21]	.450 [11.43]	.425 [10.79]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.625 [15.87]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.870 [22.10]	.800 [20.32]	.775 [19.68]
69	1.125 [28.58]	1.020 [25.91]	.910 [23.11]	.920 [23.37]	.850 [21.59]	.825 [20.95]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.120 [28.45]	1.050 [26.67]	1.025 [26.03]
91	1.452 [36.88]	1.321 [33.55]	1.185 [30.10]	1.195 [30.35]	1.125 [28.57]	1.100 [27.94]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW HORIZONTAL SMT (TYPE AA)

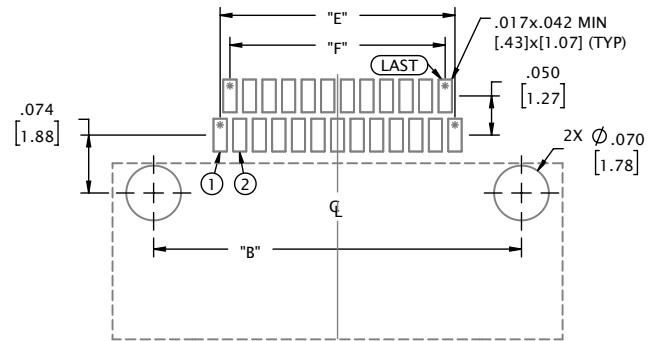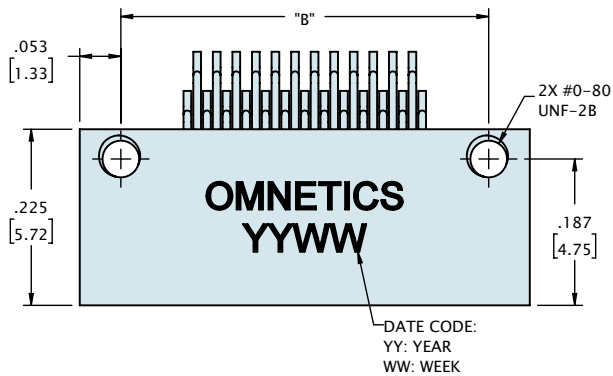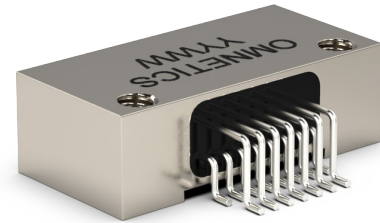

SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

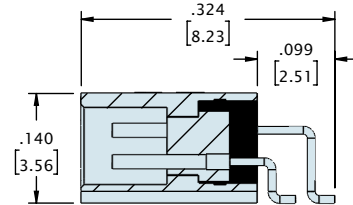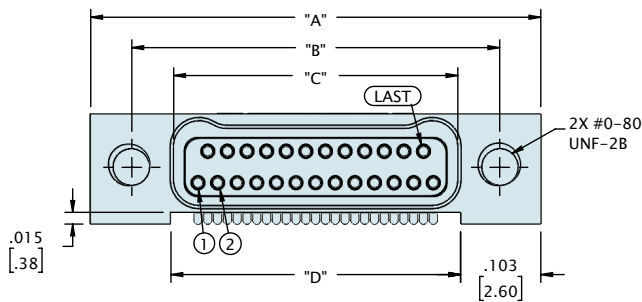


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.175 [4.45]	.150 [3.81]
69	1.125 [28.58]	1.020 [25.91]	.913 [23.19]	.920 [23.37]	.850 [21.59]	.825 [20.96]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]
91	1.452 [36.88]	1.321 [33.55]	1.188 [30.18]	1.195 [30.35]	1.125 [28.58]	1.100 [27.94]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY




## ORDERING GUIDE

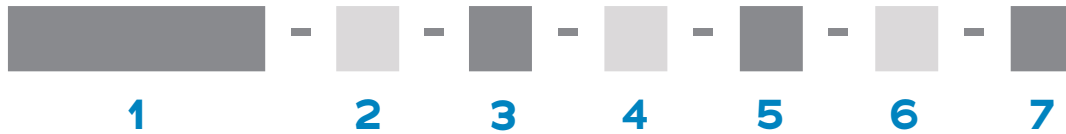

<b>1 Series</b>	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset
<b>2 Number Of Contacts</b>	<b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b> <b>65</b> <b>69</b> <b>85</b> <b>91</b>	
<b>3 Termination Type</b>	<b>AA</b> Horizontal Surface Mount	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminium Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## DUAL ROW VERTICAL SMT (TYPE VV)

As electronic devices scale down, Omnetics is ready with ever-smaller connectors designed to offer exceptional performance in reduced package sizes. Our **Vertical SMT Bi-Lobe®** nano connectors require minimal board space on flex circuits and printed circuit boards. These connectors feature Omnetics' highly reliable Flex Pin contact system and are available with threaded mounting holes and retention screws. Omnetics' Vertical SMT Type VV Bi-Lobe® nano connectors are available in a wide range of configurations to meet the needs of a variety of critical applications. These connectors are available in standard sizes ranging from 9 through 91 positions, as well as custom configurations.

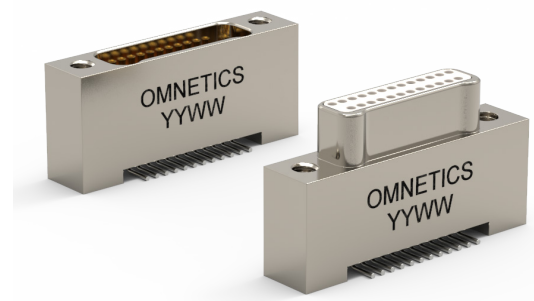

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact




### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW VERTICAL SMT (TYPE VV)

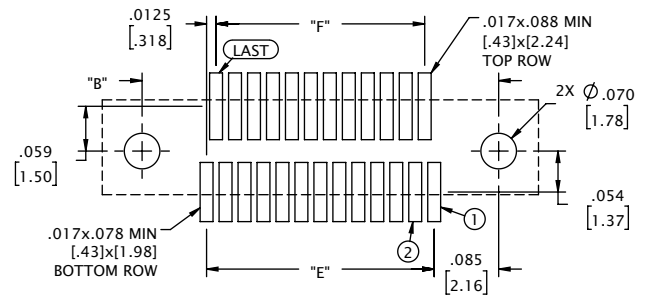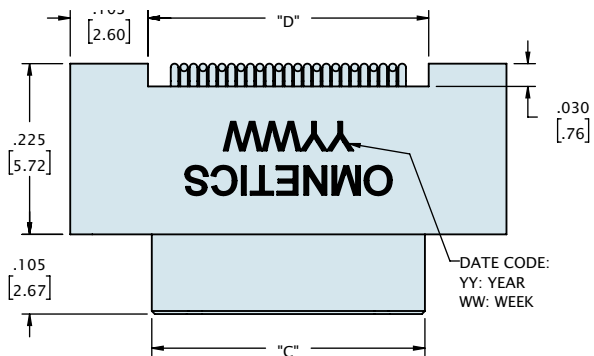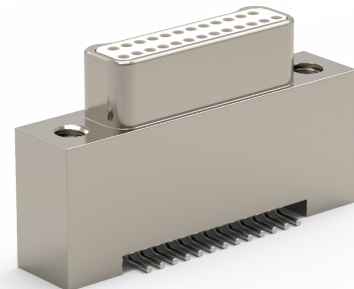





**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

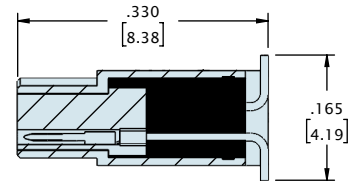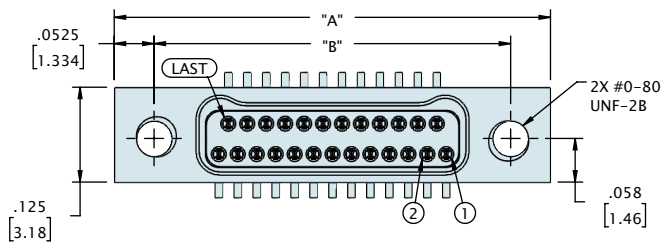



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.370 [9.40]	.218 [5.54]	.193 [4.90]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.870 [22.10]	.800 [20.32]	.775 [19.69]
69	1.125 [28.58]	1.020 [25.91]	.910 [23.11]	.920 [23.37]	.850 [21.59]	.825 [20.96]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]
91	1.452 [36.88]	1.321 [33.55]	1.185 [30.10]	1.195 [30.35]	1.125 [28.58]	1.100 [27.94]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW VERTICAL SMT (TYPE VV)

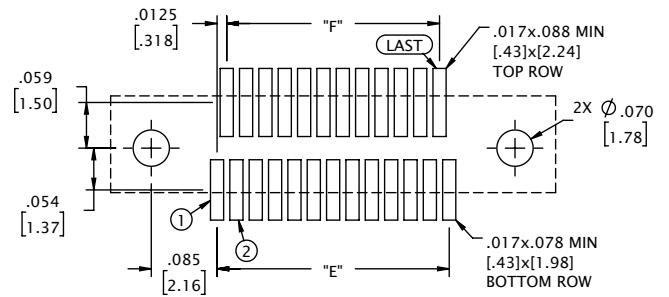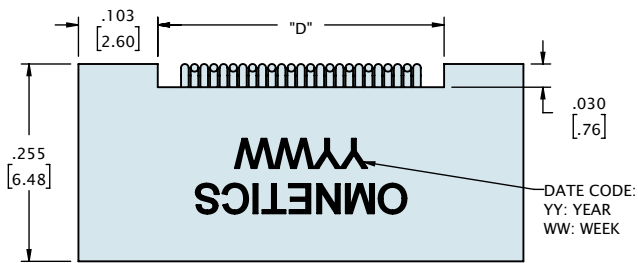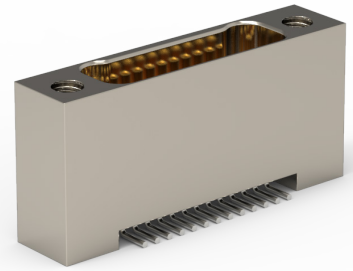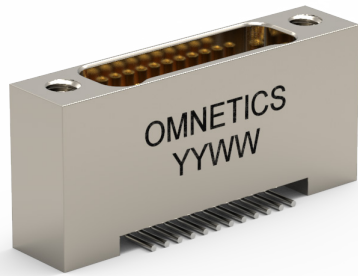


SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

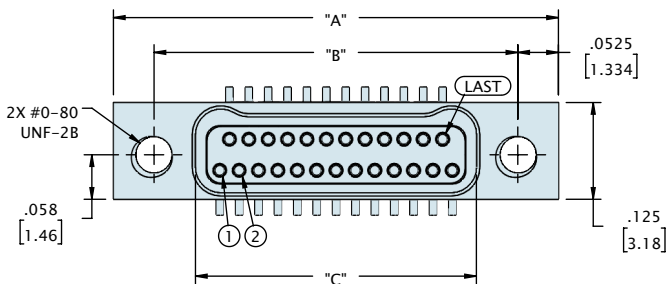

CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]
69	1.125 [28.58]	1.020 [25.91]	.913 [23.19]	.920 [23.37]	.850 [21.59]	.825 [20.96]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]
91	1.452 [36.88]	1.321 [33.55]	1.188 [30.18]	1.195 [30.35]	1.125 [28.58]	1.100 [27.94]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


## ORDERING GUIDE

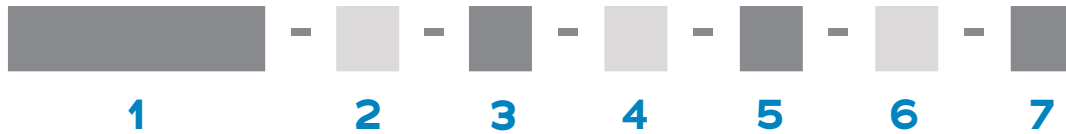

<b>1 Series</b>	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset
<b>2 Number Of Contacts</b>	<b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b> <b>65</b> <b>69</b> <b>85</b> <b>91</b>	
<b>3 Termination Type</b>	<b>VV</b> Vertical Surface Mount	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminium Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	<b>EJS</b> End Jack Screw <b>RH</b> RoHS Compliant
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## DUAL ROW STRAIGHT TAIL (TYPE DD)

The Dual Row Bi-Lobe<sup>®</sup> nanos are tiny and powerful, with ruggedized features that make them suitable for high-reliability applications in medical, military, and other rigorous environments. They feature straight tails (integral or crimped) for vertical thru-hole mounting to fine pitch flex circuits. Straight solid tails are commonly used in ultra-fine wire wrap terminations, such as in electrophysiology applications. The connectors are designed on .025" (.64 mm) centerlines and feature Omnetics' gold-plated Flex Pin contact system. They are available with retention screws for a positive lock and come in standard sizes ranging from 9 to 85 positions. Custom configurations are also available.

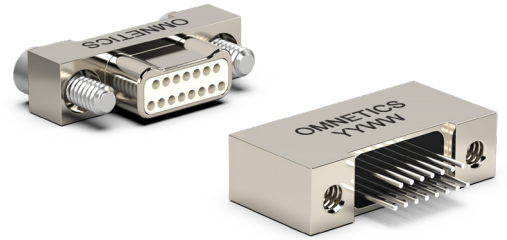

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact





### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW STRAIGHT TAIL (TYPE DD)

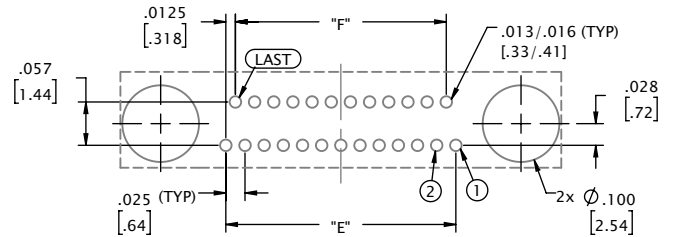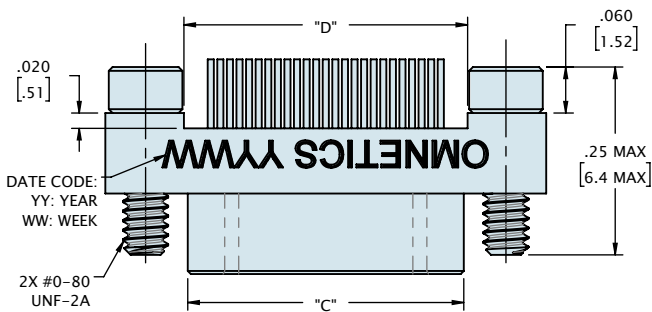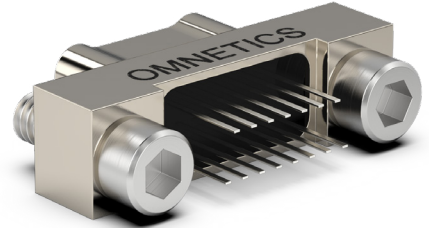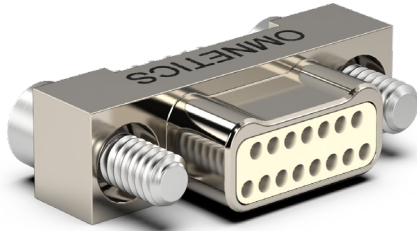

**SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)**


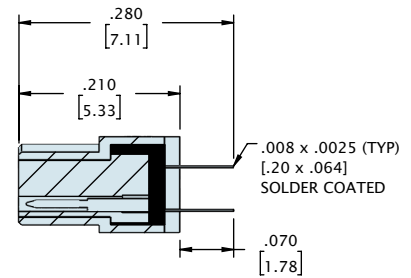
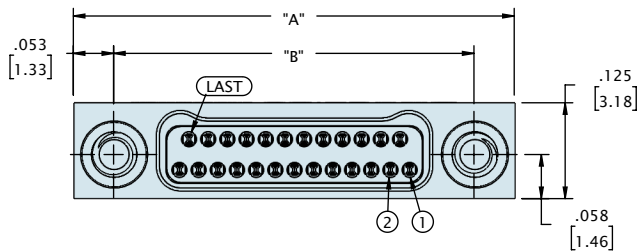


JACKSCREW NOT SHOWN FOR CLARITY



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.870 [22.10]	.800 [20.32]	.775 [19.69]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW STRAIGHT TAIL (TYPE DD)

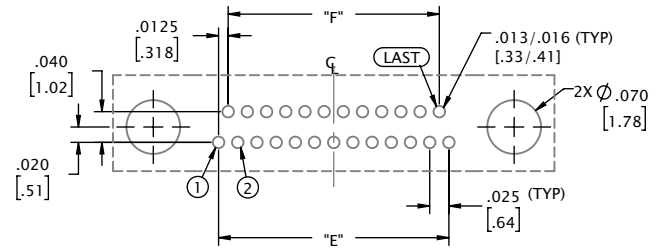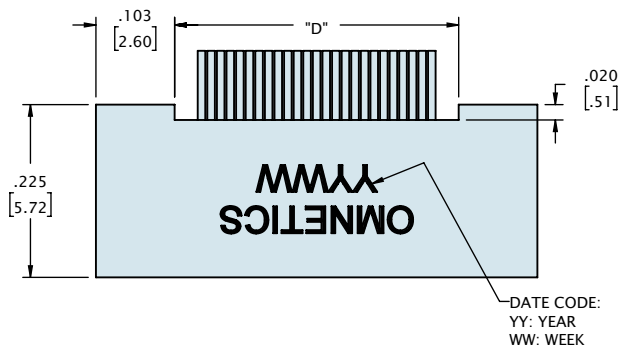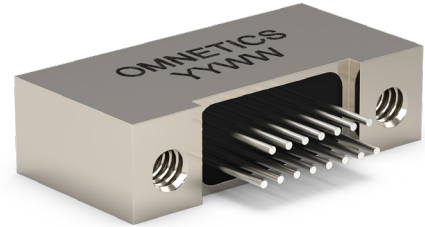

SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

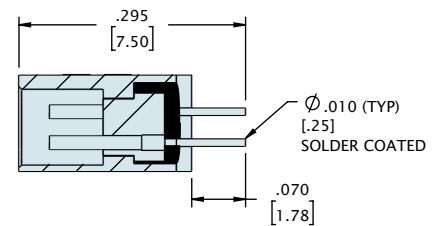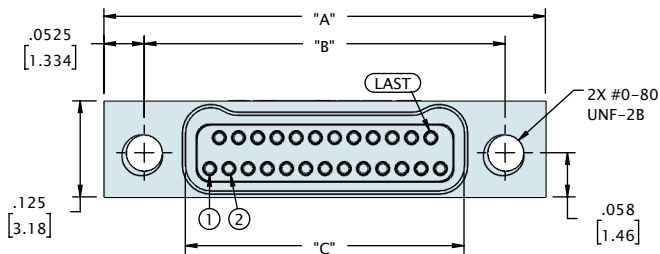


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY



## ORDERING GUIDE

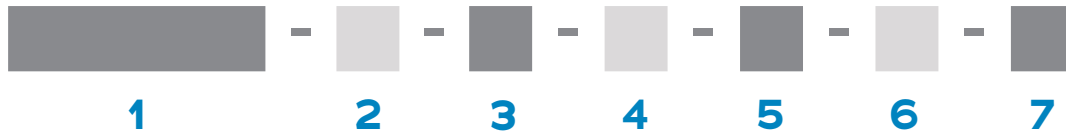

<b>1</b> Series	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset
<b>2</b> Number Of Contacts	<b>O9</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b> <b>65</b> <b>85</b>	
<b>3</b> Termination Type	<b>DD</b> Thru-Hole Straight	
<b>4</b> Shell Material & Finish	<b>N</b> Aluminium Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>5</b> Common Options	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6</b> Mod Codes	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options	

# DUAL ROW HORIZONTAL THRU-HOLE (TYPE H4)

The Dual Row Bi-Lobe<sup>®</sup> H4 nanos are suitable for high-reliability miniature applications that must deliver exceptional performance in medical, military, and other demanding environments. They are a thru-hole mounted, low-mass ruggedized connector on .025" (.64) centerlines. The thru-hole tails are spread onto a mounting pattern on .050 (1.27 mm) with space for annular rings and routing traces. They feature Omnetics' gold-plated Flex Pin contact system. These durable, lightweight connectors provide power and signal under rigorous conditions and intermate with Omnetics QPL versions of MIL-DTL-32139. They are available with retention screws for a positive lock and come in standard sizes ranging from 9 to 65 positions. Custom configurations are also available.



## Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact






## Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

## Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700






# DUAL ROW HORIZONTAL THRU-HOLE (TYPE H4)

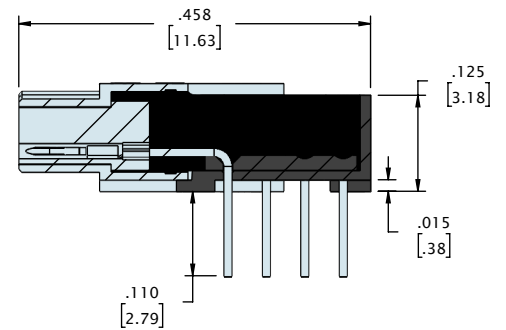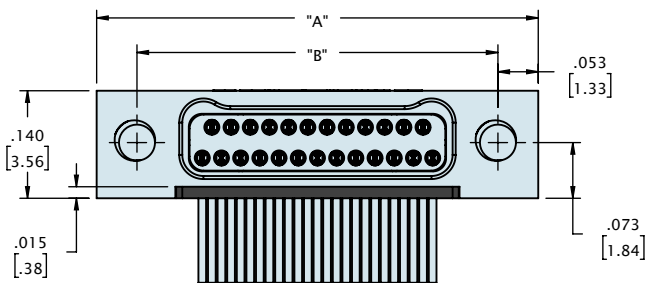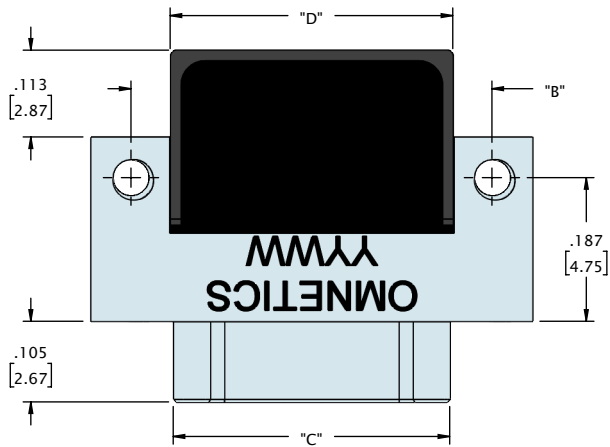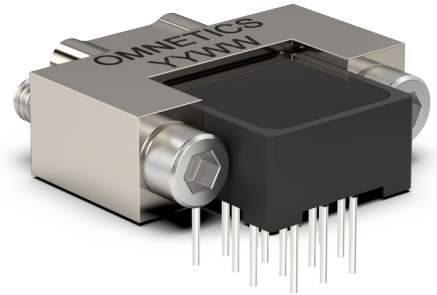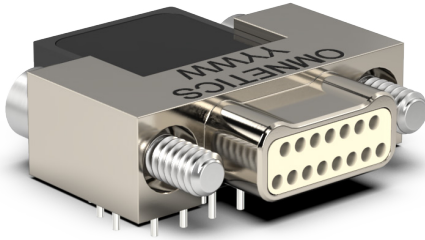

CONTACTS	"A"	"B"	"C"	"D"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.168 [4.27]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.243 [6.17]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.318 [8.08]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.368 [9.35]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.443 [11.25]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.518 [13.16]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.693 [17.60]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.868 [22.05]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.118 [28.40]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW HORIZONTAL THRU-HOLE (TYPE H4)

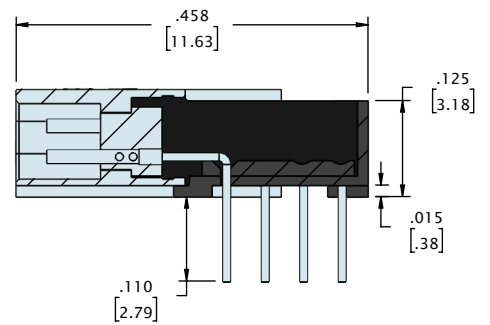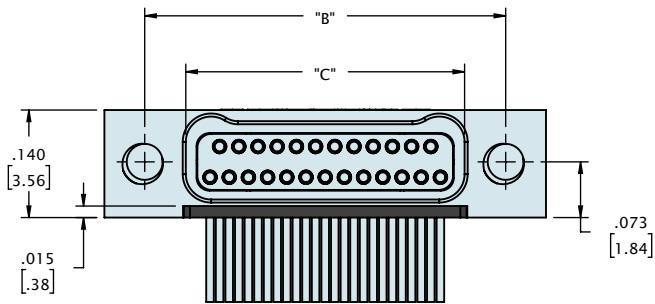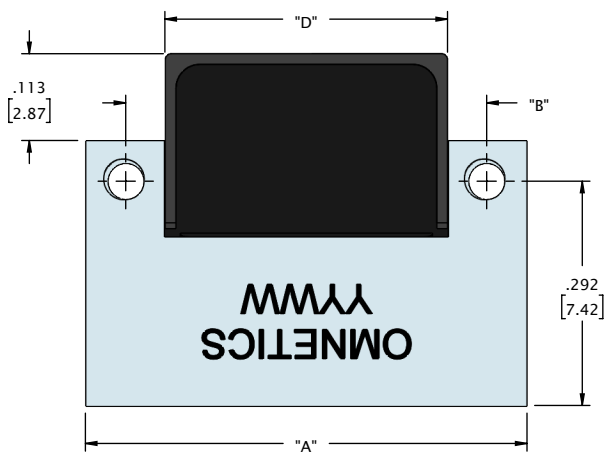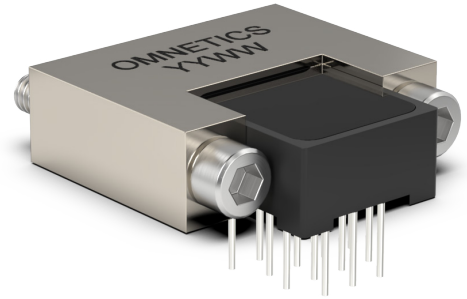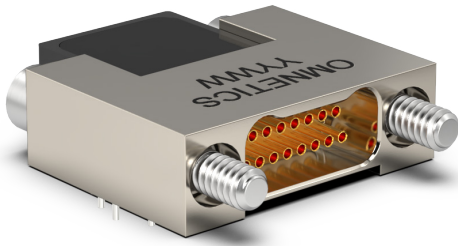


CONTACTS	"A"	"B"	"C"	"D"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.168 [4.27]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.243 [6.17]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.318 [8.08]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.368 [9.35]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.443 [11.25]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.518 [13.16]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.693 [17.60]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.868 [22.05]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.118 [28.40]


DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW HORIZONTAL THRU-HOLE (TYPE H4)


9 CONTACT PLUG

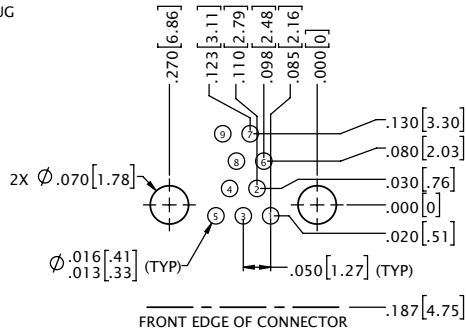


15 CONTACT PLUG

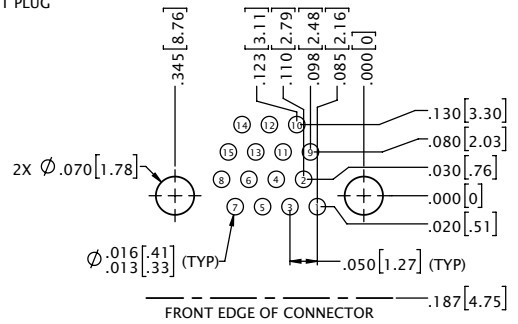


21 CONTACT PLUG

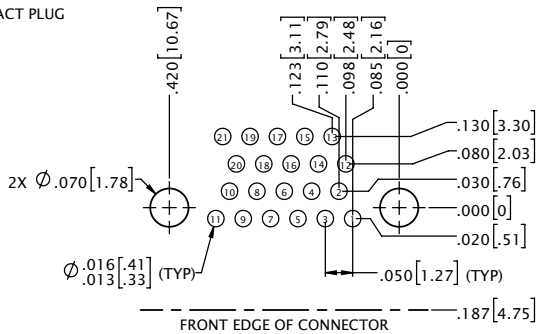


25 CONTACT PLUG

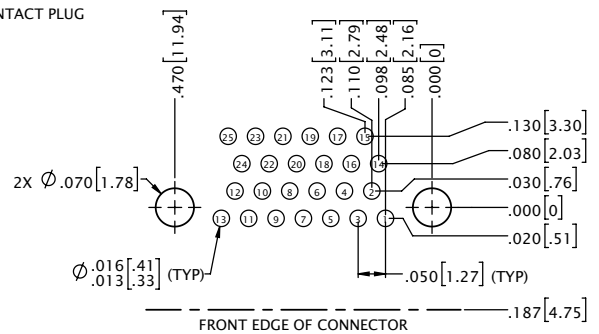


31 CONTACT PLUG

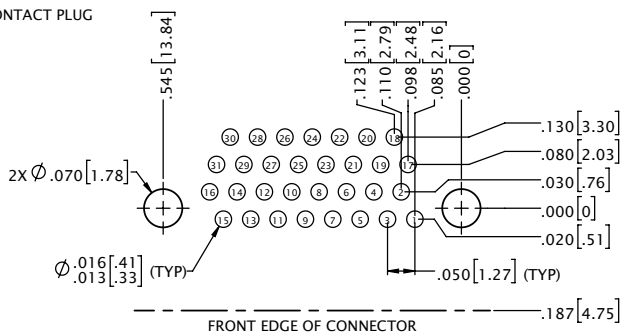


37 CONTACT PLUG

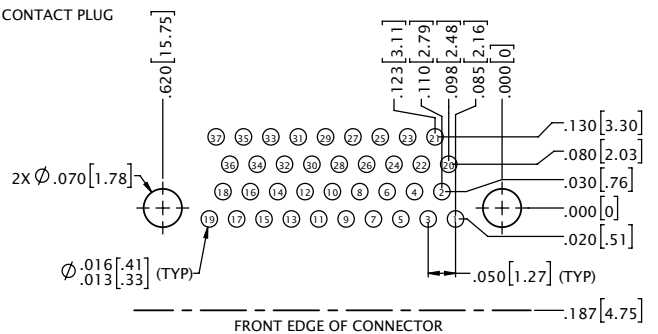

51 CONTACT PLUG

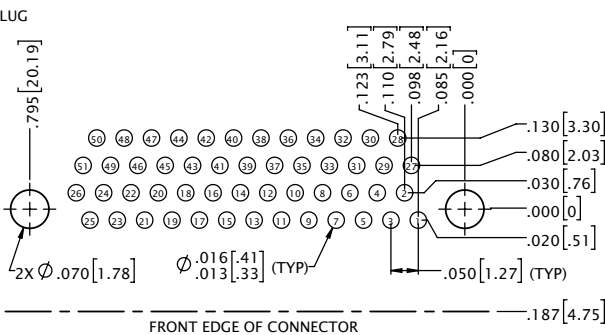


65 CONTACT PLUG

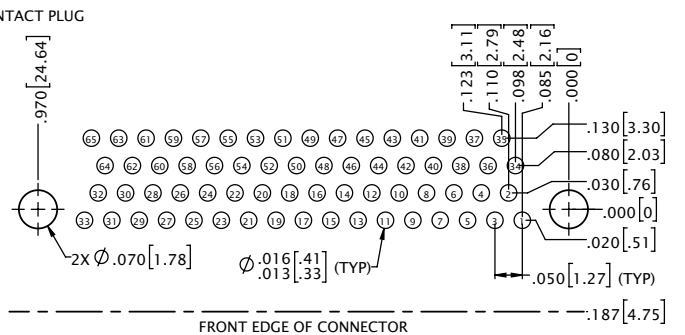


# DUAL ROW HORIZONTAL THRU-HOLE (TYPE H4)

9 CONTACT SOCKET

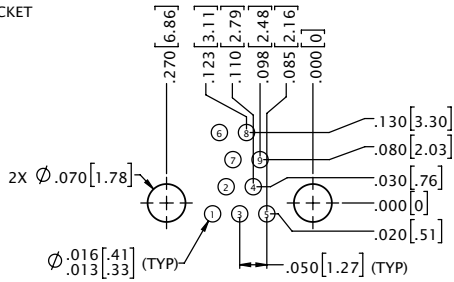


FRONT EDGE OF CONNECTOR .292 [7.42]

15 CONTACT SOCKET

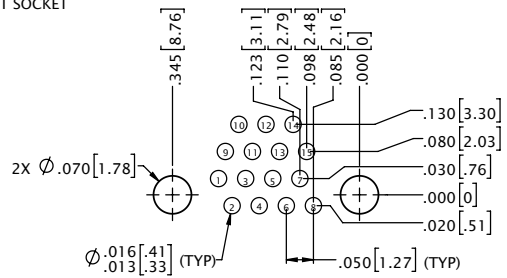


FRONT EDGE OF CONNECTOR .292 [7.42]

21 CONTACT SOCKET

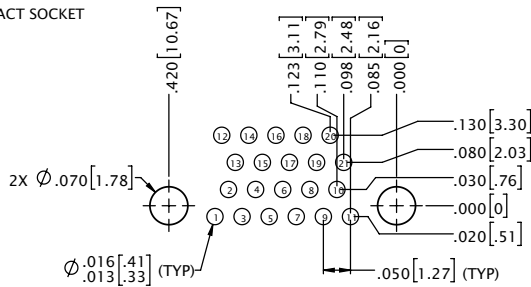


FRONT EDGE OF CONNECTOR .292 [7.42]

25 CONTACT SOCKET

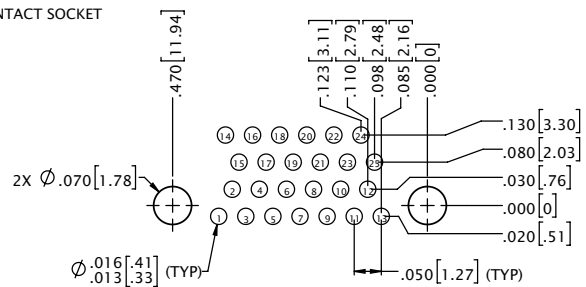


FRONT EDGE OF CONNECTOR .292 [7.42]

31 CONTACT SOCKET

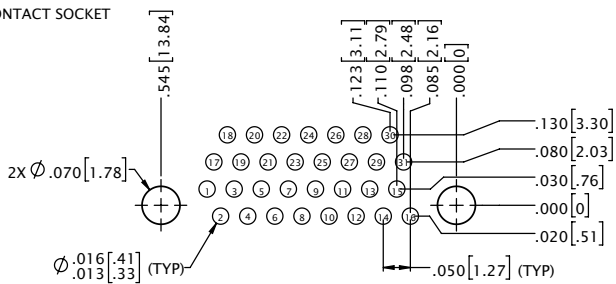


FRONT EDGE OF CONNECTOR .292 [7.42]

37 CONTACT SOCKET

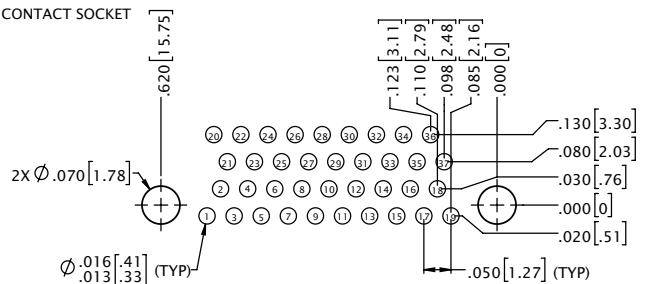


FRONT EDGE OF CONNECTOR .292 [7.42]

51 CONTACT SOCKET

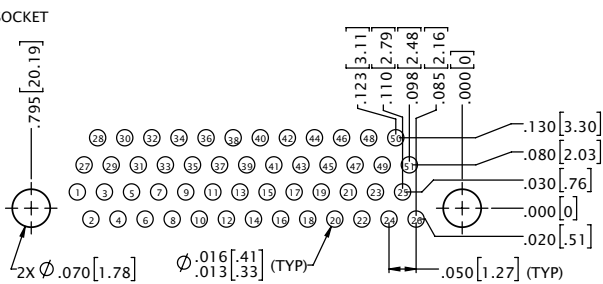

FRONT EDGE OF CONNECTOR .292 [7.42]

65 CONTACT SOCKET

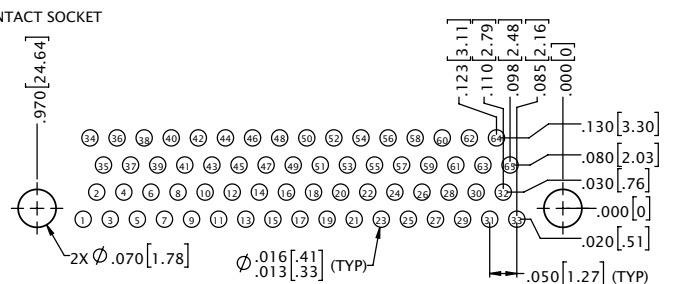

FRONT EDGE OF CONNECTOR .292 [7.42]


## ORDERING GUIDE



<b>1 Series</b>	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset							
<b>2 Number Of Contacts</b>	<b>O9</b>	<b>15</b>	<b>21</b>	<b>25</b>	<b>31</b>	<b>37</b>	<b>51</b>	<b>65</b>	<b>85</b>
<b>3 Termination Type</b>	<b>H4</b> Horizontal Thru-Hole								
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated			<b>CD</b> Aluminium shell, Cadmium Plated					
	<b>B</b> Aluminium Shell, Black Anodized			<b>S</b> Stainless Steel Shell, Passivated					
	<b>T</b> Titanium Shell, Unplated								
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80			<b>EJS</b> End Jack Screw					
	<b>NTH</b> Non-Threaded Holes For Mounting To The Board								
	<b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw)								
	<b>HT</b> High Temp. Epoxy			<b>RH</b> RoHS Compliant					
	<b>CS</b> Customer Supplied Material								
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying			<b>M50</b> Space Grade Nano-D, SPT1					
	<b>M53</b> Space Grade Nano-D, SPT2								
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options								

# DUAL ROW VERTICAL THRU-HOLE (TYPE V4)

Applications that experience frequent high vibration and shock are served well by Omnetics' **Dual Row Bi-Lobe® V4** nanos. This low-mass vertical thru-hole mounted connector has contacts arranged on .025" (.64 mm) centerlines. The thru-hole tails are spread onto a mounting pattern on .050 (1.27 mm) with space for annular rings and routing traces. They feature Omnetics' gold-plated Flex Pin contact system. These durable, lightweight connectors serve the most demanding applications and intermate with Omnetics QPL versions of MIL-DTL-32139. They are available with retention screws for a positive lock and come in standard sizes ranging from 9 to 65 positions. Custom configurations are also available.

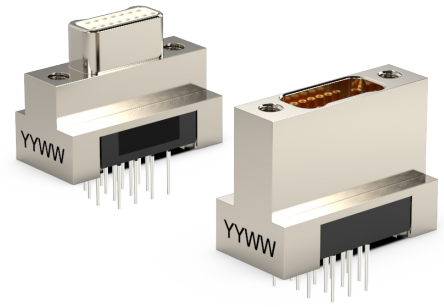

## Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact

## Material Specifications






TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

## Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700








# DUAL ROW VERTICAL THRU-HOLE (TYPE V4)

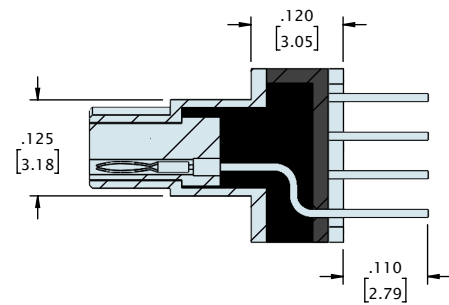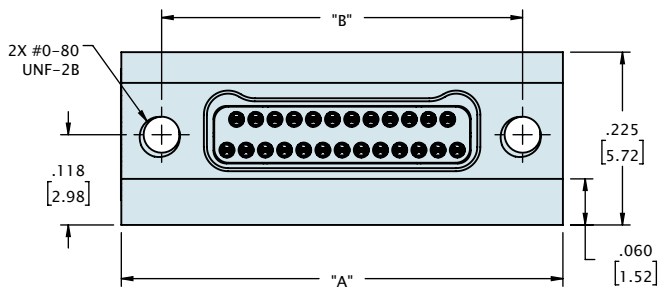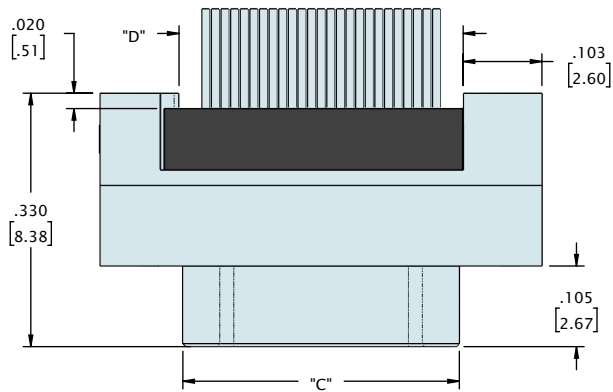

CONTACTS	"A"	"B"	"C"	"D"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.170 [4.32]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.245 [6.22]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.320 [8.13]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.370 [9.40]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.520 [13.21]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.870 [22.10]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.120 [28.45]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW VERTICAL THRU-HOLE (TYPE V4)

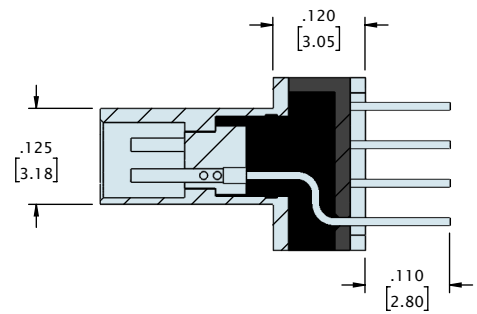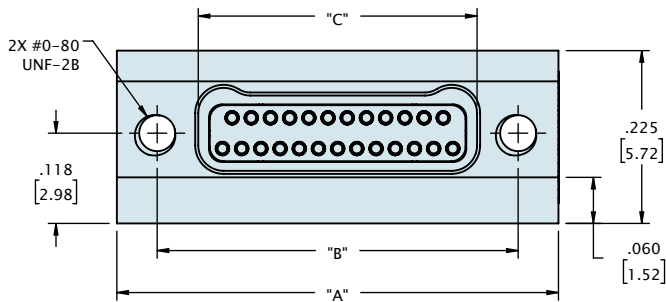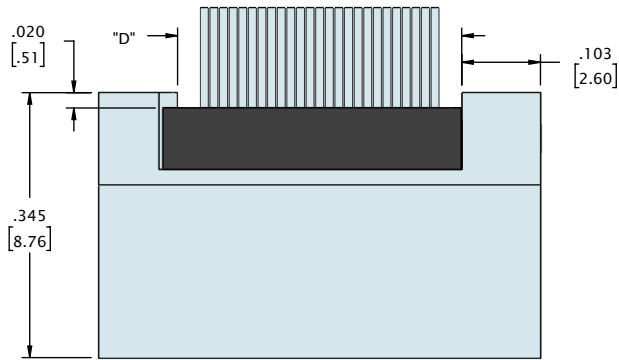


CONTACTS	"A"	"B"	"C"	"D"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.120 [28.45]


DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW VERTICAL THRU-HOLE (TYPE V4)


9 CONTACT PLUG

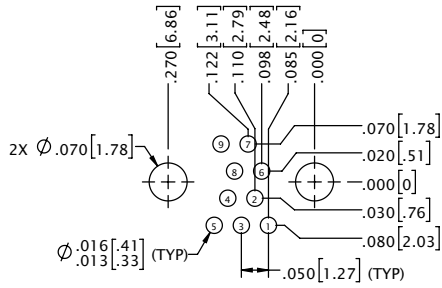


15 CONTACT PLUG

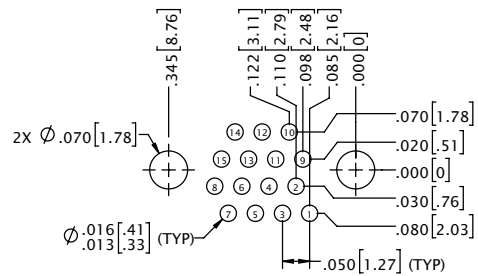


21 CONTACT PLUG

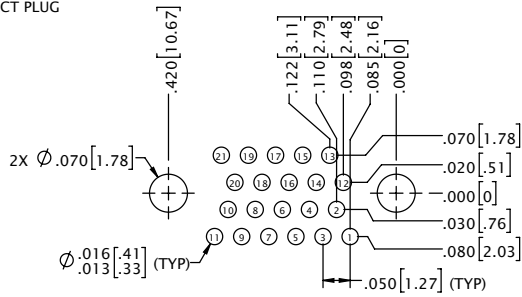


25 CONTACT PLUG

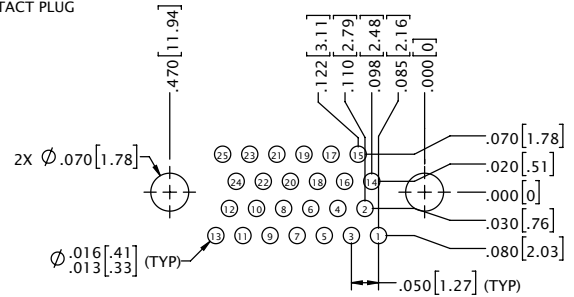


31 CONTACT PLUG

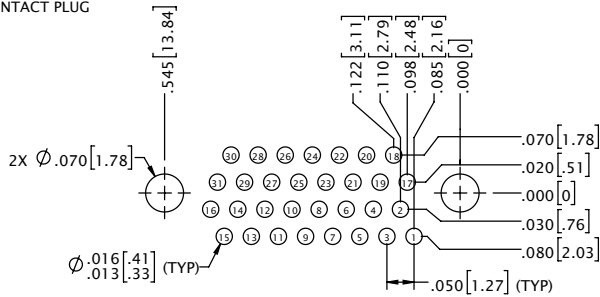


37 CONTACT PLUG

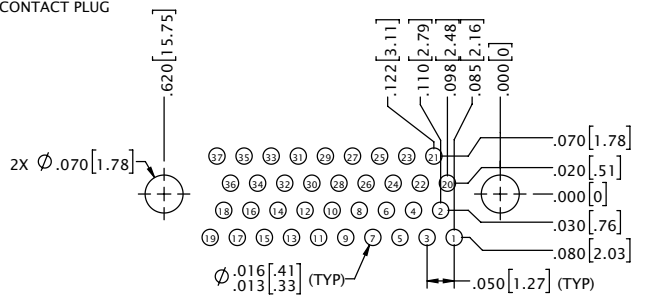


51 CONTACT PLUG

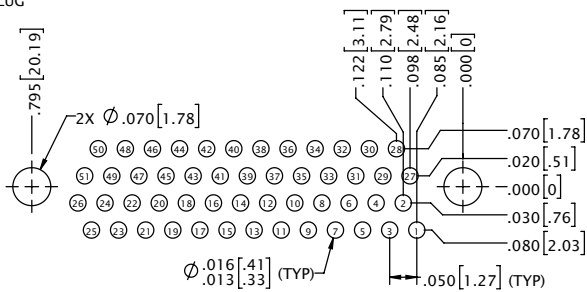

65 CONTACT PLUG

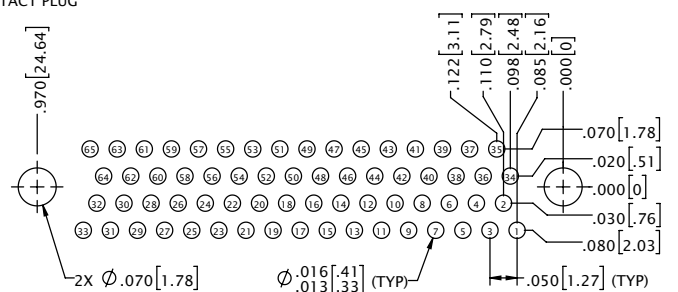


85 CONTACT PLUG

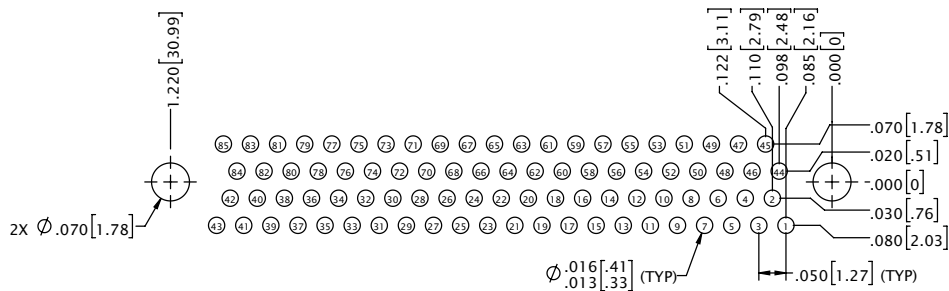


# DUAL ROW VERTICAL THRU-HOLE (TYPE V4)


9 CONTACT SOCKET

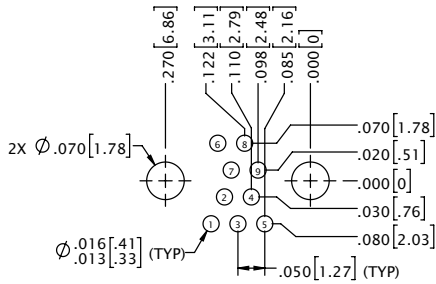


15 CONTACT SOCKET

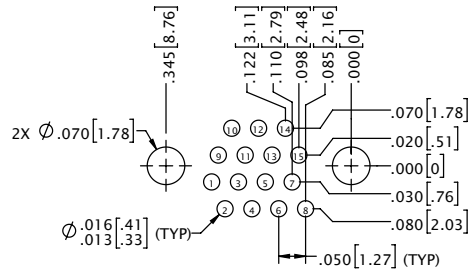


21 CONTACT SOCKET

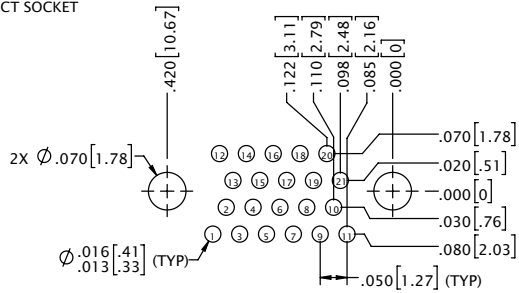


25 CONTACT SOCKET

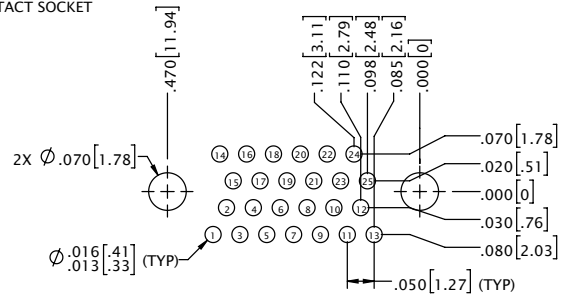


31 CONTACT SOCKET

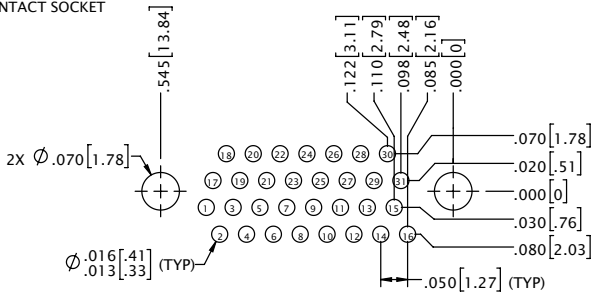


37 CONTACT SOCKET

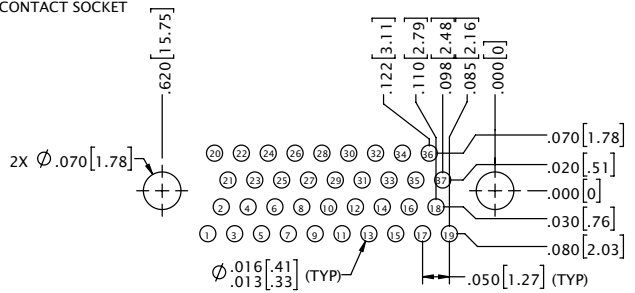


51 CONTACT SOCKET

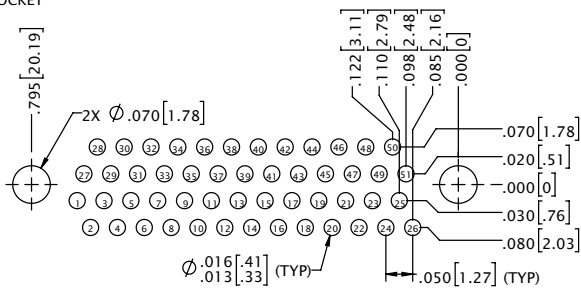


65 CONTACT SOCKET

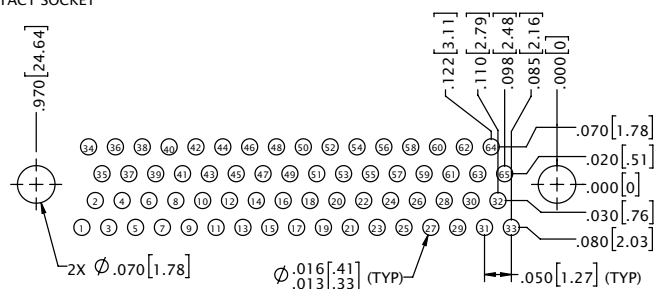

85 CONTACT SOCKET

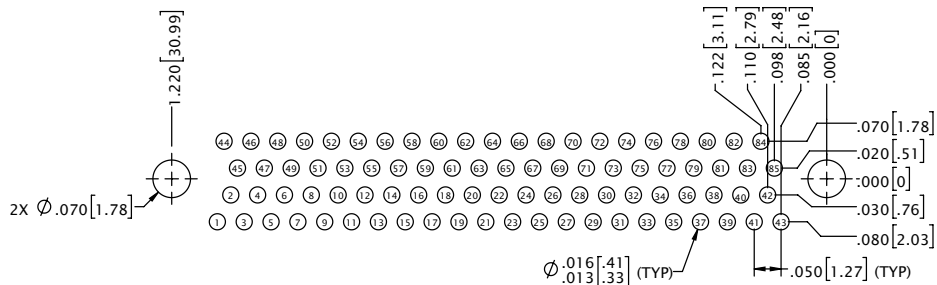


## ORDERING GUIDE

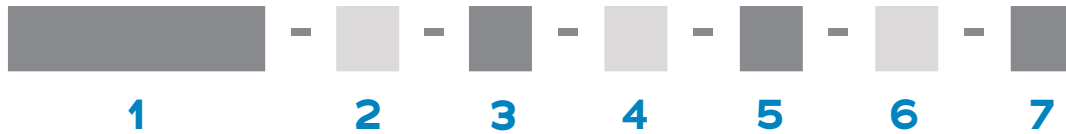

<b>1 Series</b>	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset
<b>2 Number Of Contacts</b>	<b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b> <b>65</b> <b>85</b>	
<b>3 Termination Type</b>	<b>V4</b> Vertical Thru-Hole	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

# DUAL ROW FLEX TAIL (TYPE FF)

**Flex Tail Bi-Lobe<sup>®</sup>** nanos protect connectivity in critical applications with a low-profile, ruggedized design that serves well in high-reliability environments. The contacts are arranged on .025" (.64 mm) centerlines and the SMT tails are formed in an hourglass shape that allows a double-sided flex circuit to slide between the two rows. Spring tension holds the flex in place during the soldering process. They feature Omnetics' gold-plated Flex Pin contact system. These durable, lightweight connectors serve the most demanding applications and intermate with Omnetics QPL versions of MIL-DTL-32139. They are available with retention screws for a positive lock and come in standard sizes ranging from 9 to 85 positions. Custom configurations are also available.

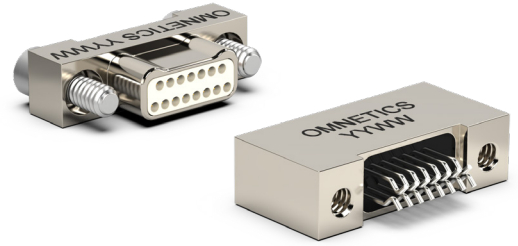

## Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact







## Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

## Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW FLEX TAIL (TYPE FF)

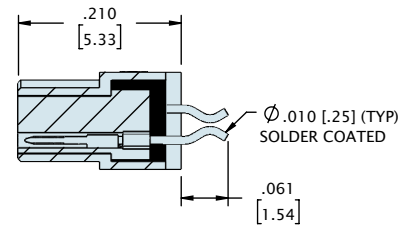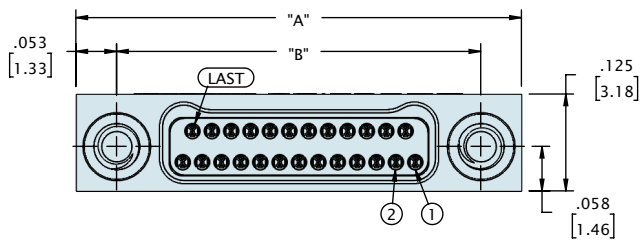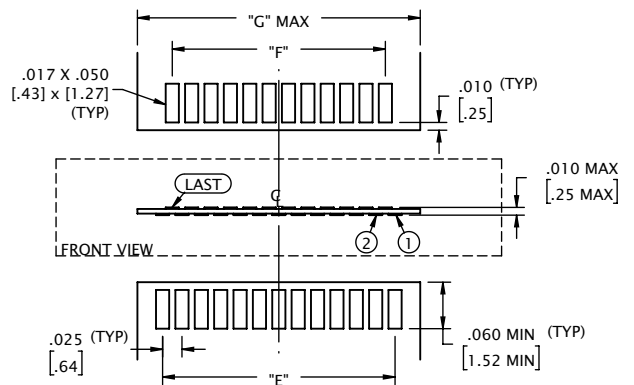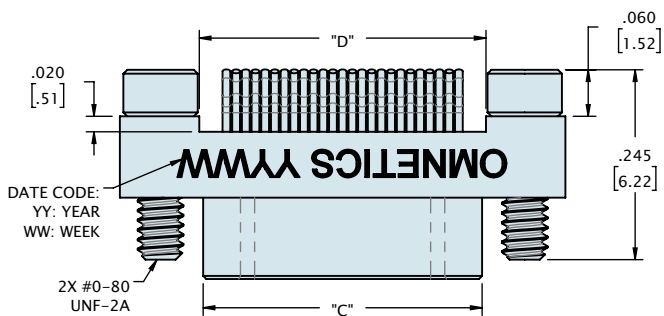
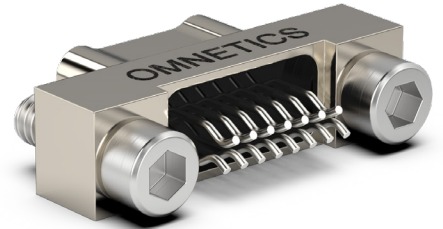
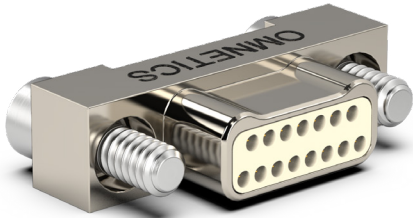


JACKSCREW NOT SHOWN FOR CLARITY



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"	"G"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.170 [4.32]	.100 [2.54]	.075 [1.90]	.165 [4.19]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.245 [6.22]	.175 [4.45]	.150 [3.81]	.240 [6.10]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.320 [8.13]	.250 [6.35]	.225 [5.71]	.315 [8.00]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.370 [9.40]	.300 [7.62]	.275 [6.98]	.365 [9.27]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.375 [9.52]	.350 [8.89]	.440 [11.18]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.520 [13.21]	.450 [11.43]	.425 [10.79]	.515 [13.08]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.625 [15.87]	.600 [15.24]	.690 [17.53]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.870 [22.10]	.800 [20.32]	.775 [19.68]	.865 [21.97]
69	1.125 [28.58]	1.020 [25.91]	.910 [23.11]	.920 [23.37]	.850 [21.59]	.825 [20.96]	.915 [23.24]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.120 [28.45]	1.050 [26.67]	1.025 [26.03]	1.115 [28.32]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW FLEX TAIL (TYPE FF)

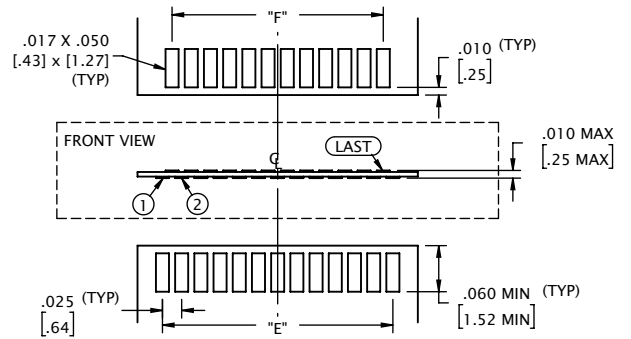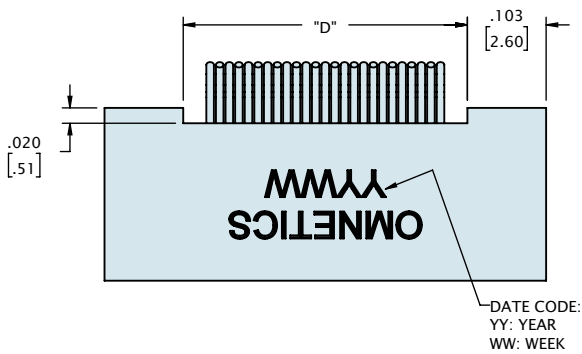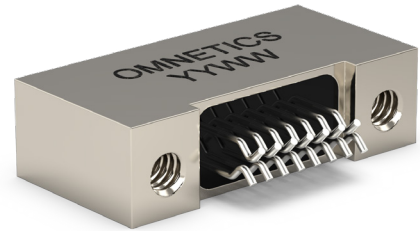

SUGGESTED PAD LAYOUT

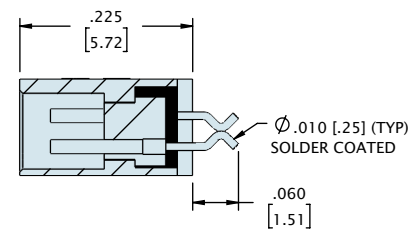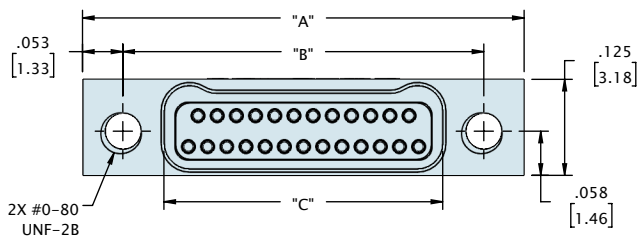


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.120 [28.45]	1.050 [26.67]	1.025 [26.04]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY




## ORDERING GUIDE

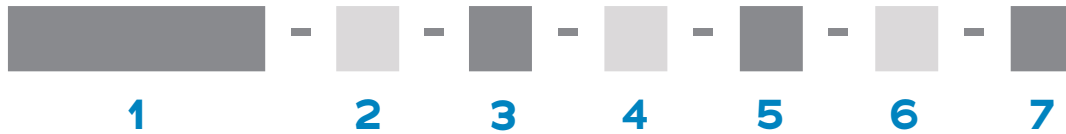

<b>1 Series</b>	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset
<b>2 Number Of Contacts</b>	<b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b> <b>65</b> <b>69</b> <b>85</b>	
<b>3 Termination Type</b>	<b>FF</b> Flex Tail	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminium Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## DUAL ROW PRE-WIRED (TYPE WD)

**Pre-Wired Dual Row Bi-Lobe<sup>®</sup>** nanos feature 30 AWG or smaller sizes of stranded wire. Omnetics assembles them using our proprietary semi-automated crimping system, as their very small size requires special care and precision to accomplish a perfect crimp. Each unit is carefully hand-inspected throughout the assembly process. Pre-crimped wires and contacts are potted in place to further protect the integrity of the crimp joint. Designers may specify wire type, size, and color coding to achieve a near-custom part. COTS versions with 18" of color-coded AWG Teflon are also available for quick turnaround. These connectors come in standard sizes ranging from 9 to 91 positions, as well as custom configurations. Omnetics also offers full QPL versions of MIL-DTL-32139.

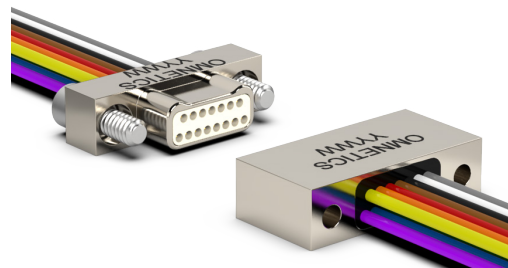

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact







### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW PRE-WIRED (TYPE WD)

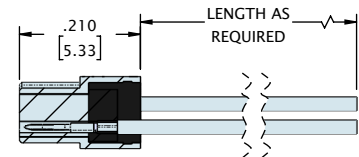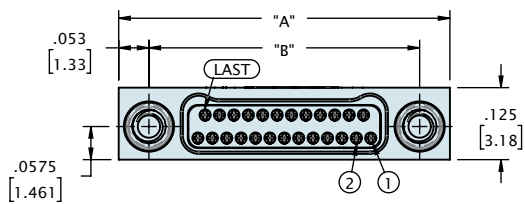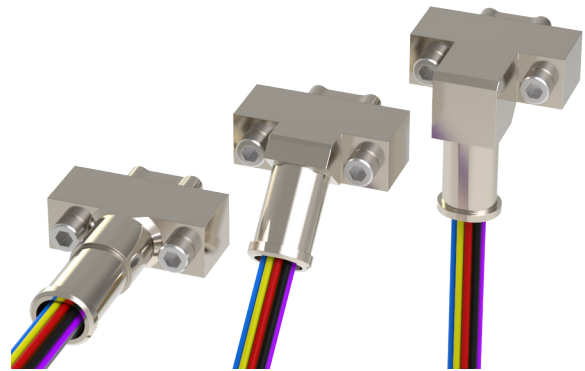
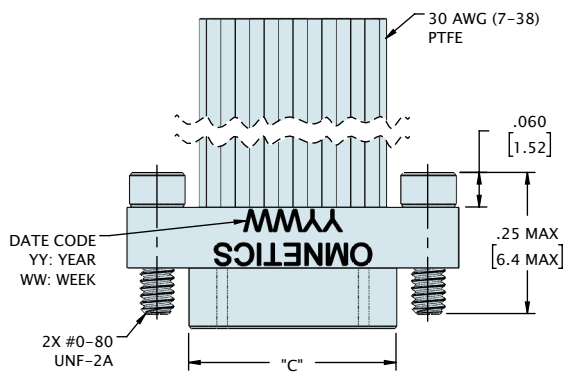
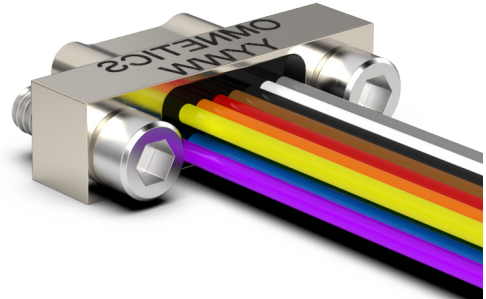
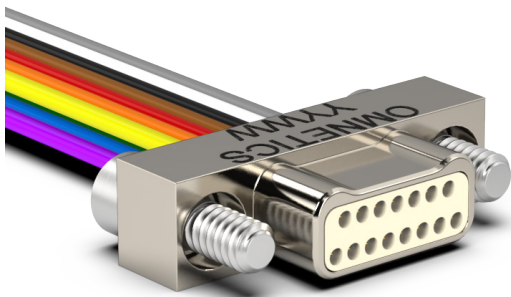


JACKSCREW HIDDEN FOR CLARITY

CONTACTS	"A"	"B"	"C"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]
69	1.125 [28.58]	1.020 [25.91]	.910 [23.11]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]
91	1.452 [36.88]	1.321 [33.55]	1.185 [30.10]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


# DUAL ROW PRE-WIRED (TYPE WD)

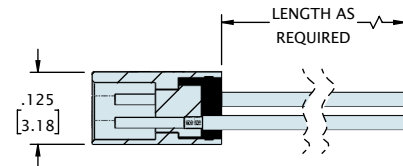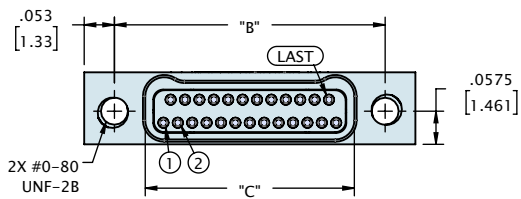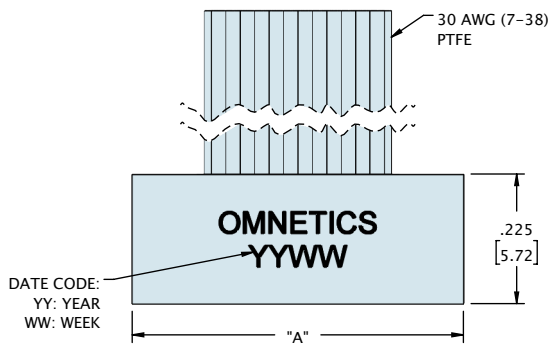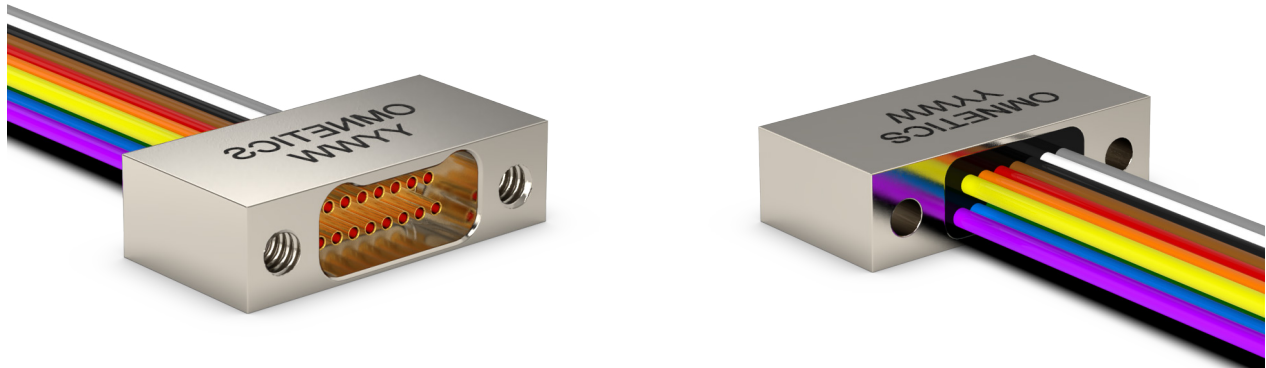

CONTACTS	"A"	"B"	"C"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]
15	.450 [11.43]	.345 [8.75]	.238 [6.05]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]
69	1.125 [28.58]	1.020 [25.91]	.913 [23.19]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]
91	1.452 [36.88]	1.321 [33.55]	1.188 [30.18]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


## ORDERING GUIDE

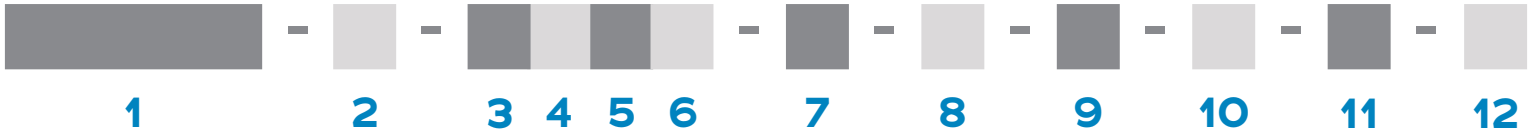

<b>1</b> Series	<b>MNPO</b> Metal Nano Pin Offset	<b>MNSO</b> Metal Nano Socket Offset
<b>2</b> Number Of Contacts	<b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b>	<b>65</b> <b>69</b> <b>85</b> <b>91</b>
<b>3</b> Termination Type	<b>WD</b> Discrete Wires	<b>WC</b> Cable
<b>4</b> Wire Gage	<b>0</b> 30 AWG (STD)	<b>2</b> 32 AWG
<b>5</b> Wire Type	<b>Q</b> NEMA HP3 (formerly M16878/4 and /6)	<b>S</b> M22759/33 (30 AWG only)
<b>6</b> Wire Length	<b>18.0</b> 18.00" (STD)	<b>XX.X</b> Custom Length
<b>7</b> Color Scheme	<b>C</b> 10 Repeating Colors Per MIL STD 681	<b>Y</b> All Other Wire Color
<b>8</b> Shell Material & Finish	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless steel Shell, Passivated
<b>9</b> Common Options	<b>ETH</b> End Threaded Hole, #0-80 <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>BS1</b> Standard Straight Backshell <b>BS3</b> 90/RA Oval <b>BSY</b> Custom Backshell	<b>EJS</b> End Jack Screw <b>RH</b> RoHS Compliant <b>BS2</b> 45 Oval <b>BS4</b> 2 Piece BS <b>CS</b> Customer Supplied Material
<b>10</b> Shield / Jacket	<b>D</b> Slip-on Braid <b>E</b> Machine Braid <b>F</b> Flexo Braid <b>J</b> Nomex Braid <b>ST</b> Shrink Tube	
<b>11</b> Mod Codes	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>12</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options	

## DUAL ROW JUMPERS (TYPE JUM)

Omnetics' **Pre-Wired Dual Row Bi-Lobe<sup>®</sup>** harnesses are built to order by Omnetics to offer maximum flexibility in wire type, size, and color-coding. They are designed to accommodate 30 AWG and smaller stranded wire and feature .025" (.64 mm) centerlines, which makes them an excellent choice for routing multiple lines through confined spaces. They feature Omnetics' gold-plated Flex Pin contact system. Shell material options include aluminum, titanium, and stainless steel, with custom plating options available upon request. These connectors are available in standard sizes ranging from 9 to 91 positions, as well as custom configurations.

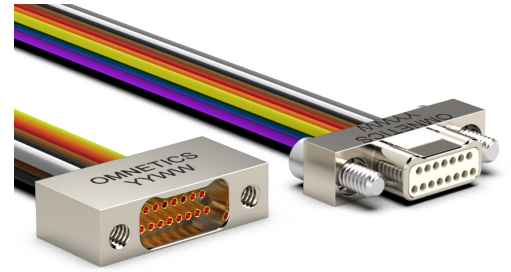

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact




### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW MALE TO MALE JUMPERS (TYPE JUM)

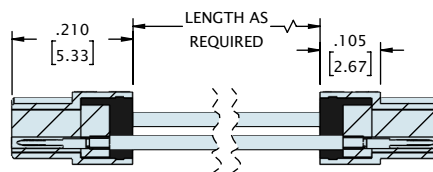
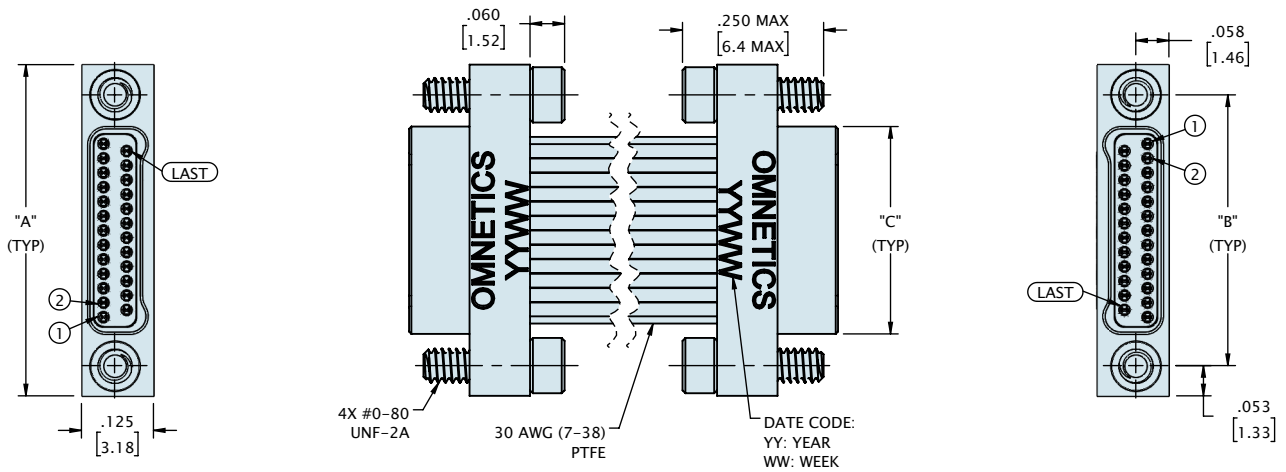
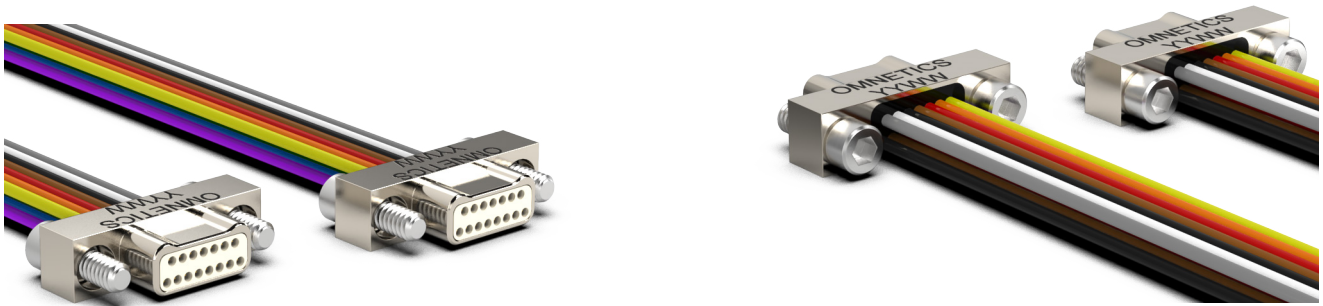


JACKSCREWS HIDDEN FOR CLARITY

CONTACTS	"A"	"B"	"C"
09	.375 [9.53]	.270 [6.86]	.160 [4.06]
15	.450 [11.43]	.345 [8.76]	.235 [5.97]
21	.525 [13.34]	.420 [10.67]	.310 [7.87]
25	.575 [14.61]	.470 [11.94]	.360 [9.14]
31	.650 [16.51]	.545 [13.84]	.435 [11.05]
37	.725 [18.42]	.620 [15.75]	.510 [12.95]
51	.900 [22.86]	.795 [20.19]	.685 [17.40]
65	1.075 [27.31]	.970 [24.64]	.860 [21.84]
69	1.125 [28.58]	1.020 [25.91]	.910 [23.11]
85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]
91	1.452 [36.88]	1.321 [33.55]	1.185 [30.10]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW MALE TO FEMALE JUMPERS (TYPE JUM)

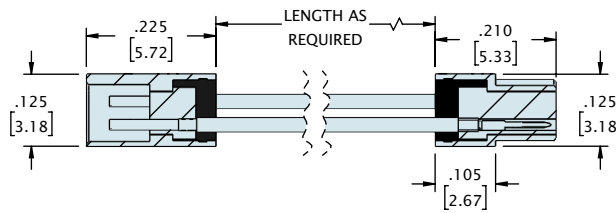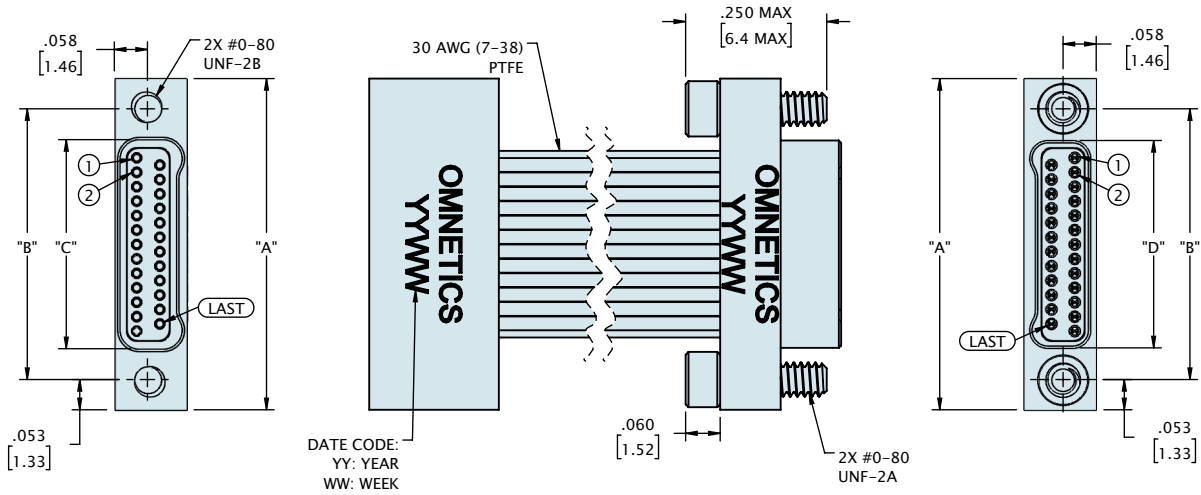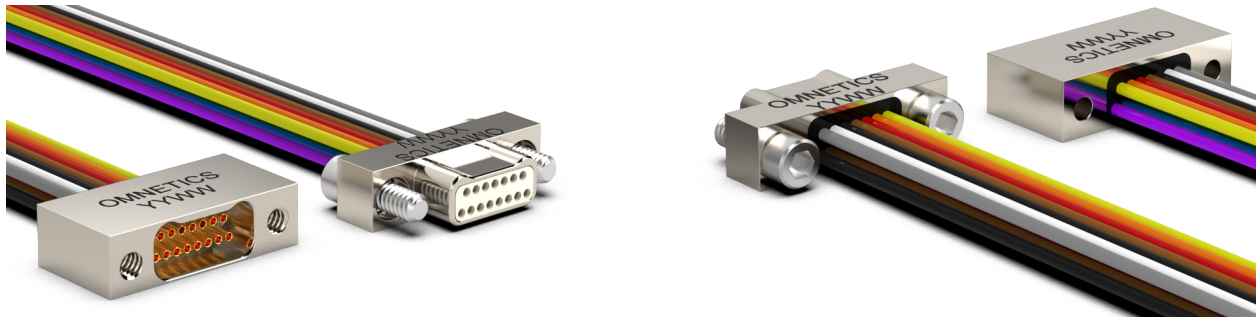



JACKSCREWS HIDDEN FOR CLARITY

CONTACTS	"A"	"B"	"C"	"D"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.160 [4.06]
15	.450 [11.43]	.345 [8.75]	.238 [6.05]	.235 [5.97]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.310 [7.87]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.360 [9.14]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.435 [11.05]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.510 [12.95]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.685 [17.40]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.860 [21.84]
69	1.125 [28.58]	1.020 [25.91]	.913 [23.19]	.910 [23.11]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]	1.110 [28.19]
91	1.452 [36.88]	1.321 [33.55]	1.188 [30.18]	1.185 [30.10]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY



# DUAL ROW FEMALE TO FEMALE JUMPERS (TYPE JUM)

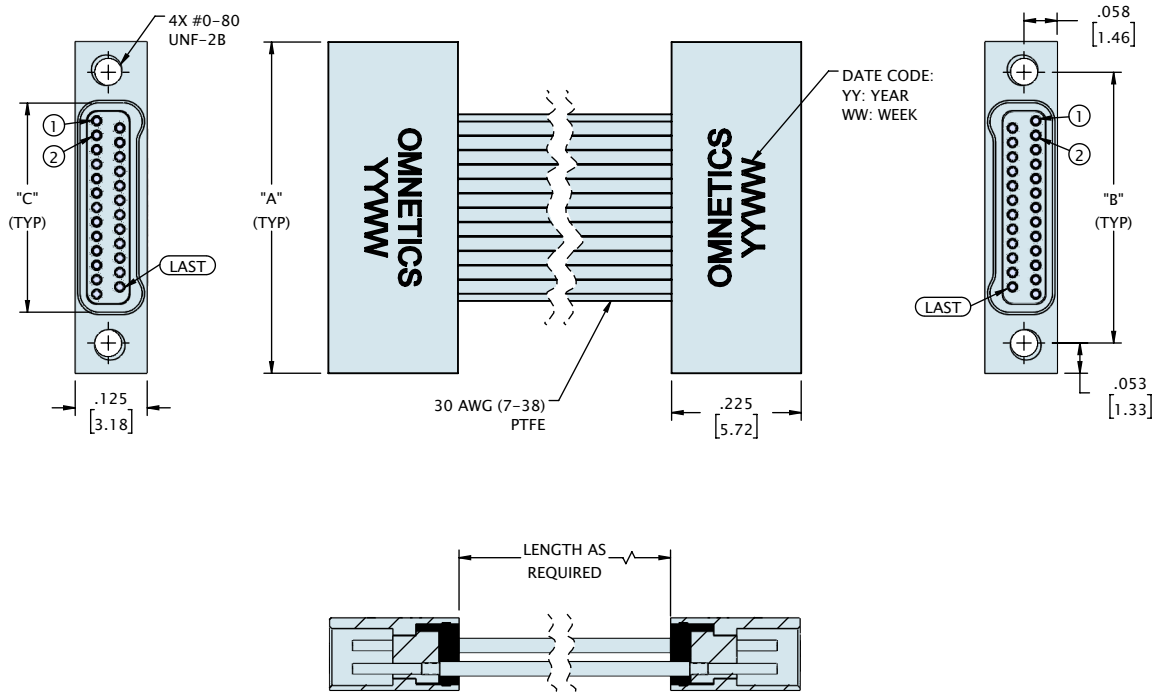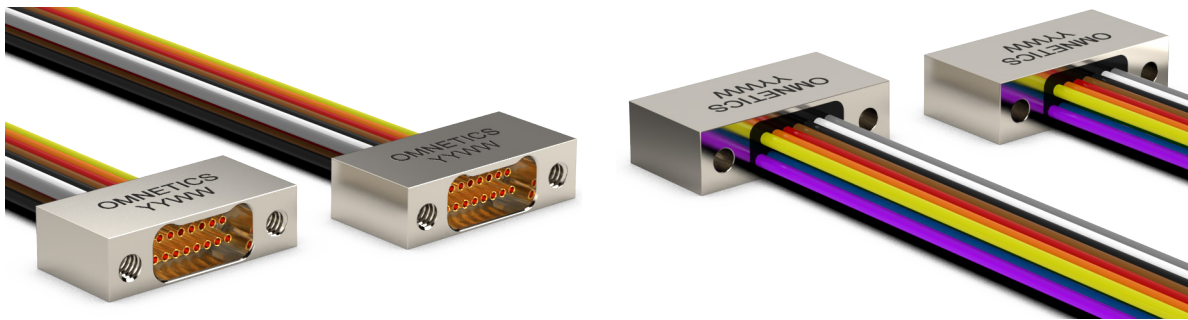


CONTACTS	"A"	"B"	"C"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]
15	.450 [11.43]	.345 [8.75]	.238 [6.05]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]
69	1.125 [28.58]	1.020 [25.91]	.913 [23.19]
85	1.325 [33.66]	1.220 [30.99]	1.113 [28.27]
91	1.452 [36.88]	1.321 [33.55]	1.188 [30.18]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


# DUAL ROW JUMPERS (TYPE JUM)

## ORDERING GUIDE

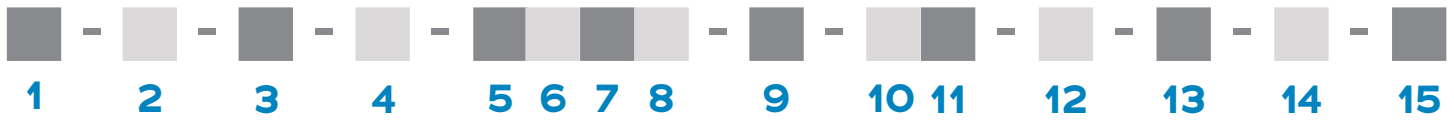

<b>1</b> Series	<b>JUM</b> Jumpers
<b>2</b> Number Of Contacts	<b>09 15 21 25 31 37 51 65 69 85 91</b>
<b>3</b> Connector 1	<b>MNPO</b> Metal Nano Pin Offset <b>MNSO</b> Metal Nano Socket Offset
<b>4</b> Connector 2	<b>MNPO</b> Metal Nano Pin Offset <b>MNSO</b> Metal Nano Socket Offset
<b>5</b> Termination	<b>WD</b> Discrete Leadwire <b>WC</b> Cable <b>WX</b> Multiple Wire Types <b>TW</b> Twisted Wires
<b>6</b> Wire AWG	<b>0</b> 30 AWG <b>2</b> 32 AWG
<b>7</b> Wire Type	<b>Q</b> NEMA HP3 <b>R</b> M22759/11 <b>S</b> M22759/33 <b>X</b> Other Wire Types
<b>8</b> Wire Length	<b>18.0</b> <b>XX.X</b>
<b>9</b> Color Coded	<b>C</b> 10 Repeating Colors Per MIL STD 681 <b>Y</b> All Other Wire Colors
<b>10</b> Shell / Material Finish	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>T</b> Titanium Shell, Unplated <b>B</b> Aluminium Shell, Black Anodized <b>CD</b> Aluminium shell, Cadmium Plated <b>BN</b> Aluminium Shell, Black Nickel Plated <b>P</b> Stainless steel Shell, Passivated
<b>11</b> Hardware	See table page 49
<b>12</b> Common Options	See table page 49
<b>13</b> Shield / Jacket	<b>D</b> Slip On Metal Braid <b>E</b> Machine Braid <b>F</b> Flexo Braid <b>J</b> Nomex Braid <b>ST</b> Shrink Tube
<b>14</b> Mod Codes	<b>M50</b> Space Grade Micro-D, SPT1 <b>M53</b> Space Grade Micro-D, SPT2
<b>15</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options

## ORDERING GUIDE



### 11 Hardware

- 00** None, Ø .092 Hole (STD)
- 01** Fixed Jack-Posts (STD)
- 02** Jackscrews, STD Length, Hex Head (STD)
- 03** Jackscrews, STD Length, Slotted
- 04** Jackscrews, Long, Hex
- 05** Jackscrews, Long, Slotted
- 06** Float Mount, Front Mounted
- 07** Float Mount, Rear Mounted
- 08** Non-removable
- 13** Fixed Jackspots (STD)
- 14** Jackscrews STD Length, Hex Head (STD)
- 15** One set of each, Fixed Jackspots & Jackscrews, Standard Length, Hex Head (STD)
- YY** Non Standard Hardware

### 12 Common Options

- |                                      |  |
|--------------------------------------|--|
| <b>ETH</b> End Threaded Hole, #0-80  | <b>EJS</b> End Jack Screw              |
| <b>HT</b> High Temp. Epoxy           | <b>RH</b> RoHS Compliant               |
| <b>FP</b> Front Panel Mount          | <b>SR</b> Strain Relief                |
| <b>CS</b> Customer Supplied Material | <b>RP</b> Rear Panel Mount             |
| <b>IS</b> Inline Shell               | <b>OR</b> O-Ring                       |
| <b>OM</b> Overmold                   | <b>BS1</b> Standard Straight Backshell |
| <b>BS2</b> 45 Oval                   | <b>BS3</b> 90/RA Oval                  |
| <b>BS4</b> 2 Piece BS                | <b>BSY</b> Custom Backshell            |

## DUAL ROW PANEL MOUNT

Omnetics' **Dual Row Bi-Lobe**<sup>®</sup> nanos are available with panel mount housings, which enables designers to use minimal real estate to create a streamlined I/O arrangement. Their low mass and .025" (.64 mm) centerlines make them an excellent choice for applications that endure high degrees of shock and vibration. Retention screws ensure a positive lock and termination options include pre-wired, SMT, flex mount, and straight tails. These durable, lightweight connectors feature Omnetics' gold-plated Flex Pin contact system and can intermate with all MIL-DTL-32139 plugs. Shell material options include aluminum and stainless steel, with custom plating options available upon request.



### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact




### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL RAW PANEL MOUNT (TYPE AA)

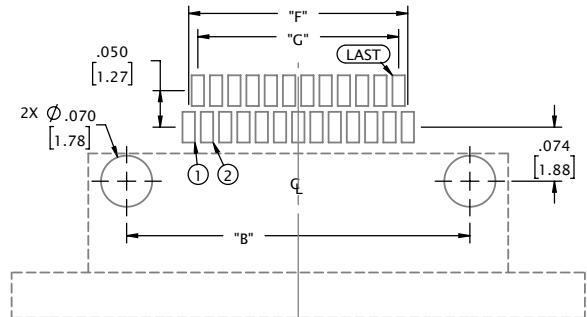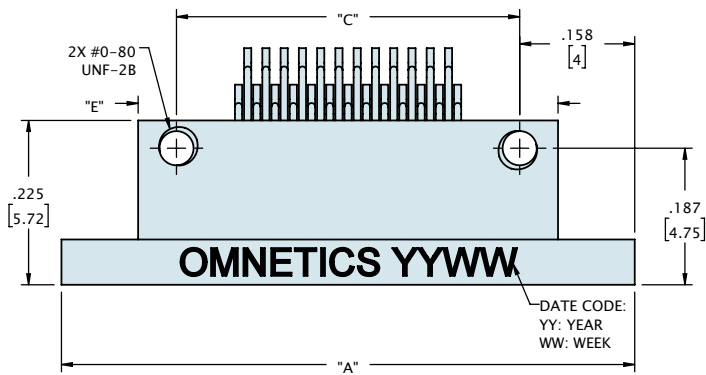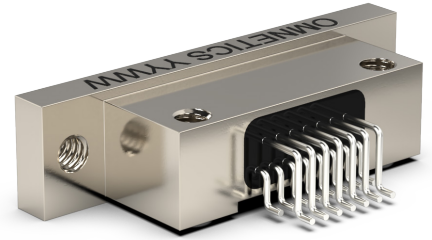




SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

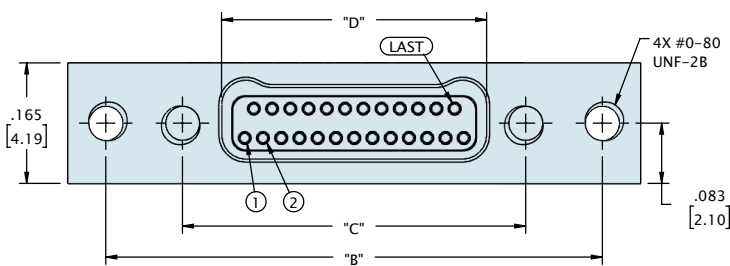



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"	"G"
09	.585 [14.86]	.480 [12.19]	.270 [6.86]	.163 [4.14]	.375 [9.53]	.100 [2.54]	.075 [1.91]
15	.660 [16.76]	.555 [14.10]	.345 [8.76]	.238 [6.05]	.450 [11.43]	.175 [4.45]	.150 [3.81]
21	.735 [18.67]	.630 [16.00]	.420 [10.67]	.313 [7.95]	.525 [13.34]	.250 [6.35]	.225 [5.72]
25	.785 [19.94]	.680 [17.27]	.470 [11.94]	.363 [9.22]	.575 [14.61]	.300 [7.62]	.275 [6.99]
31	.860 [21.84]	.755 [19.18]	.545 [13.84]	.438 [11.13]	.650 [16.51]	.375 [9.53]	.350 [8.89]
37	.935 [23.75]	.830 [21.08]	.620 [15.75]	.513 [13.03]	.725 [18.42]	.450 [11.43]	.425 [10.80]
51	1.110 [28.19]	1.005 [25.53]	.795 [20.19]	.688 [17.48]	.900 [22.86]	.625 [15.88]	.600 [15.24]
65	1.285 [32.64]	1.180 [29.97]	.970 [24.64]	.863 [21.92]	1.075 [27.31]	.800 [20.32]	.775 [19.69]
85	1.535 [38.99]	1.430 [36.32]	1.220 [30.99]	1.113 [28.27]	1.325 [33.66]	1.050 [26.67]	1.025 [26.04]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW PANEL MOUNT (TYPE DD)

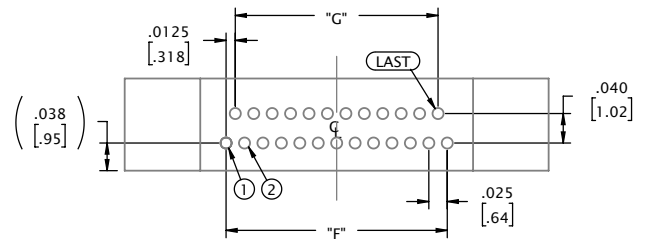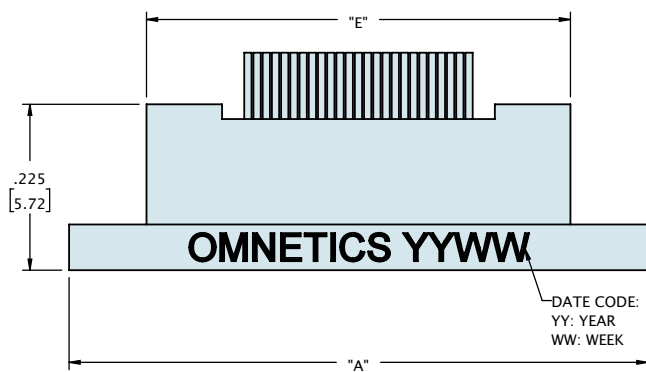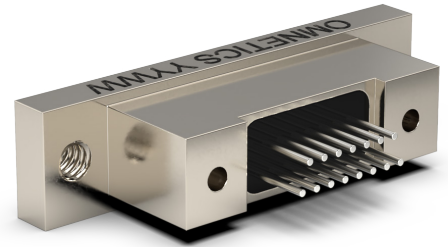




SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

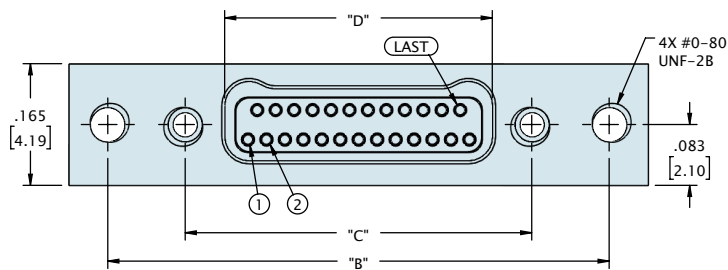



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"	"G"
9	.585 [14.86]	.480 [12.19]	.270 [6.86]	.163 [4.14]	.375 [9.53]	.100 [2.54]	.075 [1.91]
15	.660 [16.76]	.555 [14.10]	.345 [8.76]	.238 [6.05]	.450 [11.43]	.175 [4.45]	.150 [3.81]
21	.735 [18.67]	.630 [16.00]	.420 [10.67]	.313 [7.95]	.525 [13.34]	.250 [6.35]	.225 [5.72]
25	.785 [19.94]	.680 [17.27]	.470 [11.94]	.363 [9.22]	.575 [14.61]	.300 [7.62]	.275 [6.99]
31	.860 [21.84]	.755 [19.18]	.545 [13.84]	.438 [11.13]	.650 [16.51]	.375 [9.53]	.350 [8.89]
37	.935 [23.75]	.830 [21.08]	.620 [15.75]	.513 [13.03]	.725 [18.42]	.450 [11.43]	.425 [10.80]
51	1.110 [28.19]	1.005 [25.53]	.795 [20.19]	.688 [17.48]	.900 [22.86]	.625 [15.88]	.600 [15.24]
65	1.285 [32.64]	1.180 [29.97]	.970 [24.64]	.863 [21.92]	1.075 [27.31]	.800 [20.32]	.775 [19.69]
69	1.335 [33.91]	1.230 [31.24]	1.020 [25.91]	.913 [23.19]	1.125 [28.58]	.850 [21.59]	.825 [20.96]
85	1.535 [38.99]	1.430 [36.32]	1.220 [30.99]	1.113 [28.27]	1.325 [33.66]	1.050 [26.67]	1.025 [26.04]
91	1.636 [41.55]	1.531 [38.89]	1.321 [33.55]	1.188 [30.16]	1.400 [35.56]	1.125 [28.58]	1.100 [27.94]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL RAW PANEL MOUNT (TYPE FF)

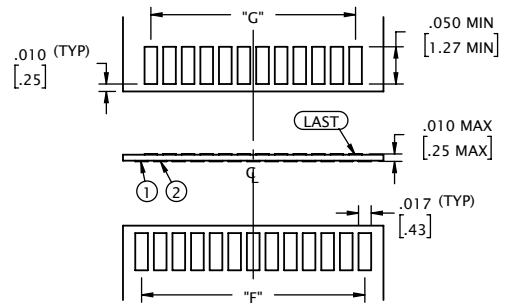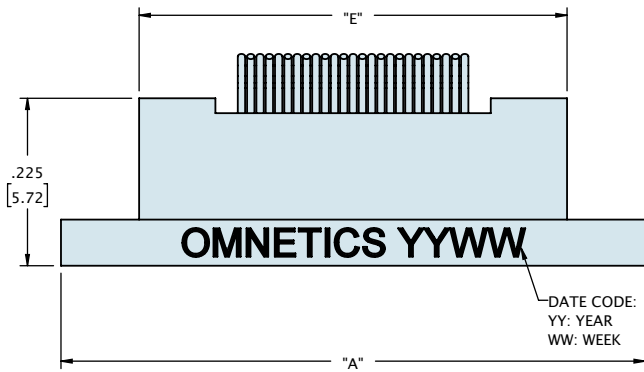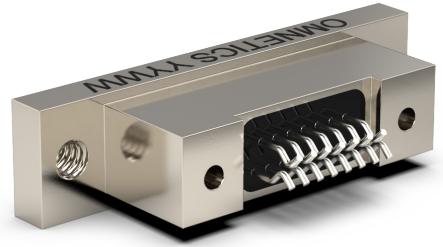




SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

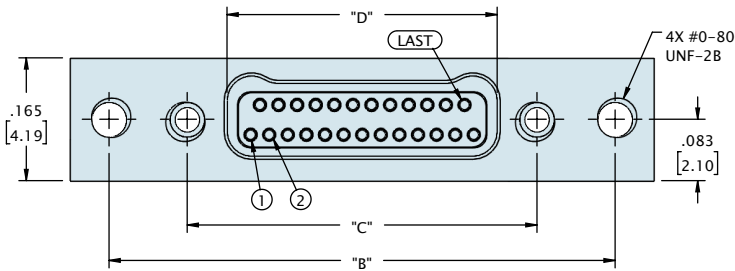

CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"	"G"
9	.585 [14.86]	.480 [12.19]	.270 [6.86]	.163 [4.14]	.375 [9.53]	.100 [2.54]	.075 [1.91]
15	.660 [16.76]	.555 [14.10]	.345 [8.76]	.238 [6.05]	.450 [11.43]	.175 [4.45]	.150 [3.81]
21	.735 [18.67]	.630 [16.00]	.420 [10.67]	.313 [7.95]	.525 [13.34]	.250 [6.35]	.225 [5.72]
25	.785 [19.94]	.680 [17.27]	.470 [11.94]	.363 [9.22]	.575 [14.61]	.300 [7.62]	.275 [6.99]
31	.860 [21.84]	.755 [19.18]	.545 [13.84]	.438 [11.13]	.650 [16.51]	.375 [9.53]	.350 [8.89]
37	.935 [23.75]	.830 [21.08]	.620 [15.75]	.513 [13.03]	.725 [18.42]	.450 [11.43]	.425 [10.80]
51	1.110 [28.19]	1.005 [25.53]	.795 [20.19]	.688 [17.48]	.900 [22.86]	.625 [15.88]	.600 [15.24]
65	1.285 [32.64]	1.180 [29.97]	.970 [24.64]	.863 [21.92]	1.075 [27.31]	.800 [20.32]	.775 [19.69]
85	1.535 [38.99]	1.430 [36.32]	1.220 [30.99]	1.113 [28.27]	1.325 [33.66]	1.050 [26.67]	1.025 [26.04]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW PANEL MOUNT (TYPE WD)

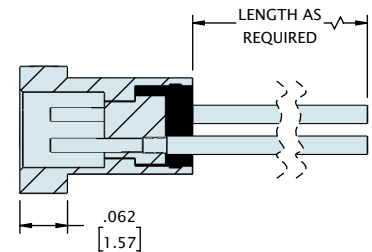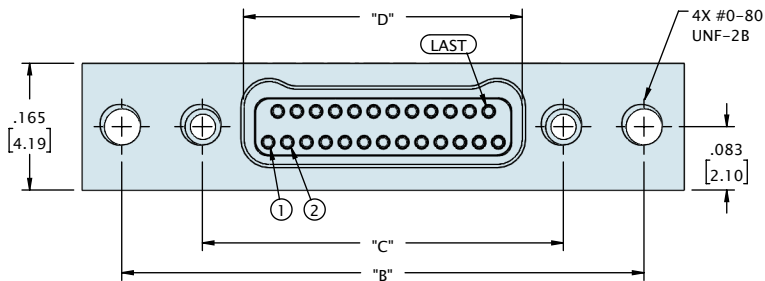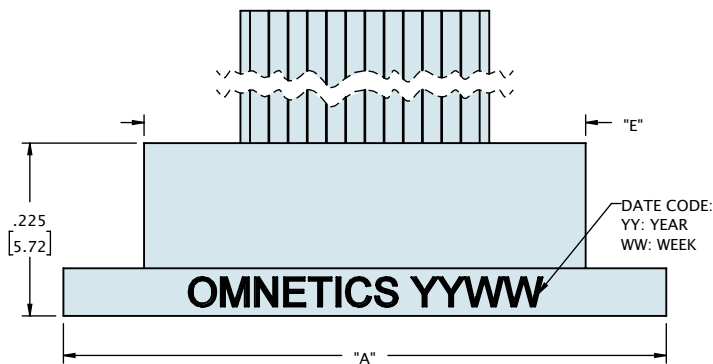


CONTACTS	"A"	"B"	"C"	"D"	"E"
9	.585 [14.86]	.480 [12.19]	.270 [6.86]	.163 [4.14]	.375 [9.53]
15	.660 [16.76]	.555 [14.10]	.345 [8.76]	.238 [6.05]	.450 [11.43]
21	.735 [18.67]	.630 [16.00]	.420 [10.67]	.313 [7.95]	.525 [13.34]
25	.785 [19.94]	.680 [17.27]	.470 [11.94]	.363 [9.22]	.575 [14.61]
31	.860 [21.84]	.755 [19.18]	.545 [13.84]	.438 [11.13]	.650 [16.51]
37	.935 [23.75]	.830 [21.08]	.620 [15.75]	.513 [13.03]	.725 [18.42]
51	1.110 [28.19]	1.005 [25.53]	.795 [20.19]	.688 [17.48]	.900 [22.86]
65	1.285 [32.64]	1.180 [29.97]	.970 [24.64]	.863 [21.92]	1.075 [27.31]
85	1.535 [38.99]	1.430 [36.32]	1.220 [30.99]	1.113 [28.27]	1.325 [33.66]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY



## ORDERING GUIDE

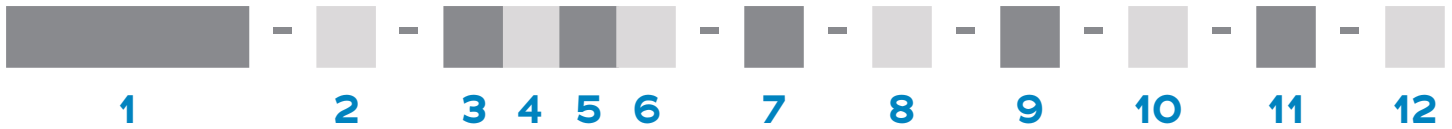

<b>1</b> Series	<b>MNSOP</b> Metal Nano Socket Offset Panel											
<b>2</b> Number Of Contacts	<b>09</b>	<b>15</b>	<b>21</b>	<b>25</b>	<b>31</b>	<b>37</b>	<b>51</b>	<b>65</b>	<b>69</b>	<b>85</b>	<b>91</b>	
<b>3</b> Termination Type	<b>A</b> Horizontal Surface Mount						<b>DD</b> Thru-Hole Straight					
	<b>FF</b> Flex Mount						<b>WD</b> Discrete Wires					
<b>4</b> Wire Gage*	<b>0</b> 30 AWG (STD)					<b>2</b> 32 AWG						
<b>5</b> Wire Type*	<b>Q</b> NEMA HP3 (formerly M16878/4 and /6)								<b>S</b> M22759/33 (30 AWG only)			
<b>6</b> Wire Length*	<b>18.0</b> 18.00" (STD)								<b>XX.X</b> Custom Length			
<b>7</b> Color Scheme*	<b>C</b> 10 repeating colors per MIL STD 681								<b>Y</b> All other wire colors			
<b>8</b> Shell Material & Finish	<b>N</b> Aluminum Shell, Electroless Nickel Plated						<b>CD</b> Aluminium shell, Cadmium Plated					
	<b>B</b> Aluminium Shell, Black Anodized						<b>S</b> Stainless steel Shell, Passivated					
	<b>T</b> Titanium Shell, Unplated											
<b>9</b> Common Options	<b>ETH</b> End Threaded Hole, #0-80						<b>EJS</b> End Jack Screw					
	<b>NTH</b> Non-Threaded Holes for mounting to the board											
	<b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw)											
	<b>HT</b> High Temp. Epoxy						<b>RH</b> RoHS Compliant					
	<b>CS</b> Customer Supplied Material											
<b>10</b> Shield / Jacket*	<b>D</b> Slip-on Braid	<b>E</b> Machine Braid	<b>F</b> Flexo Braid	<b>J</b> Nomex Braid	<b>ST</b> Shrink Tube							
<b>11</b> Mod Codes	<b>M10</b> Custom Keying								<b>M50</b> Space Grade Nano-D, SPT1			
	<b>M53</b> Space Grade Nano-D, SPT2											
<b>12</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options											

\* WD only

# DUAL ROW LATCHING BI-LOBE®

Omnetics' **Bi-Lobe®** connectors are available in a quick-latch version. This option requires no tools and makes it very easy for operators to achieve a secure connection in the field. These durable, lightweight connectors feature Omnetics' gold-plated Flex Pin contact system and ensure connectivity in the most demanding applications. They are spaced on .025" (.64 mm) centerlines and can carry 1 amp per contact. These connectors are available in standard sizes ranging from 9 to 65 positions, and can be configured with discrete wires, over-molded cable, panel mount housings, and PCB-mounted versions.



## Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact






## Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

## Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# DUAL ROW LATCHING BI-LOBE® (TYPE AA)

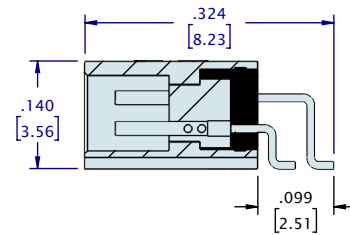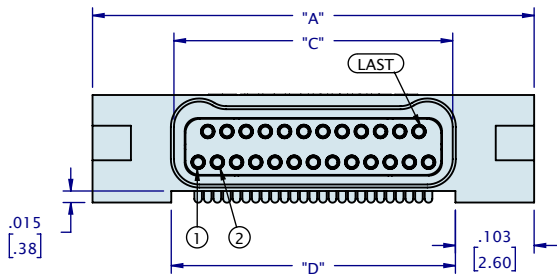
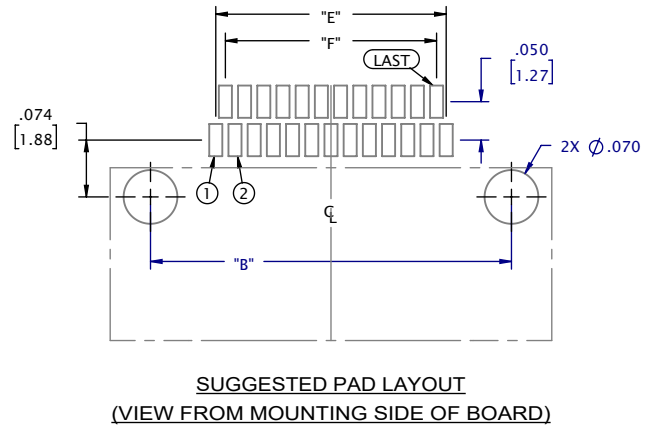
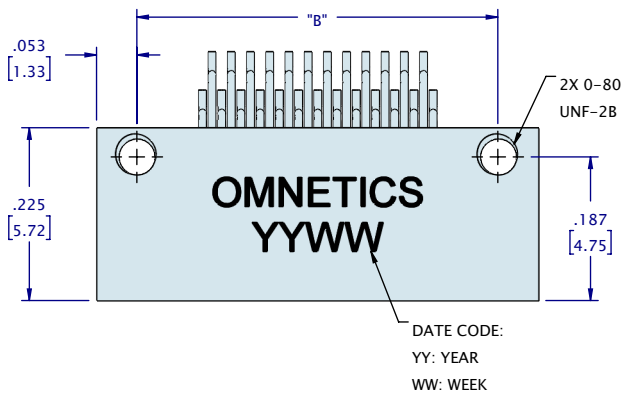
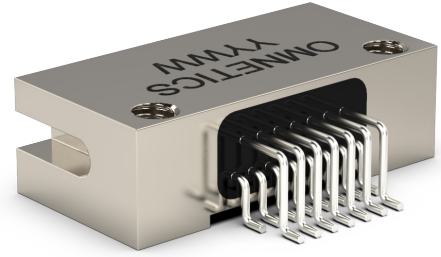


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]



DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE AA)

## PANEL MOUNT

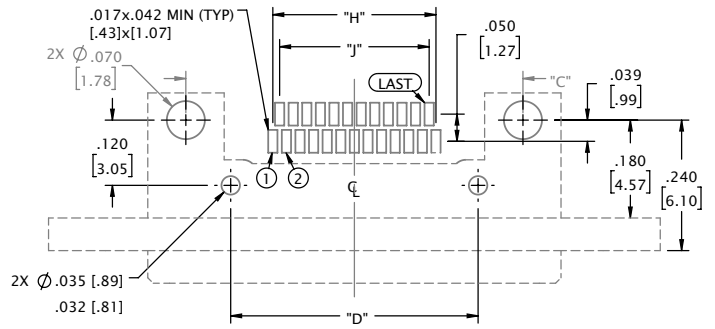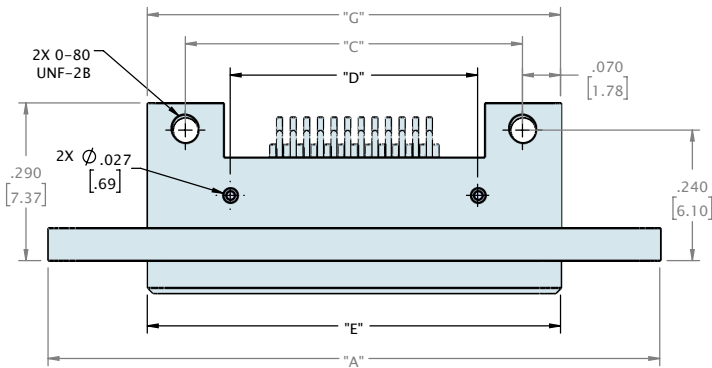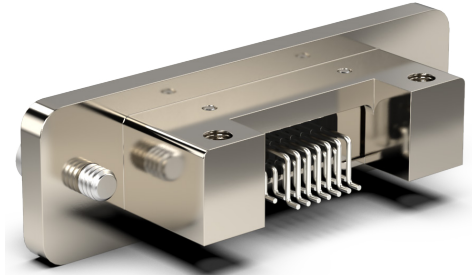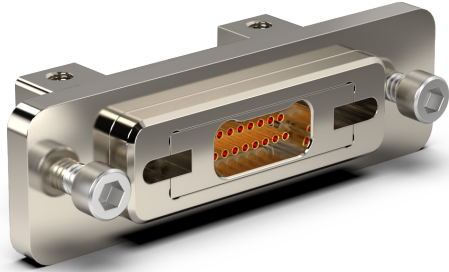





**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

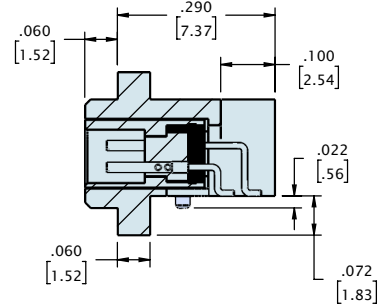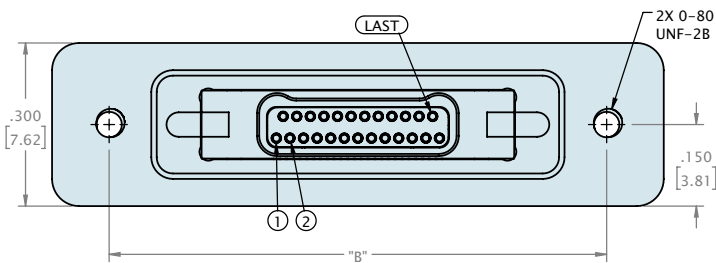



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"
09	.925 [23.50]	.715 [18.16]	.420 [10.67]	.255 [6.48]	.560 [14.22]	.279 [7.09]	.560 [14.22]	.075 [1.91]	.100 [2.54]
15	1.000 [25.40]	.790 [20.07]	.495 [12.57]	.330 [8.38]	.635 [16.13]	.354 [8.99]	.635 [16.13]	.150 [3.81]	.175 [4.45]
21	1.075 [27.31]	.865 [21.97]	.570 [14.48]	.405 [10.29]	.710 [18.03]	.429 [10.90]	.710 [18.03]	.225 [5.72]	.250 [6.35]
25	1.125 [28.58]	.915 [23.24]	.620 [15.75]	.455 [11.56]	.760 [19.30]	.479 [12.17]	.760 [19.30]	.275 [6.99]	.300 [7.62]
31	1.200 [30.48]	.990 [25.15]	.695 [17.65]	.530 [13.46]	.835 [21.21]	.554 [14.07]	.835 [21.21]	.350 [8.89]	.375 [9.53]
37	1.275 [32.39]	1.065 [27.05]	.770 [19.56]	.605 [15.37]	.910 [23.11]	.629 [15.98]	.910 [23.11]	.425 [10.80]	.450 [11.43]
51	1.450 [36.83]	1.240 [31.50]	.945 [24.00]	.780 [19.81]	1.085 [27.56]	.804 [20.42]	1.085 [27.56]	.600 [15.24]	.625 [15.88]
65	1.625 [41.28]	1.415 [35.94]	1.120 [28.45]	.955 [24.26]	1.260 [32.00]	.979 [24.87]	1.260 [32.00]	.775 [19.69]	.800 [20.32]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE DD)

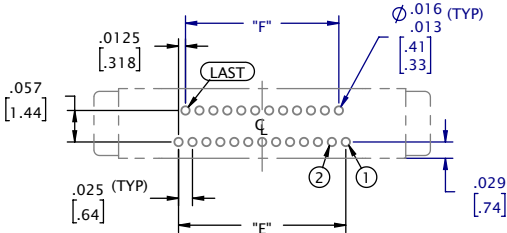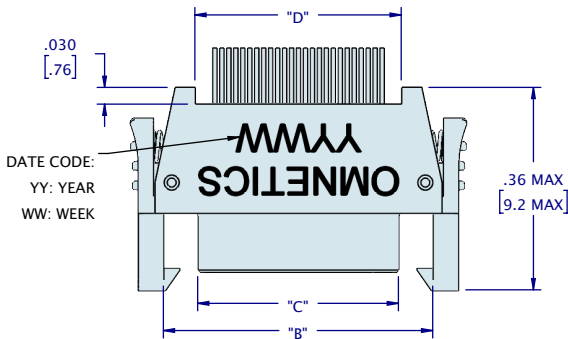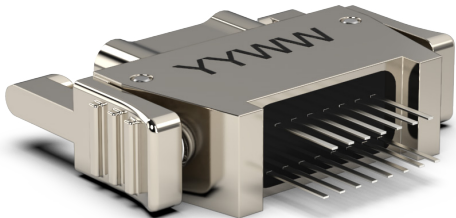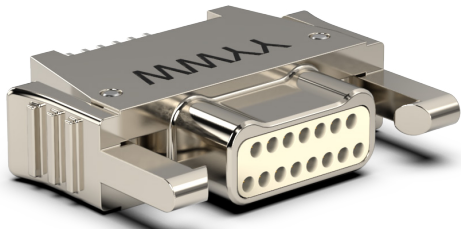





SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

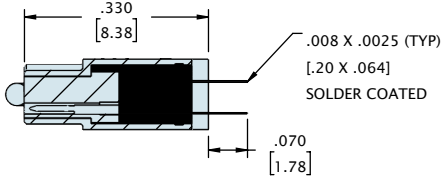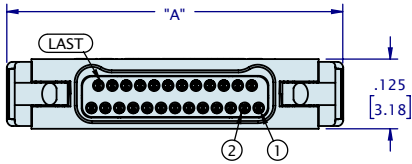



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.403 [10.25]	.283 [7.19]	.160 [4.06]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.478 [12.15]	.358 [9.09]	.235 [5.97]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.553 [14.06]	.433 [11.00]	.310 [7.87]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.603 [15.33]	.483 [12.27]	.360 [9.14]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.678 [17.23]	.558 [14.17]	.435 [11.05]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.753 [19.14]	.633 [16.08]	.510 [12.95]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.928 [23.58]	.808 [20.52]	.685 [17.40]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.103 [28.03]	.983 [24.97]	.860 [21.84]	.870 [22.10]	.800 [20.32]	.775 [19.69]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE DD)

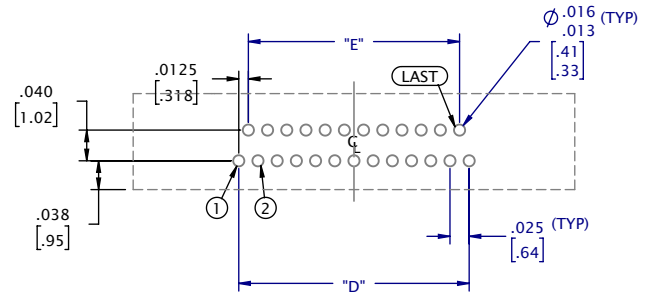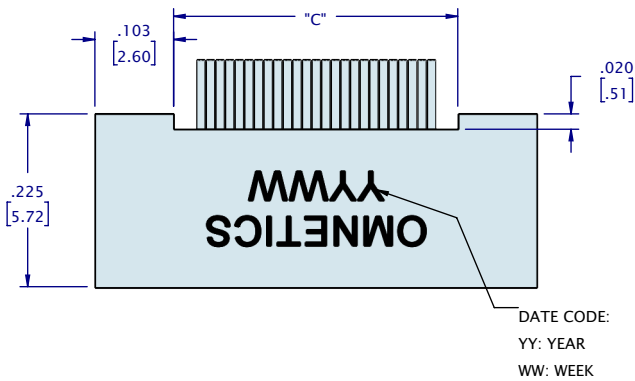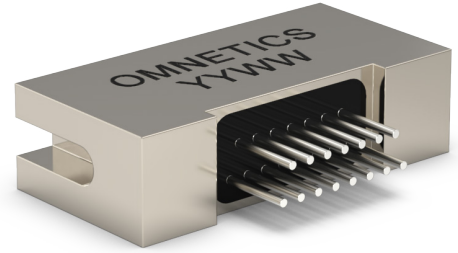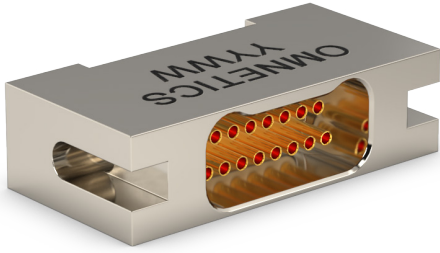

SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)


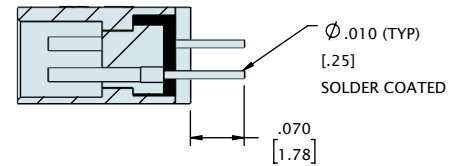
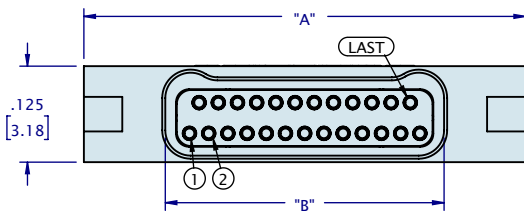


CONTACTS	"A"	"B"	"C"	"D"	"E"
09	.375 [9.53]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]



DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE DD)

## PANEL MOUNT


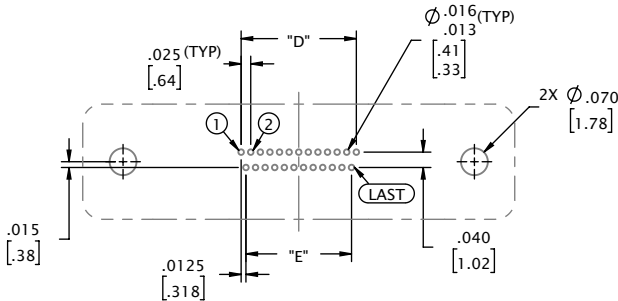
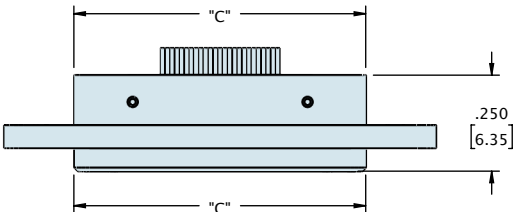
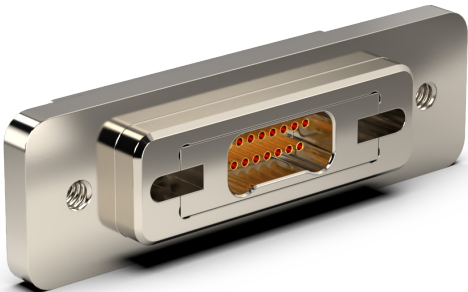


SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

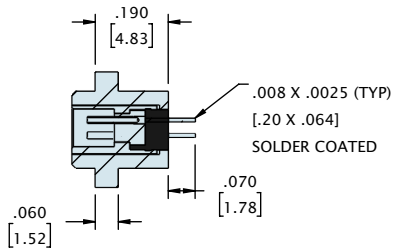
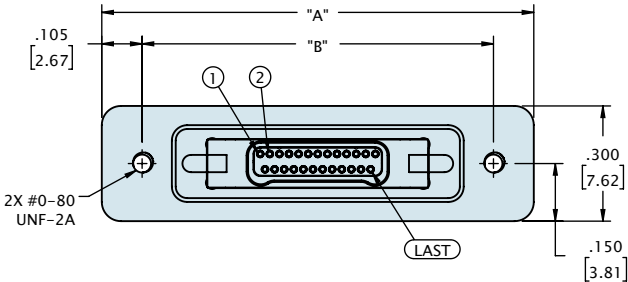


CONTACTS	"A"	"B"	"C"	"D"	"E"
09	.925 [23.50]	.715 [18.16]	.560 [14.22]	.100 [2.54]	.075 [1.91]
15	1.000 [25.40]	.790 [20.07]	.635 [16.13]	.175 [4.45]	.150 [3.81]
21	1.075 [27.31]	.865 [21.97]	.710 [18.03]	.250 [6.35]	.225 [5.72]
25	1.125 [28.58]	.915 [23.24]	.760 [19.30]	.300 [7.62]	.275 [6.99]
31	1.200 [30.48]	.990 [25.15]	.835 [21.21]	.375 [9.53]	.350 [8.89]
37	1.275 [32.39]	1.065 [27.05]	.910 [23.11]	.450 [11.43]	.425 [10.80]
51	1.450 [36.83]	1.240 [31.50]	1.085 [27.56]	.625 [15.88]	.600 [15.24]
65	1.625 [41.28]	1.415 [35.94]	1.260 [32.00]	.800 [20.32]	.775 [19.69]

# DUAL ROW LATCHING BI-LOBE® (TYPE FF)

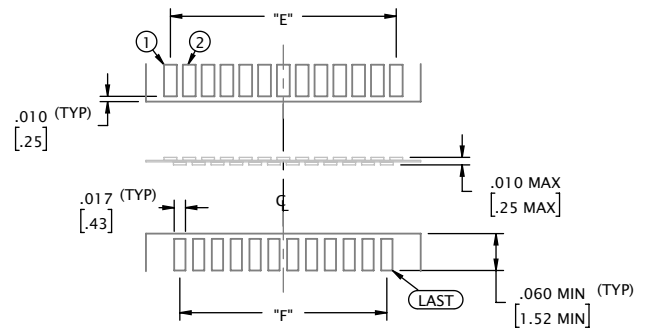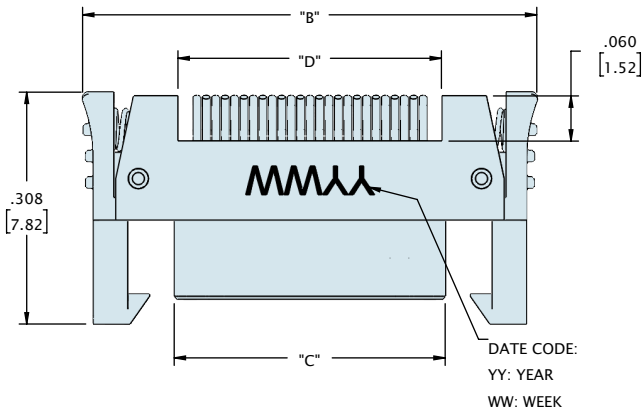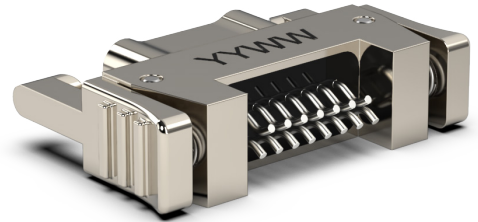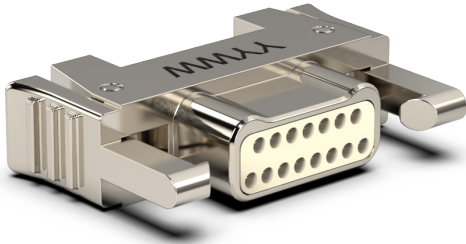

**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)



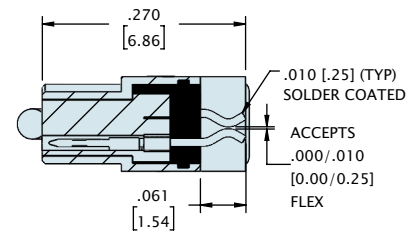
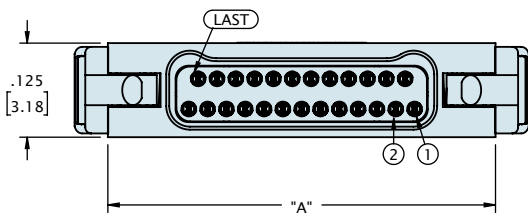


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.404 [10.25]	.283 [7.19]	.160 [4.06]	.150 [3.81]	.100 [2.54]	.075 [1.90]
15	.479 [12.15]	.358 [9.09]	.235 [5.97]	.225 [5.72]	.175 [4.45]	.150 [3.81]
21	.554 [14.06]	.433 [11.00]	.310 [7.87]	.300 [7.62]	.250 [6.35]	.225 [5.71]
25	.604 [15.33]	.483 [12.27]	.360 [9.14]	.350 [8.89]	.300 [7.62]	.275 [6.98]
31	.679 [17.23]	.558 [14.17]	.435 [11.05]	.425 [10.80]	.375 [9.53]	.350 [8.89]
37	.754 [19.14]	.633 [16.08]	.510 [12.95]	.500 [12.70]	.450 [11.43]	.425 [10.79]
51	.929 [23.58]	.808 [20.52]	.685 [17.40]	.675 [17.15]	.625 [15.88]	.600 [15.24]
65	1.104 [28.03]	.983 [24.97]	.860 [21.84]	.850 [21.59]	.800 [20.32]	.775 [19.68]



DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY



# DUAL ROW LATCHING BI-LOBE® (TYPE FF)

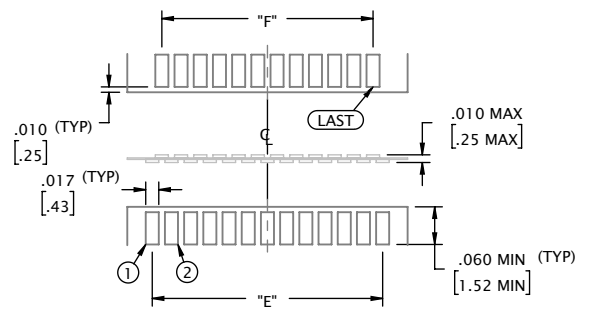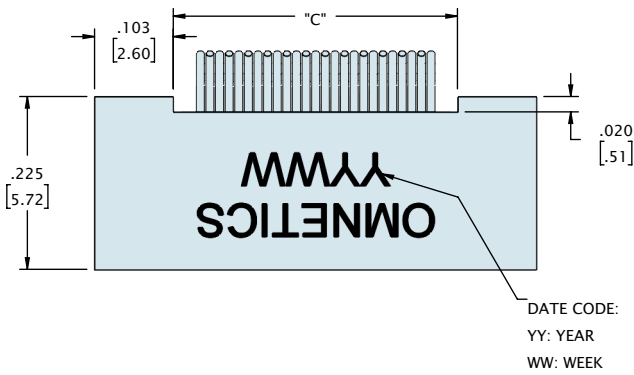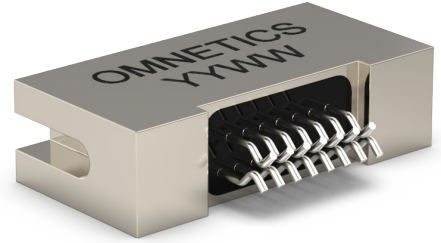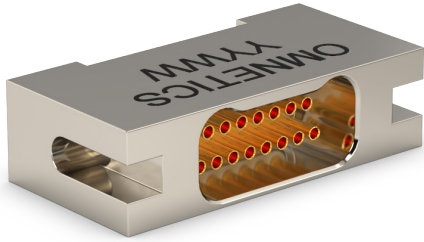






**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

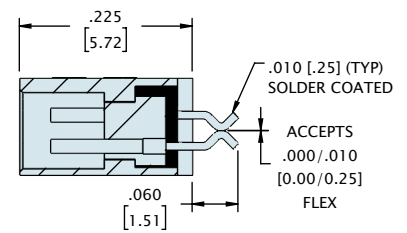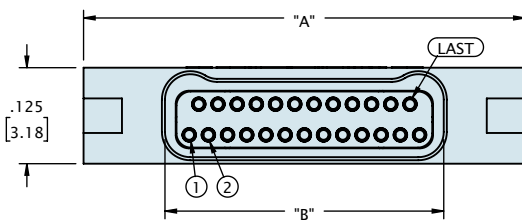

CONTACTS	"A"	"B"	"C"	"D"	"E"
09	.375 [9.53]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.238 [6.05]	.245 [6.22]	.175 [4.44]	.150 [3.81]
21	.525 [13.34]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.438 [11.13]	.445 [11.30]	.375 [9.52]	.350 [8.89]
37	.725 [18.42]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE H4)

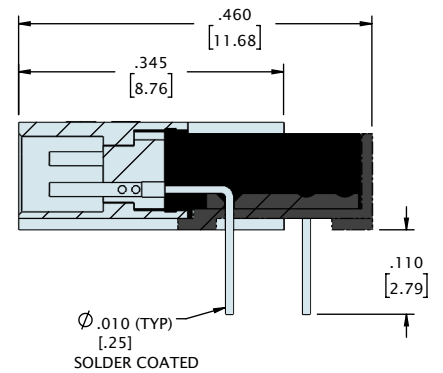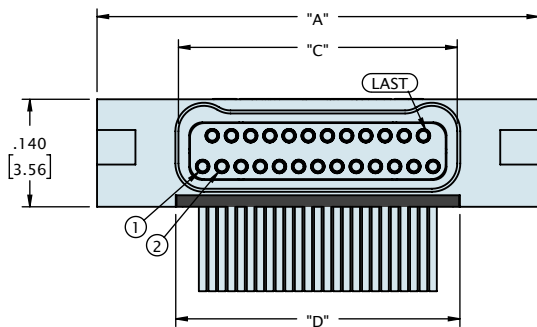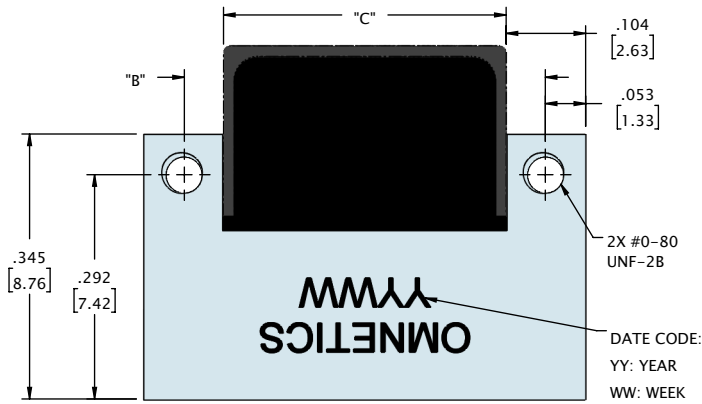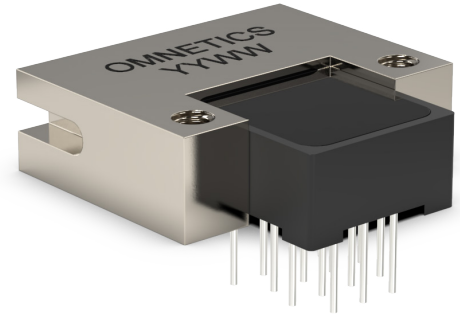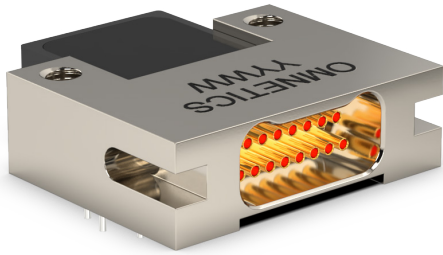


CONTACTS	"A"	"B"	"C"	"D"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]


DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE H4)


9 CONTACT SOCKET




21 CONTACT SOCKET




31 CONTACT SOCKET

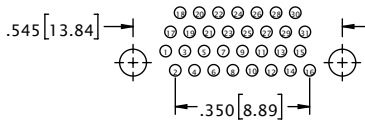


51 CONTACT SOCKET

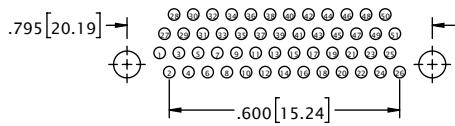


15 CONTACT SOCKET





25 CONTACT SOCKET

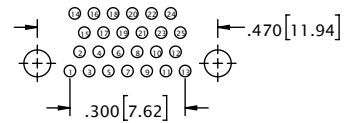





37 CONTACT SOCKET

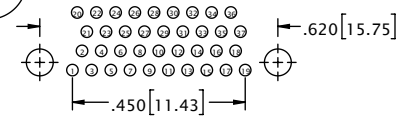




65 CONTACT SOCKET

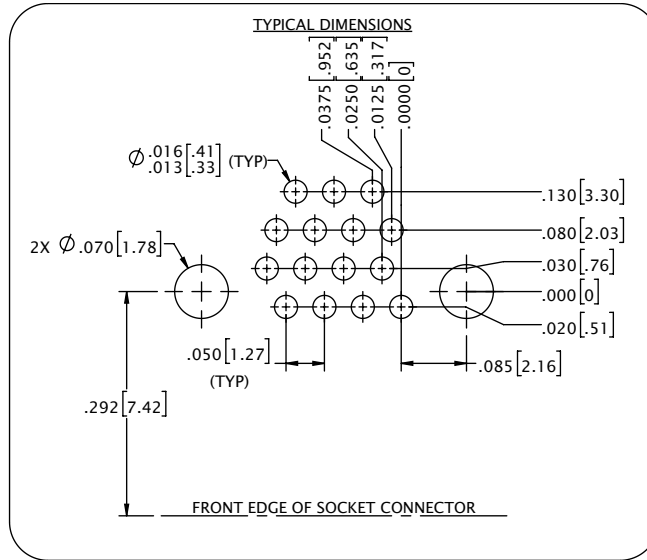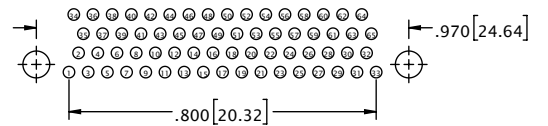

# DUAL ROW LATCHING BI-LOBE® (TYPE VV)

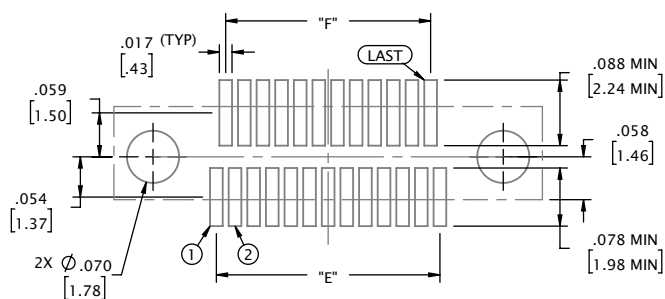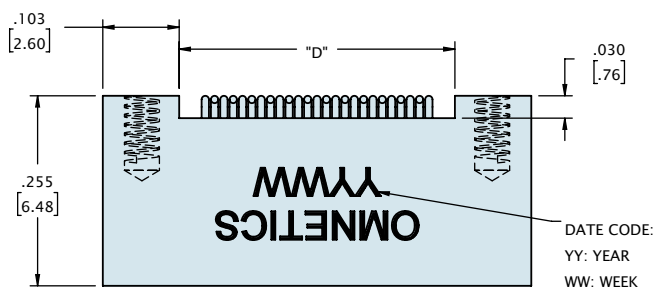





SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

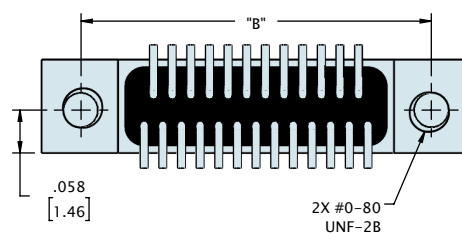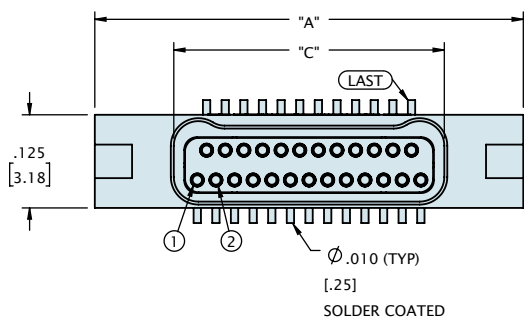

CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
09	.375 [9.53]	.270 [6.86]	.163 [4.14]	.170 [4.32]	.100 [2.54]	.075 [1.91]
15	.450 [11.43]	.345 [8.76]	.238 [6.05]	.245 [6.22]	.175 [4.45]	.150 [3.81]
21	.525 [13.34]	.420 [10.67]	.313 [7.95]	.320 [8.13]	.250 [6.35]	.225 [5.72]
25	.575 [14.61]	.470 [11.94]	.363 [9.22]	.370 [9.40]	.300 [7.62]	.275 [6.99]
31	.650 [16.51]	.545 [13.84]	.438 [11.13]	.445 [11.30]	.375 [9.53]	.350 [8.89]
37	.725 [18.42]	.620 [15.75]	.513 [13.03]	.520 [13.21]	.450 [11.43]	.425 [10.80]
51	.900 [22.86]	.795 [20.19]	.688 [17.48]	.695 [17.65]	.625 [15.88]	.600 [15.24]
65	1.075 [27.31]	.970 [24.64]	.863 [21.92]	.870 [22.10]	.800 [20.32]	.775 [19.69]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY






# DUAL ROW LATCHING BI-LOBE® (TYPE WD)

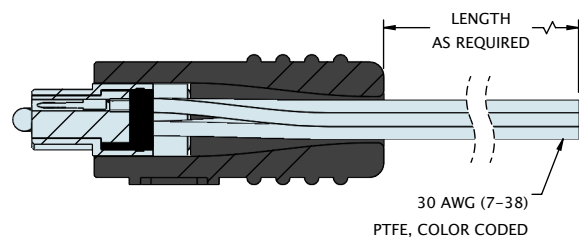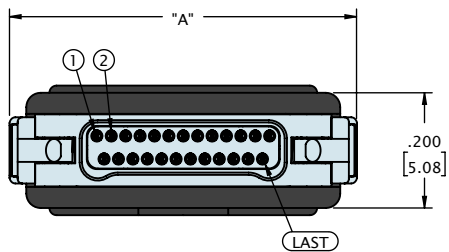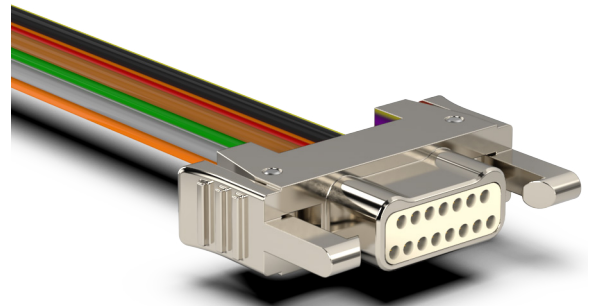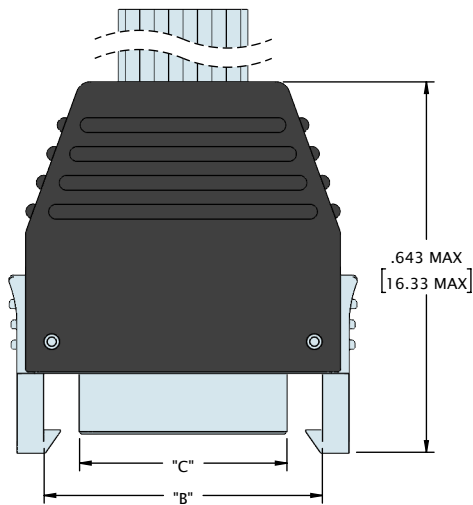

CONTACTS	"A"	"B"	"C"
09	.403 [10.25]	.283 [7.19]	.160 [4.06]
15	.478 [12.15]	.358 [9.09]	.235 [5.97]
21	.553 [14.06]	.433 [11.00]	.310 [7.87]
25	.603 [15.33]	.483 [12.27]	.360 [9.14]
31	.678 [17.23]	.558 [14.17]	.435 [11.05]
37	.753 [19.14]	.633 [16.08]	.510 [12.95]
51	.928 [23.58]	.808 [20.52]	.685 [17.40]
65	1.103 [28.03]	.983 [24.97]	.860 [21.84]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE WD)

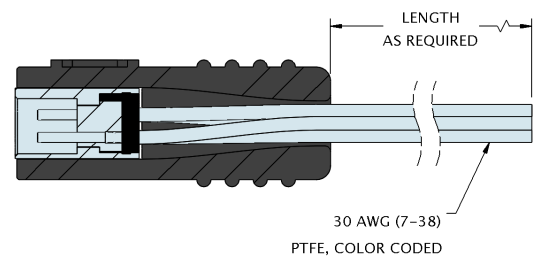
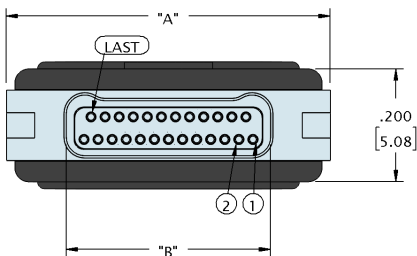
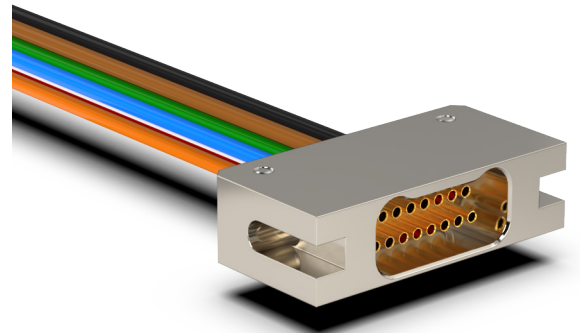
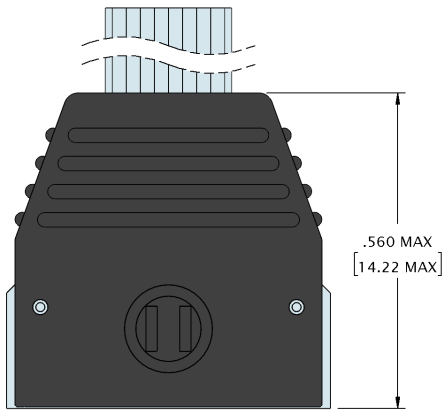
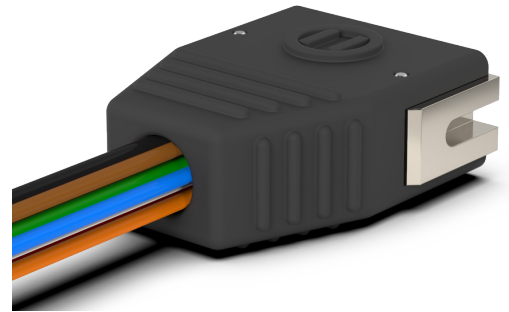


CONTACTS	"A"	"B"
09	.375 [9.53]	.163 [4.14]
15	.450 [11.43]	.238 [6.05]
21	.525 [13.34]	.313 [7.95]
25	.575 [14.61]	.363 [9.22]
31	.650 [16.51]	.438 [11.13]
37	.725 [18.42]	.513 [13.03]
51	.900 [22.86]	.688 [17.48]
65	1.075 [27.31]	.863 [21.92]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# DUAL ROW LATCHING BI-LOBE® (TYPE WD)

## PANEL MOUNT

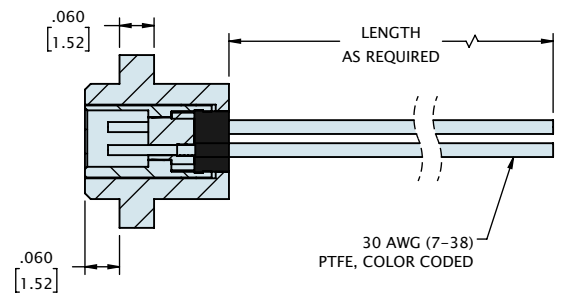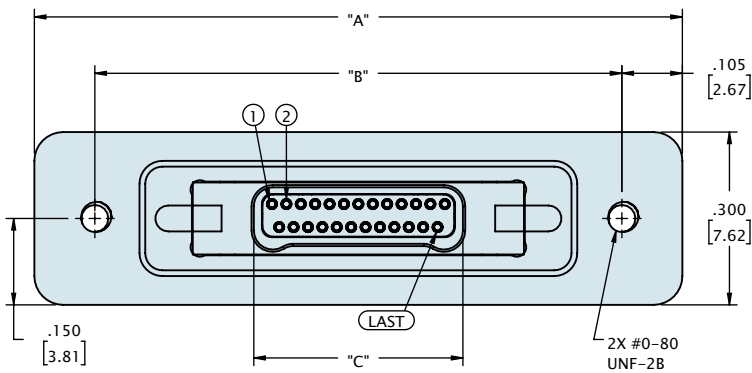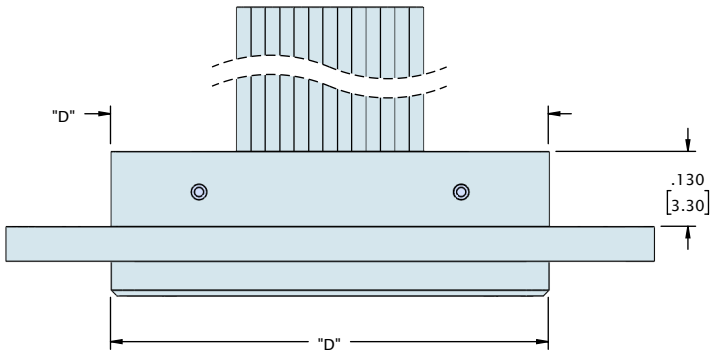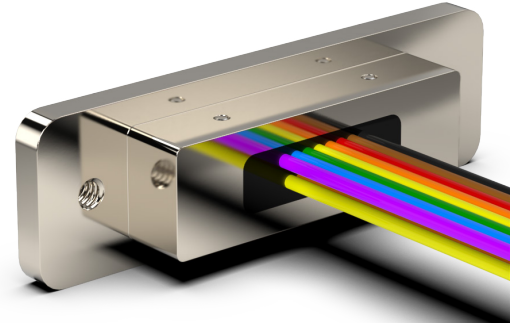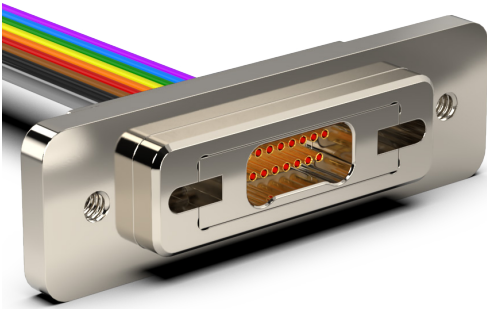


CONTACTS	"A"	"B"	"C"	"D"
09	.925 [23.50]	.715 [18.16]	.163 [4.14]	.560 [14.22]
15	1.000 [25.40]	.790 [20.07]	.238 [6.05]	.635 [16.13]
21	1.075 [27.31]	.865 [21.97]	.313 [7.95]	.710 [18.03]
25	1.125 [28.58]	.915 [23.24]	.363 [9.22]	.760 [19.30]
31	1.200 [30.48]	.990 [25.15]	.438 [11.13]	.835 [21.21]
37	1.275 [32.39]	1.065 [27.05]	.513 [13.03]	.910 [23.11]
51	1.450 [36.83]	1.240 [31.50]	.688 [17.48]	1.085 [27.56]
65	1.625 [41.28]	1.415 [35.94]	.863 [21.92]	1.260 [32.00]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY





## ORDERING GUIDE

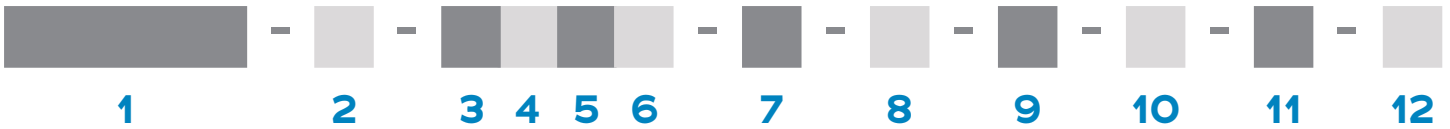

<b>1 Series</b>	<b>MNPL</b> Metal Nano Pin Latch <b>MNSLP</b> Metal Nano Socket Latch Panel	<b>MNSL</b> Metal Nano Socket Latch
<b>2 Number Of Contacts</b>	<b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b> <b>65</b>	
<b>3 Termination Type</b>	<b>AA</b> Horizontal Surface Mount <b>H4</b> Horizontal Thru-Hole	<b>DD</b> Thru-Hole Straight <b>WD</b> Discrete Wires <b>FF</b> Flex Tail
<b>4 Wire Gage*</b>	<b>0</b> 30 AWG (STD)	<b>2</b> 32 AWG
<b>5 Wire Type*</b>	<b>Q</b> NEMA HP3 (formerly M16878/4 and /6)	<b>S</b> M22759/33 (30 AWG only)
<b>6 Wire Length*</b>	<b>18.0</b> 18.00" (STD)	<b>XX.X</b> Custom Length
<b>7 Color Scheme*</b>	<b>C</b> 10 Repeating Colors Per MIL STD 681	<b>Y</b> All Other Wire Colors
<b>8 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless steel Shell, Passivated
<b>9 Common Options</b>	<b>SR</b> Strain Relief ** <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>BS1</b> Standard Straight Backshell <b>BS3</b> 90/RA Oval <b>BSY</b> Custom Backshell	<b>RH</b> RoHS Compliant <b>BS2</b> 45 Oval <b>BS4</b> 2 Piece BS <b>CS</b> Customer Supplied Material
<b>10 Shield / Jacket*</b>	<b>D</b> Slip-on Braid <b>E</b> Machine Braid <b>F</b> Flexo Braid <b>J</b> Nomex Braid <b>ST</b> Shrink Tube	
<b>11 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>12 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

\* WD only

\*\* MNPL & MNSL only

## SINGLE ROW HORIZONTAL SMT (TYPE AA)

Omnetics' **Single Row Horizontal SMT Bi-Lobe®** connectors feature an extremely low-profile package size, making them well-suited for pick-and-place assembly processes. These durable, lightweight connectors feature Omnetics' gold-plated Flex Pin contact system and deliver reliable connectivity in rugged environments. They are spaced on .025" (.64 mm) centerlines and can carry 1 amp per contact. These connectors are available in standard sizes ranging from 5 to 51 positions, as well as custom configurations.



### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact





### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW HORIZONTAL SMT (TYPE AA)

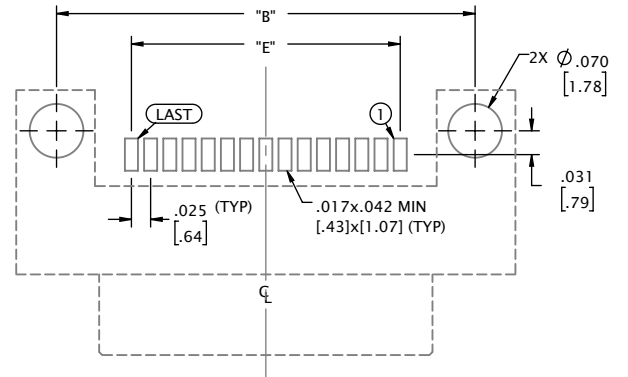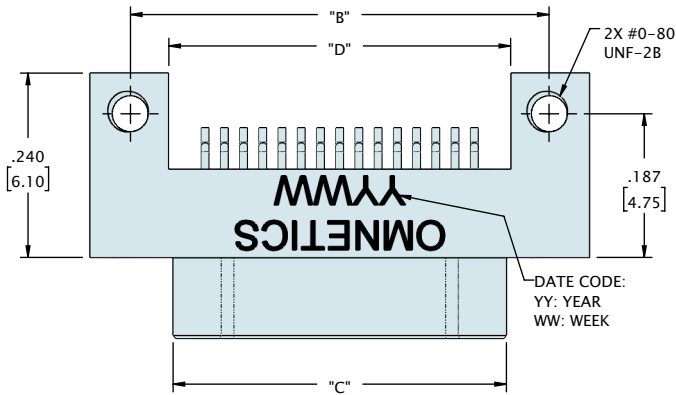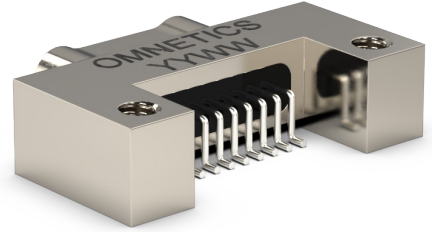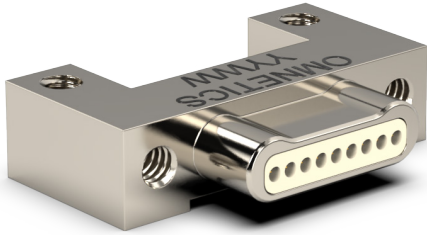




**SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)**

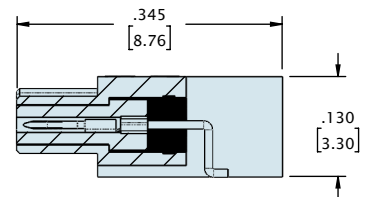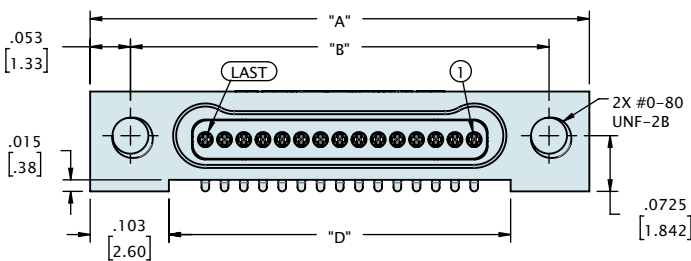



CONTACTS	"A"	"B"	"C"	"D"	"E"
05	.400 [10.16]	.295 [7.49]	.184 [4.67]	.195 [4.95]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.284 [7.21]	.295 [7.49]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.434 [11.02]	.445 [11.30]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.584 [14.83]	.595 [15.11]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.684 [17.37]	.695 [17.65]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.834 [21.18]	.845 [21.46]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.984 [24.99]	.995 [25.27]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.334 [33.88]	1.345 [34.16]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW HORIZONTAL SMT (TYPE AA)

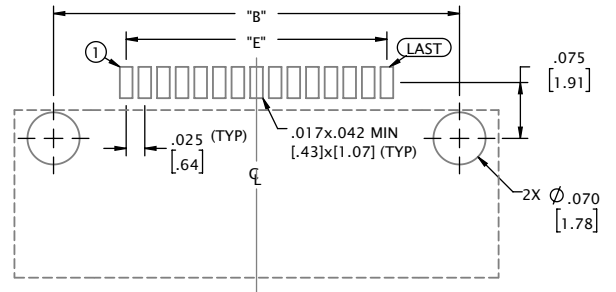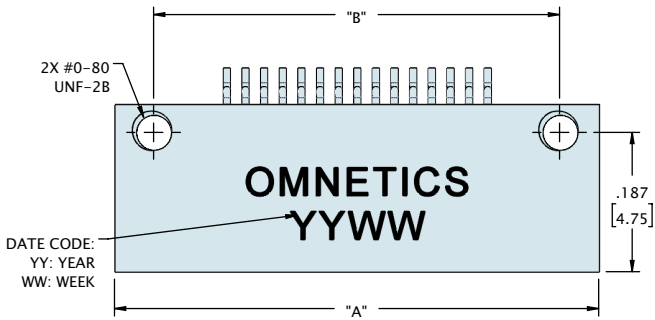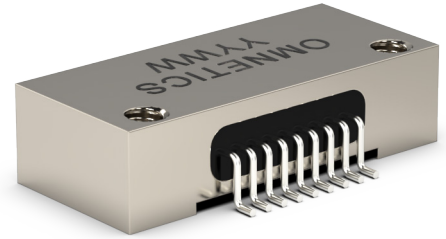


SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

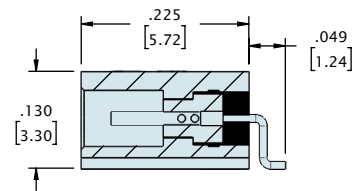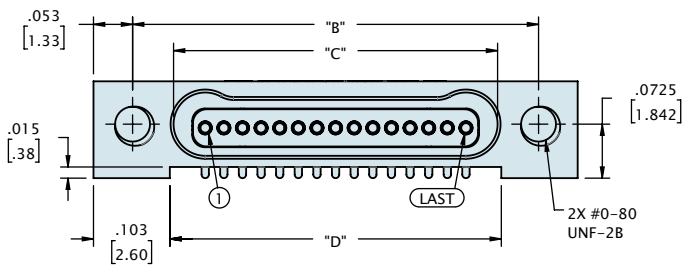

CONTACTS	"A"	"B"	"C"	"D"	"E"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]	.195 [4.95]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]	.295 [7.49]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]	.595 [15.11]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]	.845 [21.46]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]	.995 [25.27]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.335 [33.91]	1.345 [34.16]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


## ORDERING GUIDE

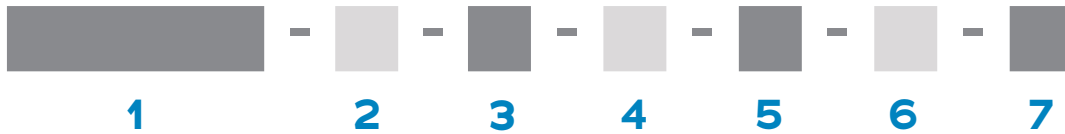

<b>1 Series</b>	<b>MBPS</b> Metal Bi-Lobe Pin Single-Row	<b>MBSS</b> Metal Bi-Lobe Socket Single-Row
<b>2 Number Of Contacts</b>	<b>05</b> <b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b>	
<b>3 Termination Type</b>	<b>AA</b> Horizontal Surface Mount	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes for mounting to the board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

# SINGLE ROW VERTICAL SMT (TYPE VV)

Vertical SMT Bi-Lobe<sup>®</sup> connectors require minimal board space on flex circuits and printed circuit boards, making them an ideal choice for space-constrained applications that operate in rugged environmental conditions. These connectors feature Omnetics' highly reliable gold-plated Flex Pin contact system and are available with threaded mounting holes and retention screws. They are available in a wide range of configurations to meet the needs of a variety of critical applications. Choose from shell materials including titanium, aluminum, and stainless steel, with multiple options for plating materials. These connectors are available in standard sizes ranging from 5 through 51 positions, as well as custom configurations.

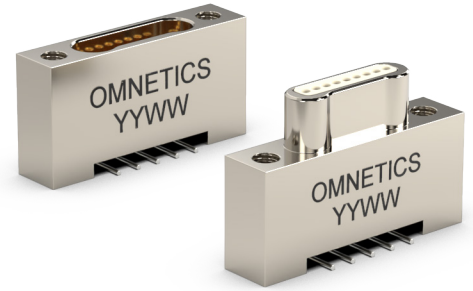

## Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact





## Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



## Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW VERTICAL SMT (TYPE VV)

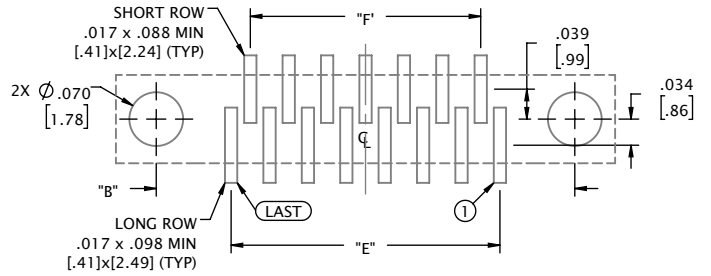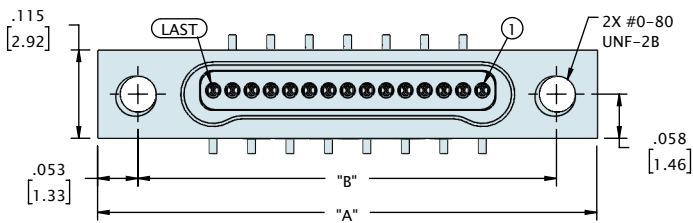



**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

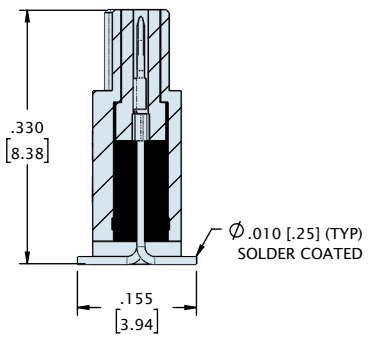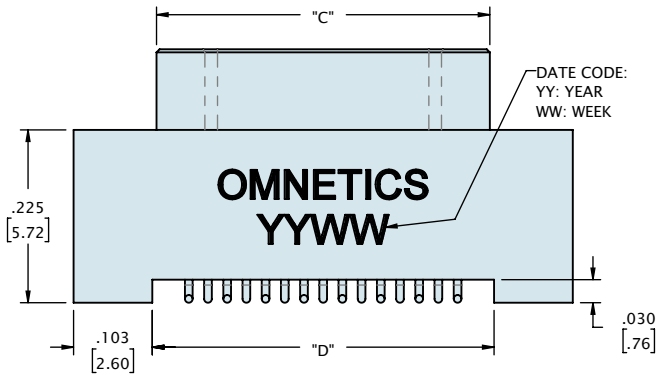



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
05	.400 [10.16]	.295 [7.49]	.206 [5.23]	.195 [4.95]	.100 [2.54]	.050 [1.27]
09	.500 [12.70]	.395 [10.03]	.306 [7.77]	.295 [7.49]	.200 [5.08]	.150 [3.81]
15	.650 [16.51]	.545 [13.84]	.456 [11.58]	.445 [11.30]	.350 [8.89]	.300 [7.62]
21	.800 [20.32]	.695 [17.65]	.606 [15.39]	.595 [15.11]	.500 [12.70]	.450 [11.43]
25	.900 [22.86]	.795 [20.19]	.706 [17.93]	.695 [17.65]	.600 [15.24]	.550 [13.97]
31	1.050 [26.67]	.945 [24.00]	.856 [21.74]	.845 [21.46]	.750 [19.05]	.700 [17.78]
37	1.200 [30.48]	1.095 [27.81]	1.006 [25.55]	.995 [25.27]	.900 [22.86]	.850 [21.59]
51	1.550 [39.37]	1.445 [36.70]	1.356 [34.44]	1.345 [34.16]	1.250 [31.75]	1.200 [30.48]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW VERTICAL SMT (TYPE VV)

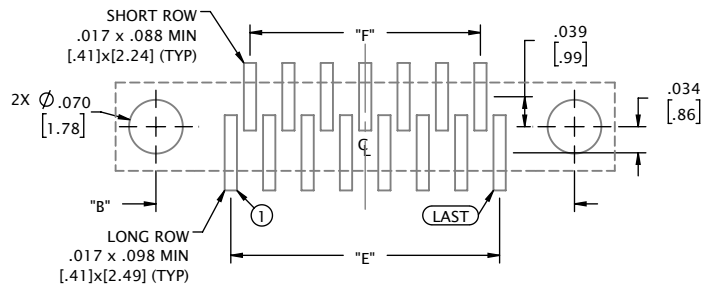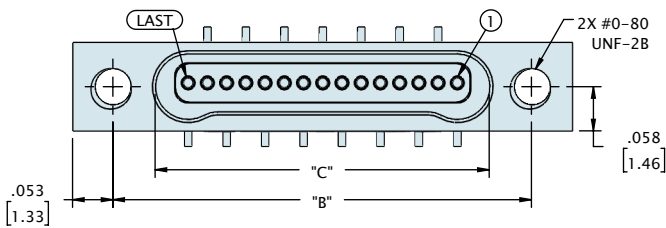

**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

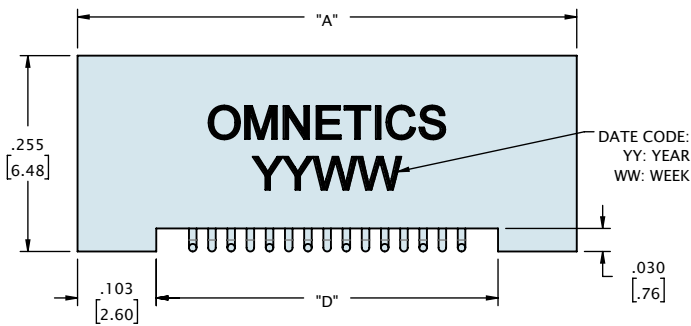


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]	.195 [4.95]	.100 [2.54]	.050 [1.27]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]	.295 [7.49]	.200 [5.08]	.150 [3.81]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.350 [8.89]	.300 [7.62]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]	.595 [15.11]	.500 [12.70]	.450 [11.43]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.600 [15.24]	.550 [13.97]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]	.845 [21.46]	.750 [19.05]	.700 [17.78]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]	.995 [25.27]	.900 [22.86]	.850 [21.59]
51	1.550 [39.37]	1.445 [36.70]	1.335 [33.91]	1.345 [34.16]	1.250 [31.75]	1.200 [30.48]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY



## ORDERING GUIDE

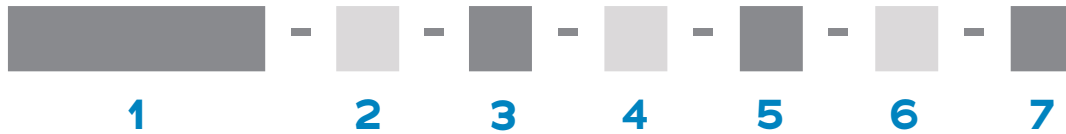

<b>1 Series</b>	<b>MBPS</b> Metal Bi-Lobe Pin Single-Row	<b>MBSS</b> Metal Bi-Lobe Socket Single-Row
<b>2 Number Of Contacts</b>	<b>05</b> <b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b>	<b>37</b> <b>51</b>
<b>3 Termination Type</b>	<b>VV</b> Vertical Surface Mount	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminium Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	<b>EJS</b> End Jack Screw <b>RH</b> RoHS Compliant
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## SINGLE ROW STRAIGHT TAIL (TYPE DD)

The **Single Row Bi-Lobe®** nanos are suitable for high-reliability electronic devices in medical, military, and other demanding environments. They are a thru-hole mounted, low-mass ruggedized connector on .025" (.64 mm) centerlines. The thru-hole tails are spread onto a mounting pattern on .050 (1.27 mm) with space for annular rings and routing traces. They feature Omnetics' gold-plated Flex Pin contact system. These durable, lightweight connectors intermate with Omnetics QPL versions of MIL-DTL-32139. They are available with retention screws for a positive lock and come in standard sizes ranging from 5 to 51 positions. Custom configurations are also available.



### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact




### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW STRAIGHT TAIL (TYPE DD)

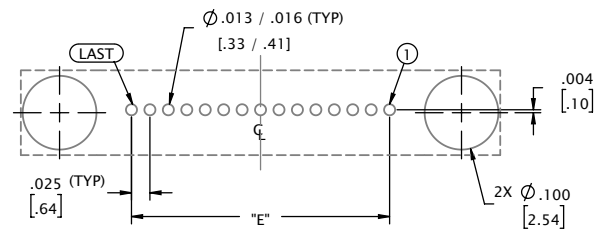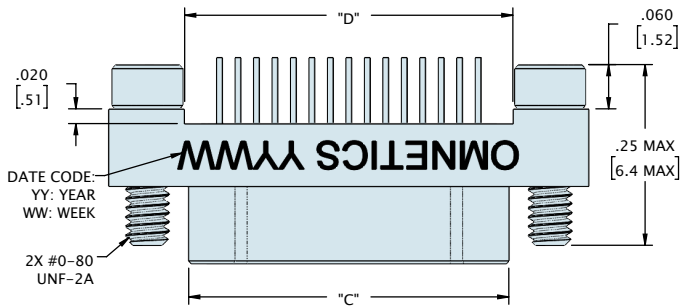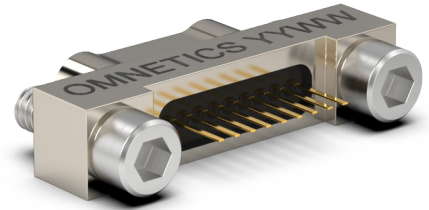

**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)


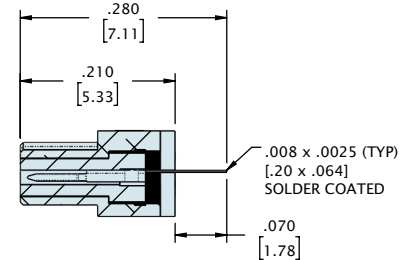
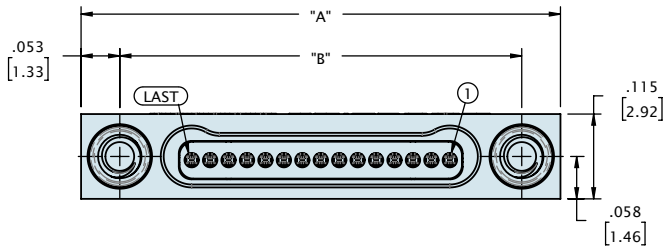


JACKSCREW NOT SHOWN FOR CLARITY



CONTACTS	"A"	"B"	"C"	"D"	"E"
05	.400 [10.16]	.295 [7.49]	.184 [4.67]	.195 [4.95]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.284 [7.21]	.295 [7.49]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.434 [11.02]	.445 [11.30]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.584 [14.83]	.595 [15.11]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.684 [17.37]	.695 [17.65]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.834 [21.18]	.845 [21.46]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.984 [24.99]	.995 [25.27]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.334 [33.88]	1.345 [34.16]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW STRAIGHT TAIL (TYPE DD)

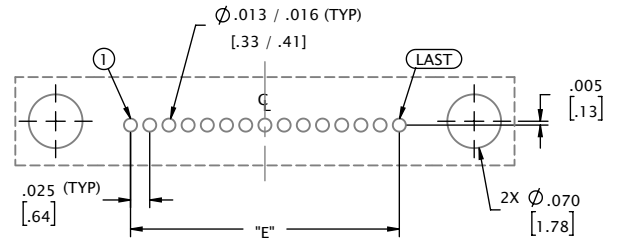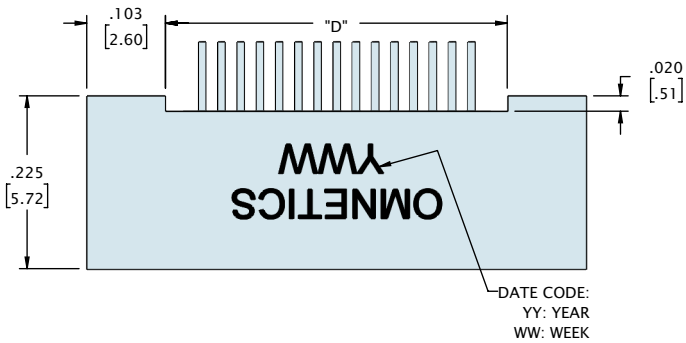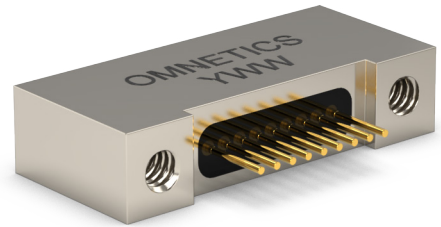


**SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)**

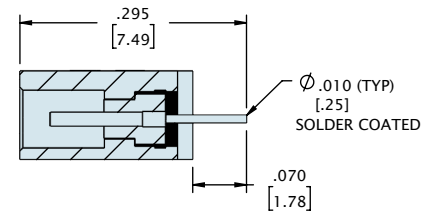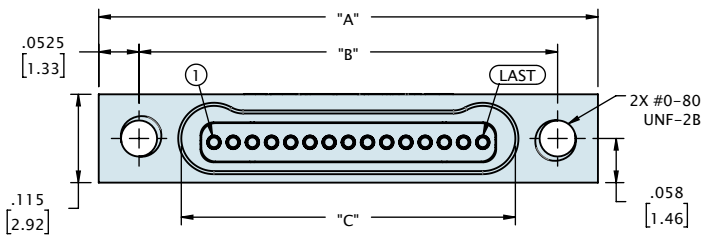

CONTACTS	"A"	"B"	"C"	"D"	"E"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]	.195 [4.95]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]	.295 [7.49]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]	.595 [15.11]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]	.845 [21.46]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]	.995 [25.27]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.355 [34.42]	1.345 [34.16]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


## ORDERING GUIDE

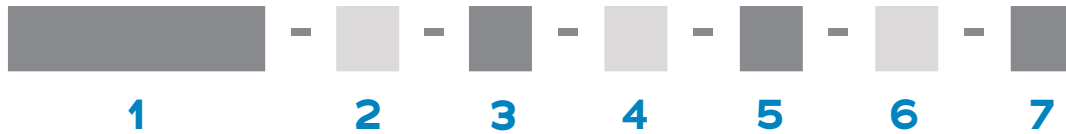

<b>1 Series</b>	<b>MBPS</b> Metal Bi-Lobe Pin Single-Row	<b>MBSS</b> Metal Bi-Lobe Socket Single-Row
<b>2 Number Of Contacts</b>	<b>O5</b> <b>O9</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b>	
<b>3 Termination Type</b>	<b>DD</b> Thru-Hole Straight	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes for mounting to the board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## SINGLE ROW HORIZONTAL THRU-HOLE (TYPE H2)

The **Single Row Bi-Lobe®** H2 nanos are suitable for high-reliability electronic devices in medical, military, and other demanding environments. They are a thru-hole mounted, low-mass ruggedized connector on .025" (.64 mm) centerlines. The thru-hole tails are spread onto a mounting pattern on .050 (1.27 mm) with space for annular rings and routing traces. They feature Omnetics' gold-plated Flex Pin contact system. These durable, lightweight connectors intermate with Omnetics QPL versions of MIL-DTL-32139. They are available with retention screws for a positive lock and come in standard sizes ranging from 5 to 51 positions. Custom configurations are also available.

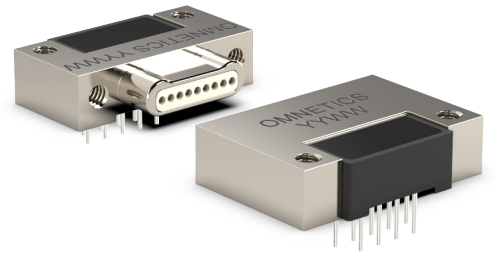

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact





### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW HORIZONTAL THRU-HOLE (TYPE H2)

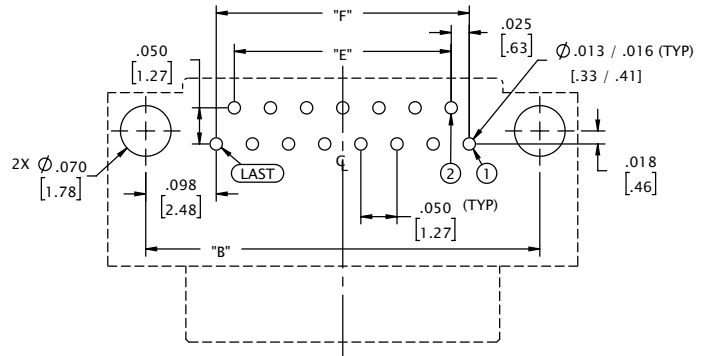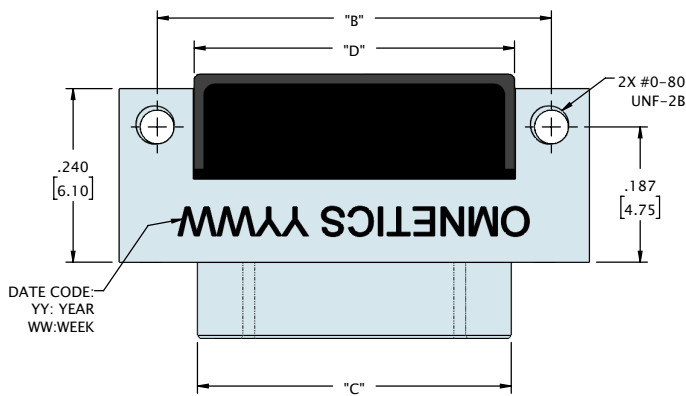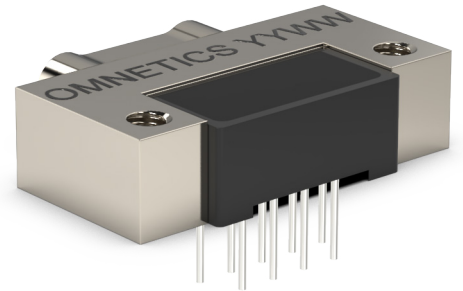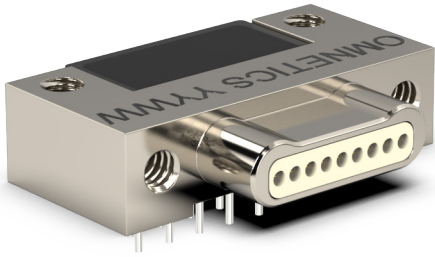




**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

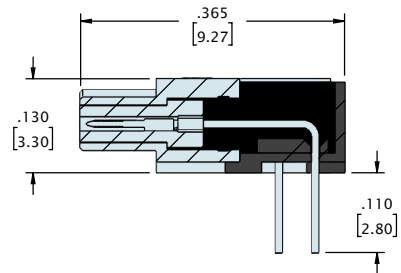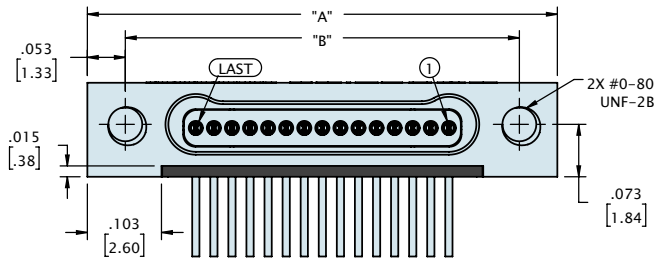



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
05	.400 [10.16]	.295 [7.49]	.184 [4.67]	.193 [4.90]	.050 [1.27]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.284 [7.21]	.293 [7.44]	.150 [3.81]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.434 [11.02]	.443 [11.25]	.300 [7.62]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.584 [14.83]	.593 [15.06]	.450 [11.43]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.684 [17.37]	.693 [17.60]	.550 [13.97]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.834 [21.18]	.843 [21.41]	.700 [17.78]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.984 [24.99]	.993 [25.22]	.850 [21.59]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.334 [33.88]	1.343 [34.11]	1.200 [30.48]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW HORIZONTAL THRU-HOLE (TYPE H2)

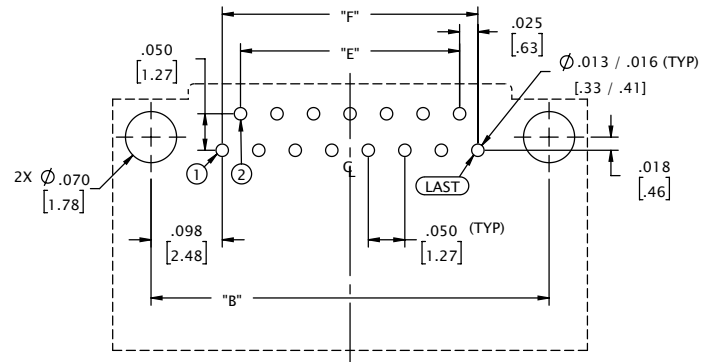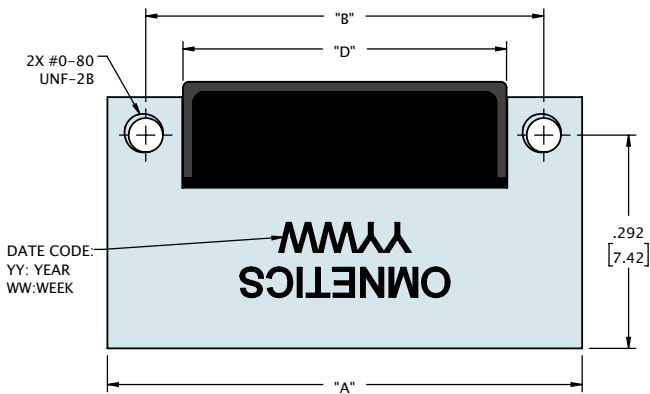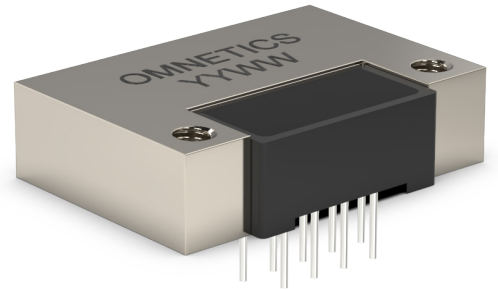

SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)

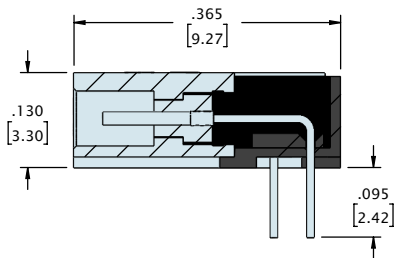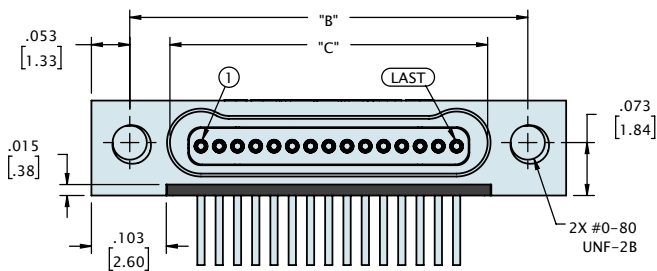


CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]	.193 [4.90]	.050 [1.27]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]	.293 [7.44]	.150 [3.81]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]	.443 [11.25]	.300 [7.62]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]	.593 [15.06]	.450 [11.43]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]	.693 [17.60]	.550 [13.97]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]	.843 [21.41]	.700 [17.78]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]	.993 [25.22]	.850 [21.59]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.335 [33.91]	1.343 [34.11]	1.200 [30.48]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY




## ORDERING GUIDE

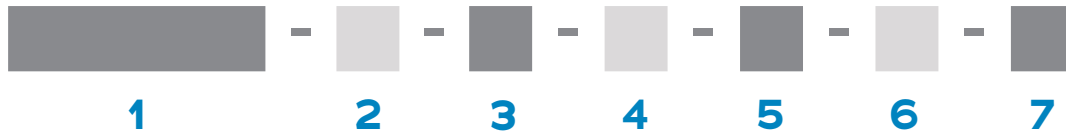

<b>1 Series</b>	<b>MBPS</b> Metal Bi-Lobe Pin Single-Row	<b>MBSS</b> Metal Bi-Lobe Socket Single-Row
<b>2 Number Of Contacts</b>	<b>05</b> <b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b>	
<b>3 Termination Type</b>	<b>H2</b> Horizontal Thru-Hole	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium shell, Cadmium Plated <b>S</b> Stainless steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	<b>EJS</b> End Jack Screw <b>RH</b> RoHS Compliant
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## SINGLE ROW VERTICAL THRU-HOLE (TYPE V2)

Applications that experience frequent high vibration and shock are served well by Omnetics' **Single Row Bi-Lobe**® V2 nanos. This low-mass vertical thru-hole mounted connector has contacts arranged on .025" (.64 mm) centerlines. The thru-hole tails are spread onto a mounting pattern on .050 (1.27 mm) with space for annular rings and routing traces. They feature Omnetics' gold-plated Flex Pin contact system. These durable, lightweight connectors serve the most demanding applications and intermate with Omnetics QPL versions of MIL-DTL-32139. They are available with retention screws for a positive lock and come in standard sizes ranging from 5 to 51 positions. Custom configurations are also available.

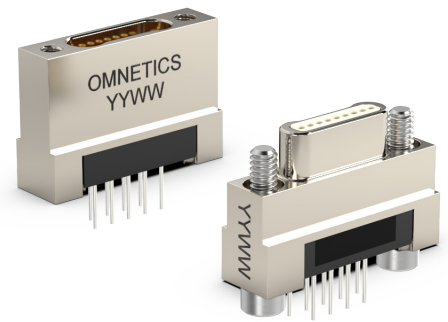

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	87 milliohms (87 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact





### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy



### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW VERTICAL THRU-HOLE (TYPE V2)

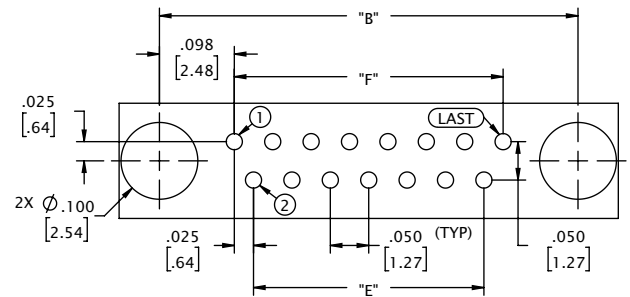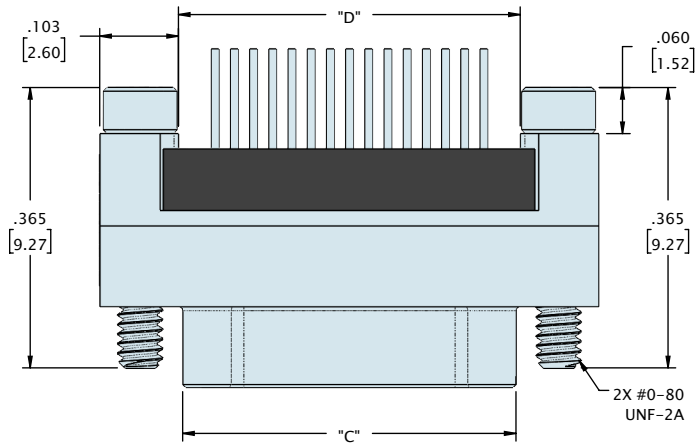



**SUGGESTED PAD LAYOUT**  
(VIEW FROM MOUNTING SIDE OF BOARD)

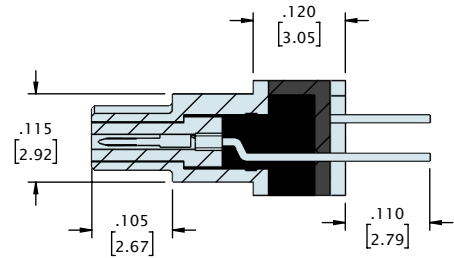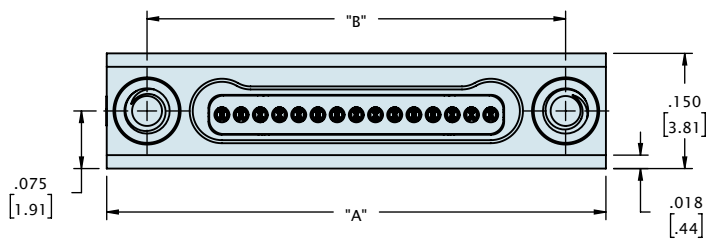



CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
05	.400 [10.16]	.295 [7.49]	.184 [4.67]	.195 [4.95]	.050 [1.27]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.284 [7.21]	.295 [7.49]	.150 [3.81]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.434 [11.02]	.445 [11.30]	.300 [7.62]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.584 [14.83]	.595 [15.11]	.450 [11.43]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.684 [17.37]	.695 [17.65]	.550 [13.97]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.834 [21.18]	.845 [21.46]	.700 [17.78]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.984 [24.99]	.995 [25.27]	.850 [21.59]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.334 [33.88]	1.345 [34.16]	1.200 [30.48]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW VERTICAL THRU-HOLE (TYPE V2)

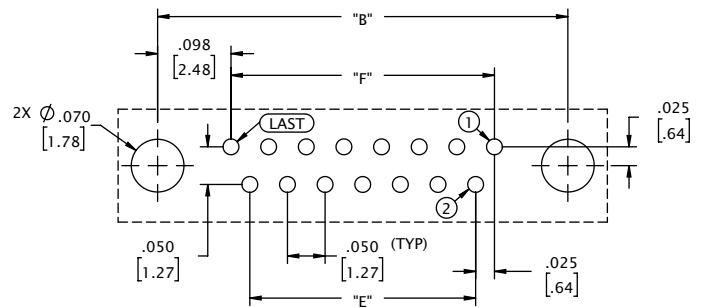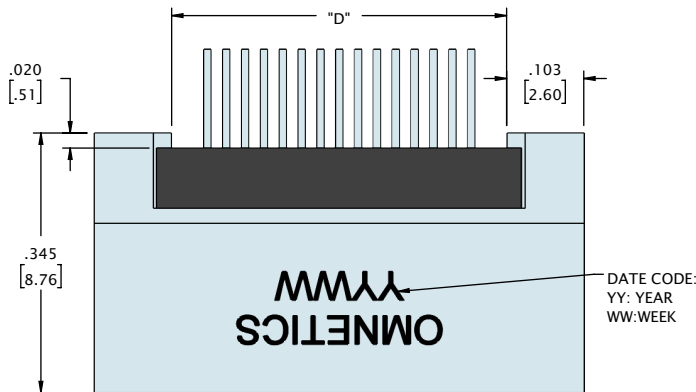

**SUGGESTED PAD LAYOUT  
(VIEW FROM MOUNTING SIDE OF BOARD)**

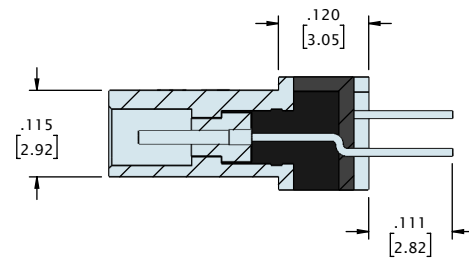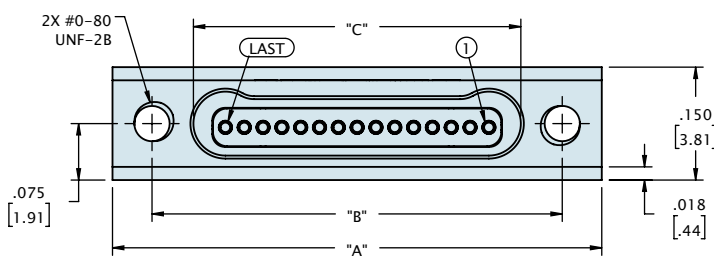

CONTACTS	"A"	"B"	"C"	"D"	"E"	"F"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]	.195 [4.95]	.050 [1.27]	.100 [2.54]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]	.295 [7.49]	.150 [3.81]	.200 [5.08]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]	.445 [11.30]	.300 [7.62]	.350 [8.89]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]	.595 [15.11]	.450 [11.43]	.500 [12.70]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]	.695 [17.65]	.550 [13.97]	.600 [15.24]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]	.845 [21.46]	.700 [17.78]	.750 [19.05]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]	.995 [25.27]	.850 [21.59]	.900 [22.86]
51	1.550 [39.37]	1.445 [36.70]	1.355 [34.42]	1.345 [34.16]	1.200 [30.48]	1.250 [31.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

## ORDERING GUIDE



<b>1 Series</b>	<b>MBPS</b> Metal Bi-Lobe Pin Single-Row	<b>MBSS</b> Metal Bi-Lobe Socket Single-Row
<b>2 Number Of Contacts</b>	<b>05</b> <b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b>	
<b>3 Termination Type</b>	<b>V2</b> Vertical Thru-Hole	
<b>4 Shell Material &amp; Finish</b>	<b>N</b> Aluminium Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium Shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>5 Common Options</b>	<b>ETH</b> End Threaded Hole, #0-80 <b>NTH</b> Non-Threaded Holes For Mounting To The Board <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>CS</b> Customer Supplied Material	
<b>6 Mod Codes</b>	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>7 Special Instructions</b>	<b>YYY</b> Describe anything that is not covered in standard options	

## SINGLE ROW PRE-WIRED (TYPE WD)

Omnetics' **Pre-Wired Single Row Bi-Lobe<sup>®</sup>** nanos feature 30 AWG or smaller sizes of stranded wire. They are assembled using our proprietary semi-automated crimping system, as their very small size requires special care and precision to accomplish a perfect crimp. Each unit is carefully hand-inspected throughout the assembly process. Pre-crimped wires and contacts are potted in place to further protect the integrity of the crimp joint. Designers may specify wire type, size, and color coding to achieve a near-custom part. COTS versions are also available with 18" of color-coded AWG Teflon for quick turnaround. These connectors come in standard sizes ranging from 5 to 51 positions as well as custom configurations. Omnetics also offers full QPL versions of MIL-DTL-32139.



### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact






### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW PRE-WIRED (TYPE WD)

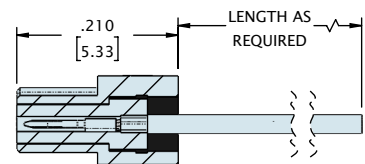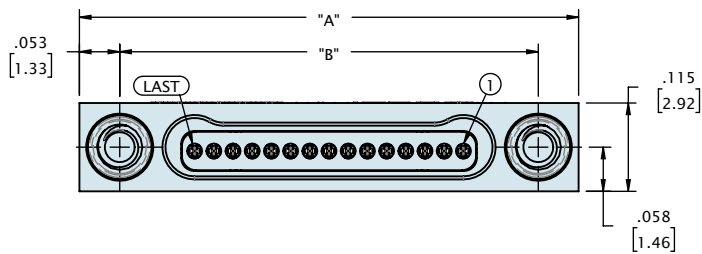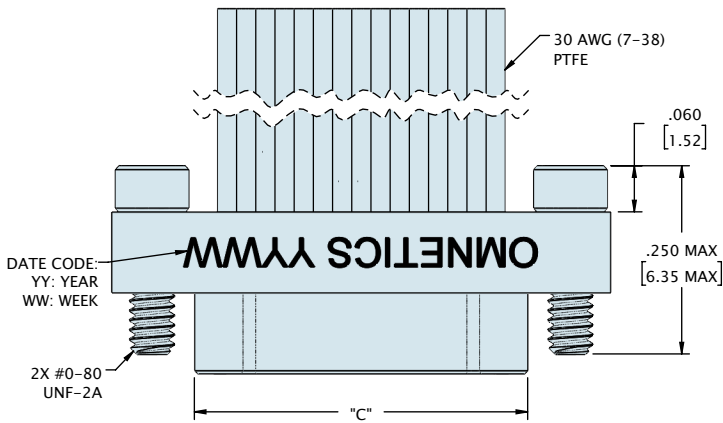
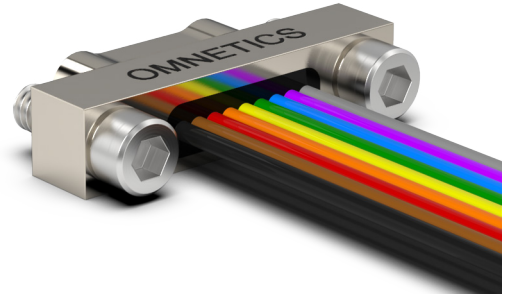
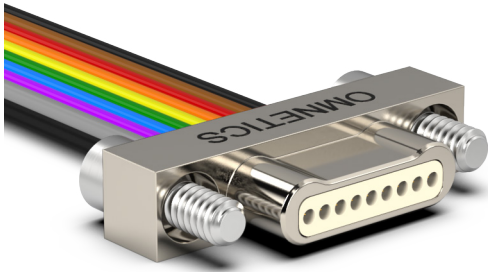


JACKSCREW NOT SHOWN FOR CLARITY

CONTACTS	"A"	"B"	"C"
05	.400 [10.16]	.295 [7.49]	.184 [4.67]
09	.500 [12.70]	.395 [10.03]	.284 [7.21]
15	.650 [16.51]	.545 [13.84]	.434 [11.02]
21	.800 [20.32]	.695 [17.65]	.584 [14.83]
25	.900 [22.86]	.795 [20.19]	.684 [17.37]
31	1.050 [26.67]	.945 [24.00]	.834 [21.18]
37	1.200 [30.48]	1.095 [27.81]	.984 [24.99]
51	1.550 [39.37]	1.445 [36.70]	1.334 [33.88]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW PRE-WIRED (TYPE WD)

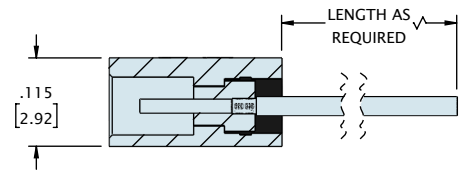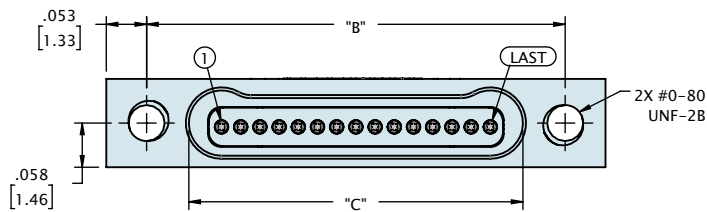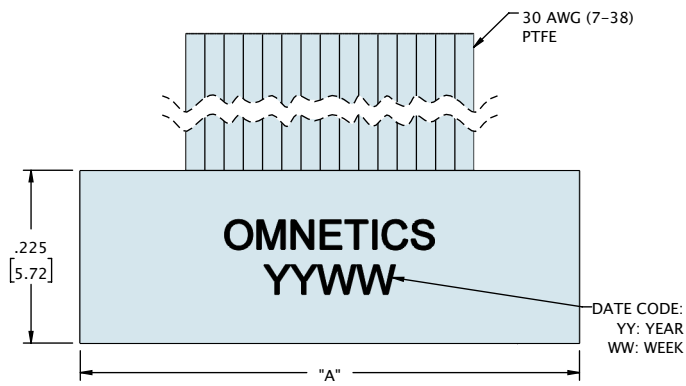


CONTACTS	"A"	"B"	"C"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]
51	1.550 [39.37]	1.445 [36.70]	1.335 [33.91]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY




## ORDERING GUIDE

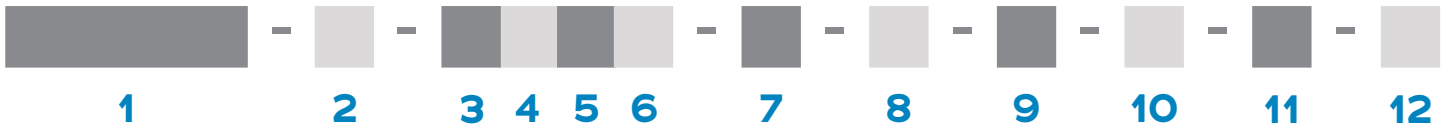

<b>1</b> Series	<b>MBPS</b> Metal Bi-Lobe Pin Single-Row	<b>MBSS</b> Metal Bi-Lobe Socket Single-Row
<b>2</b> Number Of Contacts	<b>05</b> <b>09</b> <b>15</b> <b>21</b> <b>25</b> <b>31</b> <b>37</b> <b>51</b>	
<b>3</b> Termination Type	<b>WD</b> Discrete Wires	
<b>4</b> Wire Gage	<b>0</b> 30 AWG (STD)	<b>2</b> 32 AWG
<b>5</b> Wire Type	<b>Q</b> NEMA HP3 (formerly M16878/4 and /6)	<b>S</b> M22759/33 (30 AWG only)
<b>6</b> Wire Length	<b>18.0</b> 18.00" (STD)	<b>XX.X</b> Custom Length
<b>7</b> Color Scheme	<b>C</b> 10 Repeating Colors Per MIL STD 681	<b>Y</b> All Other Wire Colors
<b>8</b> Shell Material & Finish	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>B</b> Aluminium Shell, Black Anodized <b>T</b> Titanium Shell, Unplated	<b>CD</b> Aluminium Shell, Cadmium Plated <b>S</b> Stainless Steel Shell, Passivated
<b>9</b> Common Options	<b>ETH</b> End Threaded Hole, #0-80 <b>YY</b> Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) <b>HT</b> High Temp. Epoxy <b>BS1</b> Standard Straight Backshell <b>BS3</b> 90/RA Oval <b>BSY</b> Custom Backshell	<b>EJS</b> End Jack Screw <b>RH</b> RoHS Compliant <b>BS2</b> 45 Oval <b>BS4</b> 2 Piece BS <b>CS</b> Customer Supplied Material
<b>10</b> Shield / Jacket	<b>D</b> Slip-on Braid <b>E</b> Machine Braid <b>F</b> Flexo Braid <b>J</b> Nomex Braid <b>ST</b> Shrink Tube	
<b>11</b> Mod Codes	<b>M10</b> Custom Keying <b>M53</b> Space Grade Nano-D, SPT2	<b>M50</b> Space Grade Nano-D, SPT1
<b>12</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options	

## SINGLE ROW JUMPERS (TYPE JUM)

Omnetics' **Single Row Bi-Lobe<sup>®</sup>** harnesses are built to order by Omnetics to ensure maximum flexibility in wire type, size, and color-coding. They are designed to accommodate 30 AWG and smaller stranded wire and feature .025" (.64) centerlines, which makes them an excellent choice for routing multiple lines through confined spaces. They feature Omnetics' gold-plated Flex Pin contact system. Shell material options include aluminum, titanium, and stainless steel, with custom plating options available upon request. These connectors are available in standard sizes ranging from 5 through 51 positions, as well as custom configurations.

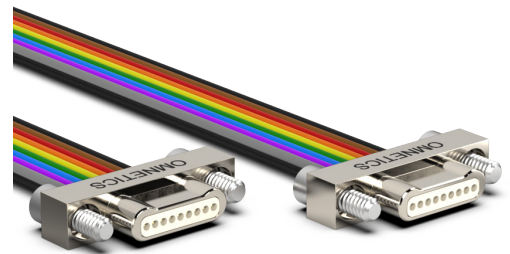

### Electro-Mechanical Specifications

TYPE	PERFORMANCE
Durability	> 2000 Mating Cycles min
Temperature	-55°C to +125 °C (200 °C w/HTE)
Current rating	1 Amp per contact
Voltage Rating (DWV)	250 VAC RMS Sea Level
Insulation Resistance	5,000 Megohms @ 100 VDC
Shock	100 g's discontinuity < 10 nanoseconds
Vibration	20 g's discontinuity < 10 nanoseconds
Thermal Vacuum Outgassing	1.0% max TML, 0.1% VCM
Contact Resistance	71 milliohms (71 mV) max @ 1 Amp
Mating/Unmating Force	2.5 oz. (.71g) typical per contact




### Material Specifications

TYPE	PERFORMANCE
Contact	Copper Alloy Per MIL-DTL-32139
Contact Finish	Gold per ASTM B488, Type II, Class 1.27, Code C Over Nickel Underplate
Insulator	LCP Per MIL-DTL-32139 Or PEEK
Encapsulant	Epoxy

### Shell Options

TYPE	PERFORMANCE
Aluminum 6061	Electroless Nickel per SAE-AMS-2404
Stainless Steel, 300 Series	Passivated per SAE-AMS-2700

# SINGLE ROW MALE TO MALE JUMPERS (TYPE JUM)


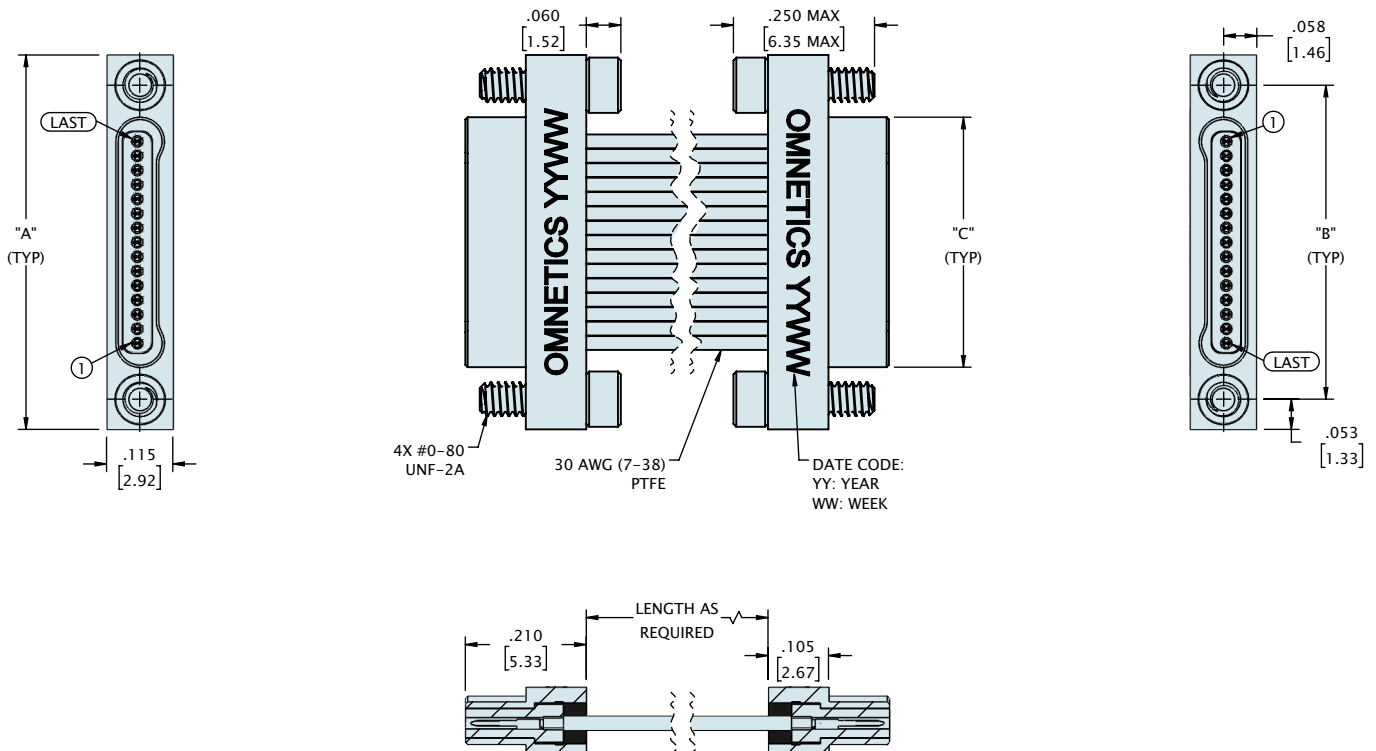
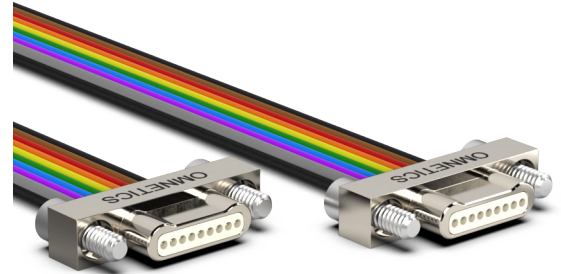
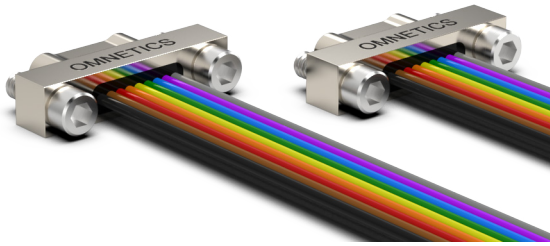


JACKSCREWS HIDDEN FOR CLARITY

CONTACTS	"A"	"B"	"C"
05	.400 [10.16]	.295 [7.49]	.184 [4.67]
09	.500 [12.70]	.395 [10.03]	.284 [7.21]
15	.650 [16.51]	.545 [13.84]	.434 [11.02]
21	.800 [20.32]	.695 [17.65]	.584 [14.83]
25	.900 [22.86]	.795 [20.19]	.684 [17.37]
31	1.050 [26.67]	.945 [24.00]	.834 [21.18]
37	1.200 [30.48]	1.095 [27.81]	.984 [24.99]
51	1.550 [39.37]	1.445 [36.70]	1.334 [33.88]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW MALE TO FEMALE JUMPERS (TYPE JUM)

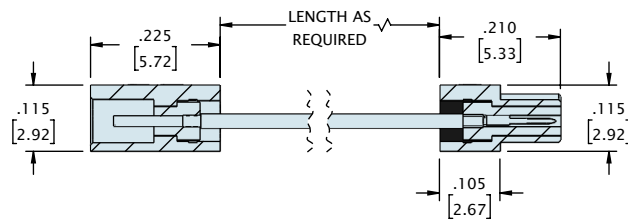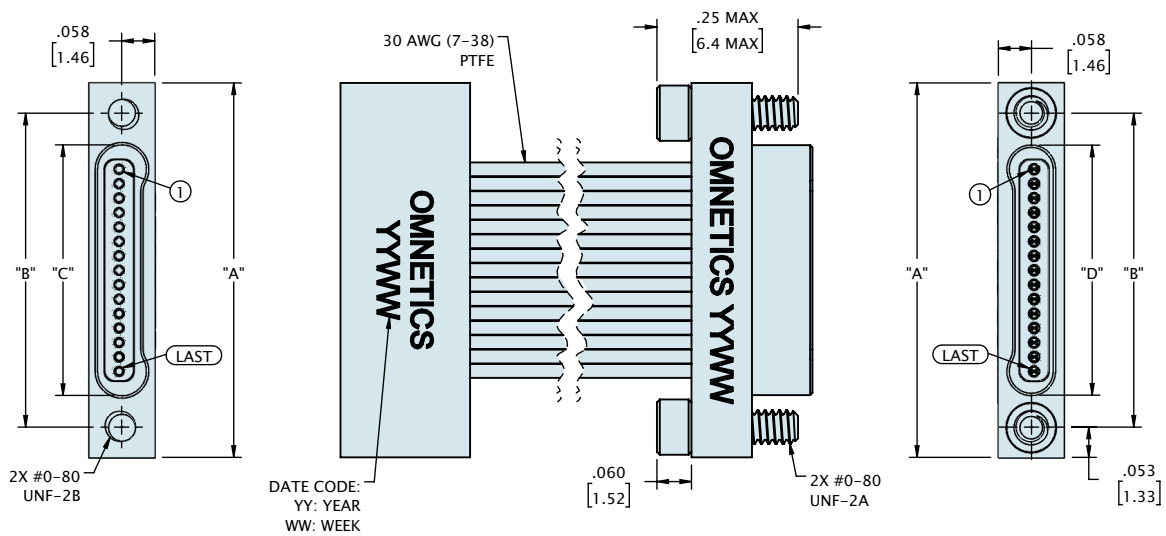
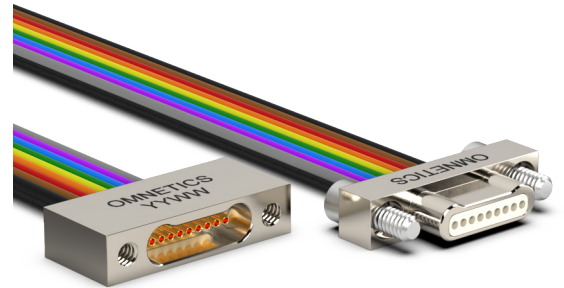
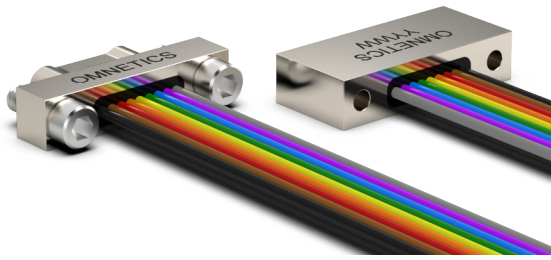


JACKSCREWS HIDDEN FOR CLARITY

CONTACTS	"A"	"B"	"C"	"D"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]	.184 [4.67]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]	.284 [7.21]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]	.434 [11.02]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]	.584 [14.83]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]	.684 [17.37]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]	.834 [21.18]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]	.984 [24.99]
51	1.550 [39.37]	1.445 [36.70]	1.335 [33.91]	1.334 [33.88]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# SINGLE ROW FEMALE TO FEMALE JUMPERS (TYPE JUM)

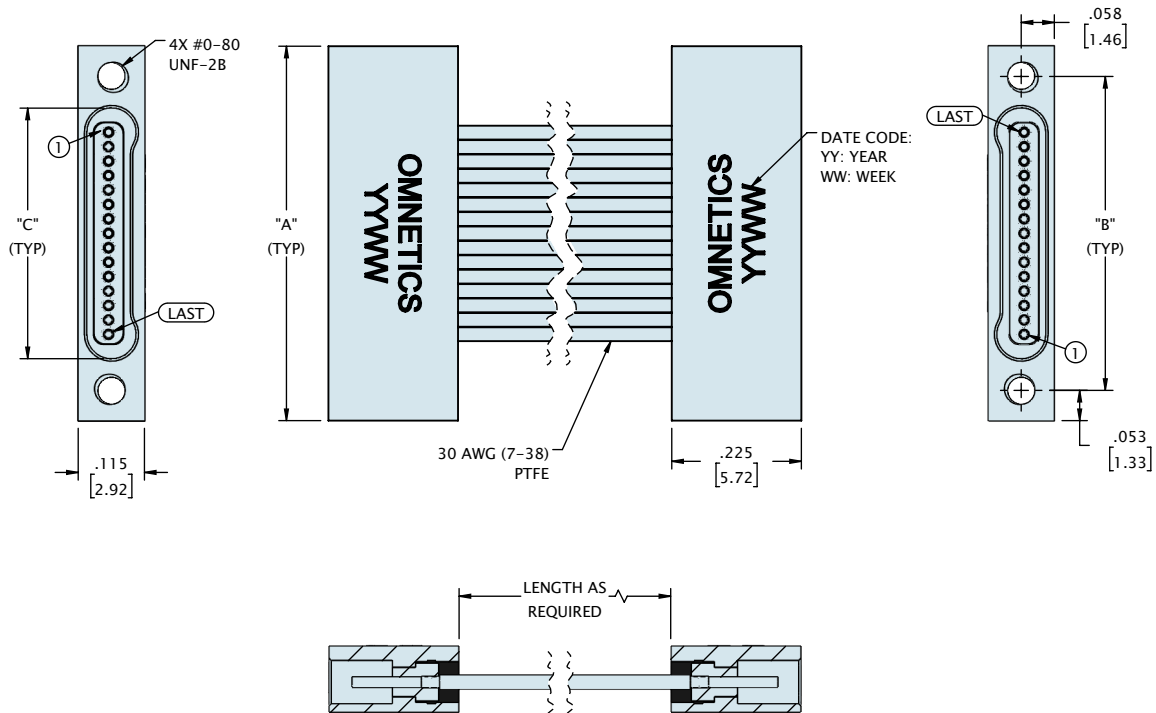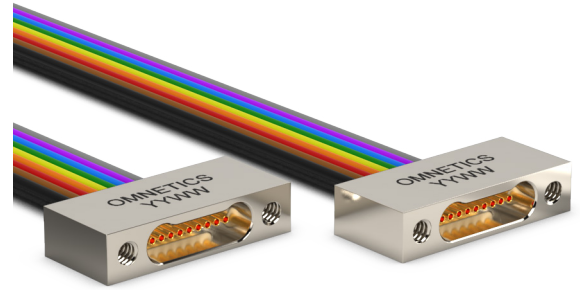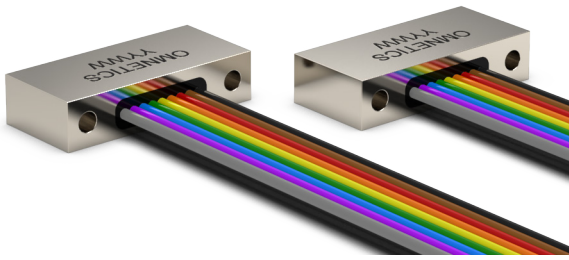

CONTACTS	"A"	"B"	"C"
05	.400 [10.16]	.295 [7.49]	.185 [4.70]
09	.500 [12.70]	.395 [10.03]	.285 [7.24]
15	.650 [16.51]	.545 [13.84]	.435 [11.05]
21	.800 [20.32]	.695 [17.65]	.585 [14.86]
25	.900 [22.86]	.795 [20.19]	.685 [17.40]
31	1.050 [26.67]	.945 [24.00]	.835 [21.21]
37	1.200 [30.48]	1.095 [27.81]	.985 [25.02]
51	1.550 [39.37]	1.445 [36.70]	1.335 [33.91]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


# SINGLE ROW JUMPERS (TYPE JUM)

## ORDERING GUIDE



<b>1</b> Series	<b>JUM</b> Jumpers
<b>2</b> Number Of Contacts	<b>05 09 15 21 25 31 37 51</b>
<b>3</b> Connector 1	<b>MBPS</b> Metal Bi-Lobe Pin Single Row <b>MBSS</b> Metal Bi-Lobe Socket Single Row
<b>4</b> Connector 2	<b>MBPS</b> Metal Bi-Lobe Pin Single Row <b>MBSS</b> Metal Bi-Lobe Socket Single Row
<b>5</b> Termination	<b>WD</b> Discrete Leadwire <b>WC</b> Cable <b>WX</b> Multiple Wire Types <b>TW</b> Twisted Wires
<b>6</b> Wire AWG	<b>0</b> 30 AWG <b>2</b> 32 AWG
<b>7</b> Wire Type	<b>Q</b> NEMA HP3 <b>R</b> M22759/11 <b>S</b> M22759/33 <b>X</b> Other Wire Types
<b>8</b> Wire Length	<b>18.0</b> <b>XX.X</b>
<b>9</b> Color Coded	<b>C</b> 10 Repeating Colors Per MIL STD 681 <b>Y</b> All Other Wire Colors
<b>10</b> Shell / Material Finish	<b>N</b> Aluminum Shell, Electroless Nickel Plated <b>T</b> Titanium Shell, Unplated <b>B</b> Aluminium Shell, Black Anodized <b>CD</b> Aluminium Shell, Cadmium Plated <b>BN</b> Aluminium Shell, Black Nickel Plated <b>P</b> Stainless Steel Shell, Passivated
<b>11</b> Hardware	See table page 103
<b>12</b> Common Options	See table page 103
<b>13</b> Shield / Jacket	<b>D</b> Slip On Metal Braid <b>E</b> Machine Braid <b>F</b> Flexo Braid <b>J</b> Nomex Braid <b>ST</b> Shrink Tube
<b>14</b> Mod Codes	<b>M50</b> Space Grade Micro-D, SPT1 <b>M53</b> Space Grade Micro-D, SPT2
<b>15</b> Special Instructions	<b>YYY</b> Describe anything that is not covered in standard options

## ORDERING GUIDE



### 11 Hardware

- 00** None, Ø .092 Hole (STD)
- 01** Fixed Jack-Posts (STD)
- 02** Jackscrews, STD Length, Hex Head (STD)
- 03** Jackscrews, STD Length, Slotted
- 04** Jackscrews, Long, Hex
- 05** Jackscrews, Long, Slotted
- 06** Float Mount, Front Mounted
- 07** Float Mount, Rear Mounted
- 08** Non-removable
- 13** Fixed Jackspots (STD)
- 14** Jackscrews STD Length, Hex Head (STD)
- 15** One set of each, Fixed Jackspots & Jackscrews, Standard Length, Hex Head (STD)
- YY** Non Standard Hardware

### 12 Common Options





- |                                      |  |
|--------------------------------------|--|
| <b>ETH</b> End Threaded Hole, #0-80  | <b>EJS</b> End Jack Screw              |
| <b>HT</b> High Temp. Epoxy           | <b>RH</b> RoHS Compliant               |
| <b>FP</b> Front Panel Mount          | <b>SR</b> Strain Relief                |
| <b>CS</b> Customer Supplied Material | <b>RP</b> Rear Panel Mount             |
| <b>IS</b> Inline Shell               | <b>OR</b> O-Ring                       |
| <b>OM</b> Overmold                   | <b>BS1</b> Standard Straight Backshell |
| <b>BS2</b> 45 Oval                   | <b>BS3</b> 90/RA Oval                  |
| <b>BS4</b> 2 Piece BS                | <b>BSY</b> Custom Backshell            |

# MOUNTING HARDWARE & TOOLS

Omnetics designs each of our products for maximum ease of use. Our connectors are carefully designed to offer easy handling for new installations, upgrades, and repairs using commonly available tools. We also offer U.S. standard compatible mounting hardware and tools to our customers around the world. Bi-Lobe® and MIL-DTL-32139 connectors with retention and/or mounting features, including panel mount and printed circuit board mountable versions (SMT and thru-hole), typically use a #0-80 screw. Connectors that feature retention screws come with integrated hardware. The screws are held captive within the metal connector housing and act as a positive locking mechanism to hold the mated pair of connectors together even under the most rugged operating conditions. These retention screws feature a standard hex head of .50" (1.27mm).



Please contact Omnetics or your authorized distributor to be sure you have the tools you need to work with U.S. standard hardware.

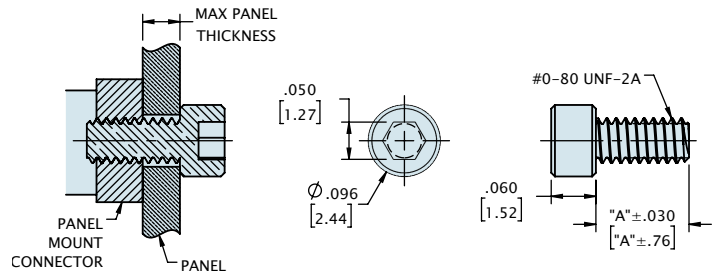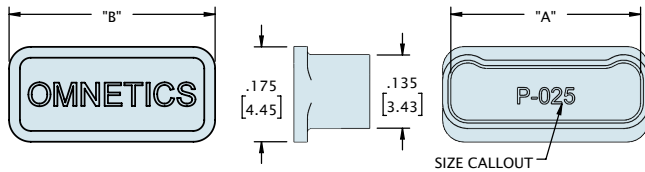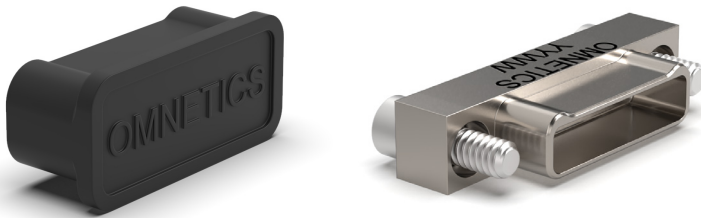

*Metal dustcap available upon request*

PART #	# OF CONTACTS	"A"	"B"
D6912-009	9	.150 [3.81]	.180 [4.57]
D6912-015	15	.225 [5.72]	.255 [6.48]
D6912-021	21	.300 [7.62]	.330 [8.38]
D6912-025	25	.350 [8.89]	.380 [9.65]
D6912-031	31	.425 [10.80]	.455 [11.56]
D6912-037	37	.500 [12.70]	.530 [13.46]
D6912-051	51	.675 [17.15]	.705 [17.91]
D6912-065	65	.850 [21.59]	.880 [22.35]



DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

PART #	"A"	MAX PANEL THICKNESS
D4193-125	.125 [3.18]	.050 [1.27]
D4193-156	.156 [3.97]	.081 [2.06]
D4193-187	.188 [4.76]	.113 [2.86]
D4193-250	.250 [6.35]	.175 [4.45]
D4193-312	.313 [7.94]	.238 [6.03]
D4193-375	.375 [9.53]	.300 [7.62]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY





All of Omnetics' Bi-Lobe® connectors are rated for 200+ mating cycles. To support the requirements of applications that carry unique restrictions, such as limits on mating during programming, test, or burn-in, Omnetics' offers a Connector Saver product that can be mated to the corresponding connector to protect sensitive equipment and extend the life of the Bi-Lobe® connector. The Connector Saver features the Omnetics' gold-plated Flex Pin contact system and offers continuity of performance in a Bi-Lobe® connection. They are spaced on .025" (.64 mm) centerlines and can carry 1 amp per contact.

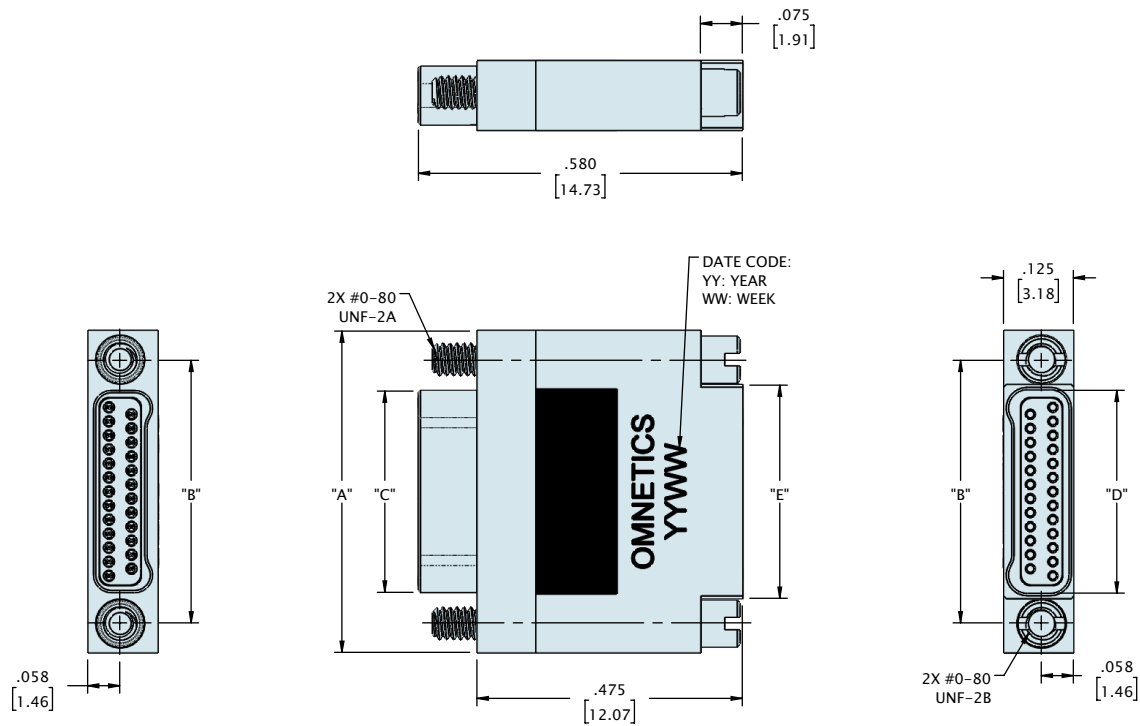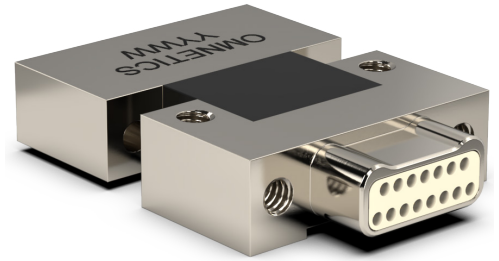


PART #	CONTACTS	"A"	"B"	"C"	"D"	"E"
A40838-009	09	.375 [9.53]	.270 [6.86]	.160 [4.06]	.163 [4.14]	.182 [4.62]
A40838-015	15	.450 [11.43]	.345 [8.76]	.235 [5.97]	.238 [6.05]	.257 [6.52]
A40838-021	21	.525 [13.34]	.420 [10.67]	.310 [7.87]	.313 [7.95]	.332 [8.43]
A40838-025	25	.575 [14.61]	.470 [11.94]	.360 [9.14]	.363 [9.22]	.382 [9.70]
A40838-031	31	.650 [16.51]	.545 [13.84]	.435 [11.05]	.438 [11.13]	.457 [11.60]
A40838-037	37	.725 [18.42]	.620 [15.75]	.510 [12.95]	.513 [13.03]	.532 [13.51]
A40838-051	51	.900 [22.86]	.795 [20.19]	.685 [17.40]	.688 [17.48]	.707 [17.95]
A40838-065	65	1.075 [27.31]	.970 [24.64]	.860 [21.84]	.863 [21.92]	.882 [22.40]
A40838-085	85	1.325 [33.66]	1.220 [30.99]	1.110 [28.19]	1.113 [28.27]	1.132 [28.75]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY


# PANEL MOUNT CUTOUT

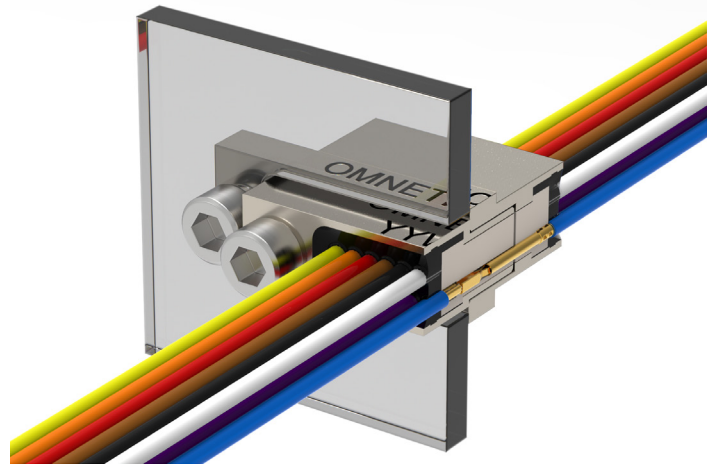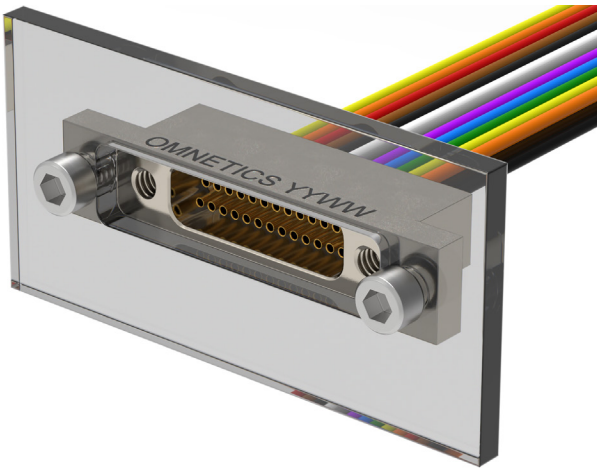

STANDARD CUTOUT

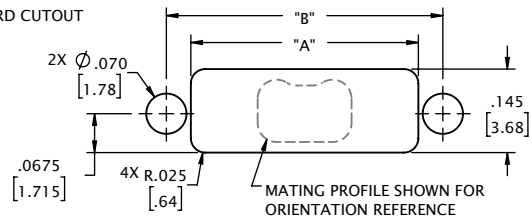

ALTERNATIVE CUTOUT

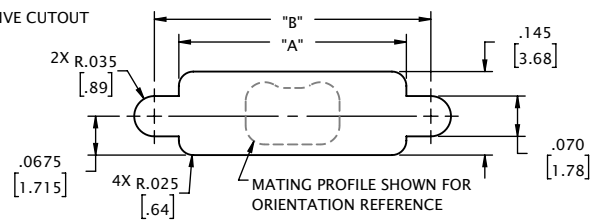

CONTACTS	"A"	"B"
09	.395 [10.03]	.480 [12.19]
15	.470 [11.94]	.555 [14.10]
21	.545 [13.84]	.630 [16.00]
25	.595 [15.11]	.680 [17.27]
31	.670 [17.02]	.755 [19.18]
37	.745 [18.92]	.830 [21.08]
51	.920 [23.37]	1.005 [25.53]
65	1.095 [27.81]	1.180 [29.97]
85	1.345 [34.16]	1.430 [36.32]

DIMENSIONS IN [ ] ARE IN MILLIMETERS AND ARE FOR REFERENCE ONLY

# OMNETICS

CONNECTOR CORPORATION



## SPACE

Missile Warning  
SATCOM  
PNT Signals  
ISR



## COMMAND

GPS Guided Artillery  
IR Guided Missiles  
High Power Microwaves



## AIR

IO Broadcast  
Radar EA  
IFF Signals




## WATER

Radar Guided Missiles  
RF Sensors  
Laser Comms







## LAND

Tracking Radars  
Laser Dazzler  
Laser Guided Munition

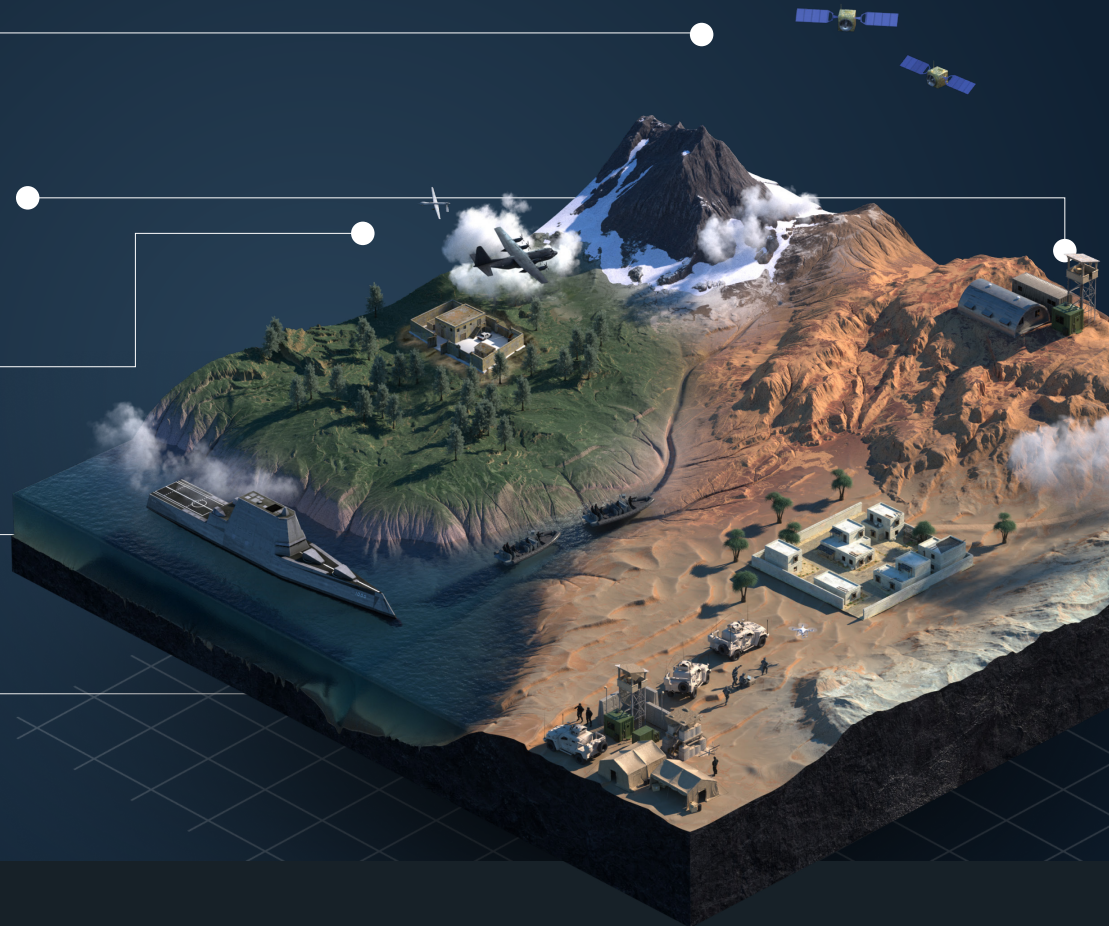

**Ruggedize micro-miniature interconnect solutions for high reliability applications.**

Omnetics' connectors are proven to deliver exceptional performance in extreme environments for mission-critical applications.



## THE IMPRESSIVE NANO-D CONNECTOR

### NEW STANDARD

Omnetics' Nano-D connectors serve mainly in military and aerospace applications. These devices and the modern chip technology that makes them possible impact circuit board designs as well as connector and cable selections. They are fueling the demand for miniaturization at lower voltages and current levels. Our Nano-D connectors serve design engineers well in this new era.

### HIGH RELIABILITY

Nano-D connectors are designed to perform at military specification levels for high reliability and to remain working in both portable applications and extreme environments. Most Nano-D connectors evolved rather directly from the older Micro-D connectors and follow similar specifications. As speeds go up, the wavelength of each signal is shorter, and at lower voltages, vibration and circuit noise could confuse the signal. Nano-D connector resistance is kept as low as 12 to 15 milliohms with a capacitance of 2.0pf to 2.4pf, which is ideal for most circuits with low current flow and low voltage.

### APPLICATION-SPECIFIC

Portable high-speed digital signal processing devices are expanding the demand for small, lightweight cable and connectors. Nano-D connectors are especially well suited for these ruggedized, environmentally sensitive applications. When specified, cable, signal-speed capability, and formats are designed to match the ultra-small Nano-D connectors. Designs include IEEE 1394 fire-wire cable and extend to USB 3.1 formats and CAT 6a wiring. Many of these formats support a wide range of new designs, ranging from circuitry used in small military unmanned vehicles to soldier-worn equipment.



Omnetics Connector Corporation  
Minneapolis, MN, USA  
Phone: 763-572-0656  
Fax: 763-572-3925